


Ballast Housing |

Aluminum standard housing with cover plate included : for ballast mounting in architectural or concealed applications

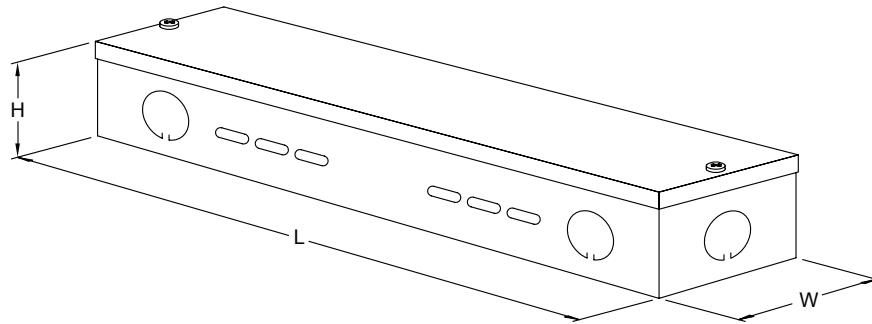

ENCLOSURE STYLE 1	L = 15-1/8"	W = 3-1/8"	H = 1-7/8"
ENCLOSURE STYLE 2	L = 23-1/8"	W = 3-1/8"	H = 1-7/8"

Alternate ballast housings are available. (Consult factory for other options)

model no.	description	
-----------	-------------	--

T8 REMOTE BALLAST | With surface mount enclosure for BFL250, BFL250-S, BFL252, BDS810 T8 fixtures

Note: Catalog number includes instant start ballast. For rapid start wiring, add suffix "/RS" to catalog number. Consult factory for three lamp, four lamp and low wattage ballast options.

	Lamp Operation	Enclosure Style
BFB813-1/120 /277	1 x 13W T8	1
BFB813-2/120 /277	2 x 13W T8	1
BFB814-1/120 /277	1 x 14W T8	1
BFB814-2/120 /277	2 x 14W T8	1
BFB815-1/120 /277	1 x 15W T8	1
BFB815-2/120 /277	2 x 15W T8	1
BFB817-1/UNV	1 x 17W T8	1
BFB817-2/UNV	2 x 17W T8	1
BFB825-1/UNV	1 x 25W T8	1
BFB825-2/UNV	2 x 25W T8	1
BFB832-1/UNV	1 x 32W T8	1
BFB832-2/UNV	2 x 32W T8	1

model no.	description	
	Lamp Operation	Enclosure Style
BFB840-1/UNV	1 x 40W T8	1
BFB840-2/UNV	2 x 40W T8	1
BFB859-1/UNV	1 x 59W T8	1
BFB859-2/UNV	2 x 59W T8	1

OPTIONS | T8 REMOTE BALLAST

/CU Custom powder coat finish

T8 REMOTE DIMMING | Listed by manufacturer

Note: Customer responsible for compatibility between dimming ballast and control system. Note remote distance limitations.
Lamp coverage by a specific manufacturer subject to change without notice. Consult factory for availability of models by manufacturers not listed below.

	Lamp Operation	Enclosure Style
ADVANCE MARK VII Dims to 5% 0-10V analog control Remote distance = VARIES (Consult factory for specific application)		
BFB817-1/UNVVII	17W T8	1
BFB817-2/UNVVII	2 x 17W T8	1
BFB825-1/UNVVII	25W T8	1
BFB825-2/UNVVII	2 x 25W T8	1
BFB832-1/UNVVII	32W T8	1
BFB832-2/UNVVII	2 x 32W T8	1

ADVANCE MARK X POWERLINE | Dims to 1% | 2-wire line voltage control | Remote distance = VARIES
 (Consult factory for specific application)

BFB817-1/120MKX	17W T8	1
BFB817-1/277MKX	17W T8	1
BFB817-2/120MKX	2 x 17W T8	1
BFB817-2/277MKX	2 x 17W T8	1
BFB825-1/120MKX	25W T8	1
BFB825-1/277MKX	25W T8	1
BFB825-2/120MKX	2 x 25W T8	1
BFB825-2/277MKX	2 x 25W T8	1
BFB832-1/120MKX	32W T8	1
BFB832-1/277MKX	32W T8	1
BFB832-2/120MKX	2 x 32W T8	1
BFB832-2/277MKX	2 x 32W T8	1

LUTRON ECO-10 | Dims to 10% | 3-wire line voltage phase control | Remote distance = 7' to the farthest lamp holder
 (deduct fixture length to determine net distance to the ballast enclosure)

BFB817-1/120ECO	17W T8	1
BFB817-1/277ECO	17W T8	1

model no.	description	
LUTRON ECOSYSTEM	Dims to 10% Digital and 3-wire line voltage phase control Remote distance = 7' to the farthest lamp holder (deduct fixture length to determine net distance to the ballast enclosure)	
BFB817-1/UNVESYS	17W T8	2
BFB817-2/UNVESYS	2 x 17W T8	2
BFB825-1/UNVESYS	25W T8	2
BFB825-2/UNVESYS	2 x 25W T8	2
BFB832-1/UNVESYS	32W T8	2
BFB832-2/UNVESYS	2 x 32W T8	2

	Lamp Operation	Enclosure Style
LUTRON HI-LUME 3D	Dims from 100% or 117% to 1% 2-wire digital and 3-wire line voltage phase control Remote distance = 7' to the farthest lamp holder (deduct fixture length to determine net distance to the ballast enclosure)	
100% to 1%		
BFB817-1/UNVH300	17W T8	2
BFB817-2/UNVH300	2 x 17W T8	2
BFB825-1/UNVH300	25W T8	2
BFB825-2/UNVH300	2 x 25W T8	2
BFB832-1/UNVH300	32W T8	2
BFB832-2/UNVH300	2 x 32W T8	2
117% to 1%		
BFB817-1/UNVH317	17W T8	2
BFB817-2/UNVH317	2 x 17W T8	2
BFB825-1/UNVH317	25W T8	2
BFB825-2/UNVH317	2 x 25W T8	2
BFB832-1/UNVH317	32W T8	2
BFB832-2/UNVH317	2 x 32W T8	2

LUTRON TU-WIRE	Dims to 5% 2-wire line voltage control Remote distance = 7' to the farthest lamp holder (deduct fixture length to determine net distance to the ballast enclosure)	
BFB817-2/120TWR	2 x 17W T8	2
BFB825-1/120TWR	25W T8	2
BFB825-2/120TWR	2 x 25W T8	2
BFB832-1/120TWR	32W T8	2
BFB832-2/120TWR	2 x 32W T8	2

OPTIONS | T8 REMOTE DIMMING

/CU

Custom powder coat finish