



2-1/8" wide LED luminaire with drop lens


#### Project: \_

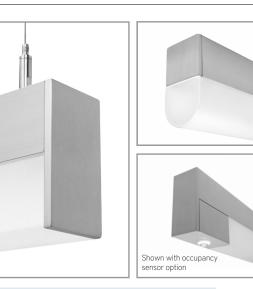

<u>10 DAY</u> QuickShip Highlighted fields denote QuickShip Options. See complete 10-Day QuickShip Terms and Conditions available at www.bartcolighting.com/quickship-products/ Purchase order must reference "QuickShip".

SECTION





PERFORMANCE

Note: All data reflects fixtures with 3500K LEDs and rectangular profile and solid ends

_	NOMINAL LENGTH	OUTPUT	LUMENS/ft.	WATTS/ft.	LUMINAIRE LUMENS	EFFICACY (LPW)
	A/	L: low	600	5.0	2244	120
	4	R: regular	1000	8.5	3736	118

\_ Туре: \_\_\_\_

#### FEATURES

The BSS210 is a linear LED luminaire for general lighting applications. The 2-1/8" wide extruded aluminum housing is capped by a 2" tall, rectangular or rounded profile frosted acrylic lens that produces a wide distribution of diffuse illumination. 1/4" thick machined aluminum end caps finish off the fixture ends. Fixture with certain options available for 10-Day QuickShip.

#### SPECIFICATIONS

Fixture constructed of an extruded aluminum housing, extruded, frosted acrylic lens and machined aluminum end caps

Model variations offered in rectangular or rounded profiles for surface and wall mount or cable suspended applications with solid or luminous end options

Standard finishes as shown below

Available in nominal lengths of  $2^\prime \text{--} 8^\prime$  single fixtures and continuous runs

Basic continuous run fixtures provided with 18 ga. wiring harness for 6 Amp maximum load (consult factory for runs requiring multiple circuits, sensor integration, etc.)

Standard integral 120-277V driver offered with 0-10V dimming or non-dim (other dimming driver options available)

Integral 120-277V emergency battery backup available for 4' nominal non-dim or 0-10V (consult factory for all other lengths/drivers)

Standard light outputs are 600 or 1000 lumens per foot

LEDs available in 3000K, 3500K, 4000K and 5000K, within a 3 step MacAdam ellipse, all with 80+ CRI typical

Life: 50,000 hours L<sub>70</sub>

Passive infrared occupancy sensor available (FOR RECTANGULAR PROFILE ONLY)

#### Limited five year warranty

UL and C-UL listed for dry and damp locations



BSS210 -										
-	-	-	- [		-	- [	-		] -	_
NOMINAL	CORRELATED	DRIVER		LENS			MOUNT			FINISH
FIXTURE LENGTH*	COLOR TEMPERATURE	ND: non-dimming [Dimming]		A: rectangul – solid end	ar profile		SM: surface mou WD: wall mount			AW: architectural white (semi-matte)
2: 22-3/4" 3: 33-3/4"	30: 3000K-80+ CRI 35: 3500K-80+ CRI	D: 0-10V, 1%		B: rectangul – luminous e			C4: cable mount cable length	: 4'		WH: white (semi-gloss)
4: 44-3/4"	40: 4000K-80+ CRI	(120V ONLY)		C: rounded p solid end	orofile –		C8: cable mount	: 8'		BL: black (semi-matte)
5: 55-3/4" 6: 66-3/4"	50: 5000K-80+ CRI	low voltage, 1%,		D: rounded   luminous en			CF: consult fact			MB: matte black
7: 77-3/4		(120V ONLY) HES: Lutron EcoSys-		1	_		custom mountin	g		ESS: environmental satin silver
8: 88-3/4"		tem, soft-on/fade-to- black, 1%	LIGHT	OUTPUT	OPTION	IS				BZ: bronze
		EL: eldoLED ECO-	_	per foot)			(4' non-dim or	RUN CON	1-	PR: primer
		drive, 0-10V, 1%	L: low – 6	500	0-10V only		•	FIGURATI	ON	CF: consult factory for custom finish
		ES: eldoLED SOLO- drive 0-10V, 0.1%	R: regula				100%–0% ‡	SN: single		
		ELD: eldoLED ECO-		ult factory m output			100%–50% ‡	ST: starter		SA: satin anodize (may require
		drive DALI, 1%	ior custo	moutput			, 100%–0% ‡	AD: adder		additional lead time)
<ul> <li>Actual dimension d</li> </ul>		ESD: eldoLED SOLO-					100%–50% ‡	TR: terminat	or	
configuration and s ‡ See options section		drive DALI, 0.1%					, 100%–0% ‡			
+ 000 0ptions section	nor details.				S3B: occ s	ensor pos.3,	100%–50% ‡			

©2023 Bartco Lighting, Inc. These products are protected by patents and patents pending. Unauthorized use or reproduction of illustrations, photographs or text is prohibited. Bartco Lighting reserves the right to discontinue products or to change the technical and/or design specifications at any time.

2-1/8" wide LED luminaire with drop lens

LENS



 ORDERING CODE	DESCRIPTION	SPECIFICATIONS
А	RECTANGULAR SOLID END	Rectangular profile with full height aluminum end cap
В	RECTANGULAR LUMINOUS END	Rectangular profile with aluminum end cap and frosted acrylic lens end
С	ROUNDED SOLID END	Rounded profile with full height aluminum end cap
D	ROUNDED LUMINOUS END	Rounded profile with aluminum end cap and frosted acrylic lens end

ORDERING CODE	DESCRIPTION	SPECIFICATIONS
ED	EMERGENCY LED DRIVER	<ul> <li>Universal 120-277V input voltage emergency driver delivers initial minimum power of 10W for 90 minutes</li> <li>Available for 4' nominal length non-dim or 0-10V fixture only (consult factory for all other lengths/drivers)</li> </ul>
	OCCUPANCY SENSOR	<ul> <li>Passive infrared occupancy sensor with hold-off daylighting adjustment (10-120 foot candles) and time delay adjustment from 30 seconds to 30 minutes</li> <li>AVAILABLE FOR RECTANGULAR PROFILE ONLY</li> <li>Sensor adds 4" to overall fixture length</li> <li>Consult factory for custom output</li> </ul>
S1A	Occupancy sensor – position 1, 100% – 0%	Sensor located on the top at an end, with 100% – 0% light output setting
S1B	Occupancy sensor – position 1, 100% – 50%	Sensor located on the top at an end, with 100% – 50% light output setting

```
©2023 Bartco Lighting, Inc. These products are protected by patents and patents pending. Unauthorized use or reproduction of illustrations, photographs or text is prohibited. Bartco Lighting reserves the right to discontinue products or to change the technical and/or design specifications at any time.
```

- 4" -----

-

2-1/8" wide LED luminaire with drop lens



ORDERING CODE	DESCRIPTION	SPECIFICATIONS
S2A	Occupancy sensor – position 2, 100% – 0%	Sensor located on the side at the <b>right</b> end, with 100% – 0% light output setting
S2B	Occupancy sensor – position 2, 100% – 50%	Sensor located on the side at the <b>right</b> end, with 100% – 50% light output setting
S3A	Occupancy sensor – position 3, 100% – 0%	Sensor located on the side at the <b>left</b> end, with 100% – 0% light output setting
		light output setting
S3B	Occupancy sensor – position 3, 100% – 50%	Sensor located on the side at the <b>left</b> end, with 100% – 50% light output setting
S3B	Occupancy sensor – position 3, 100% – 50% Sensor - left end	Sensor located on the side at the <b>left</b> end, with 100% – 50% light output setting

MOUNTING	ORDERING CODE	DESCRIPTION
ýý	SM	SURFACE MOUNT Use appropriate fastener through Ø3/16" holes in housing
	WD	<ul> <li>WALL MOUNT - DIRECT ORIENTATION</li> <li>Mounting option includes:</li> <li>1-7/8" H x 2-1/2" W aluminum bracket projects the fixture housing 3/4" from the wall surface</li> </ul>
C4 = 48" nom. C8 = 96" nom.	C4 and C8	CABLE MOUNT Mounting option includes: • Ø 1/16"x 48" (C4) or 96" (C8) aircraft cables • 60" (C4) or 108" (C8) power cable (in coordinating finish) • Bracket bars • Ø 5" white canopies • Ceiling couplers • Side exit cable grippers

2-1/8" wide LED luminaire with drop lens

# bartco

LENGTH / M	OUNTING DIMEN	VSIONS	
	1		
ORDERING			


CODE	LENGTH A*	LENGTH B*	LENGTH C*	LENGTH D*	LENGTH E*
2	22-3/4″	22-1/2″	22-1/4″	16-3/4″	19-1/2″
3	33-3/4″	33-1/2″	33-1/4″	27-3/4″	30-1/2″
4	44-3/4″	44-1/2″	44-1/4″	38-3/4″	41-1/2″
5	55-3/4″	55-1/2″	55-1/4″	49-3/4″	52-1/2″
6	66-3/4″	66-1/2″	66-1/4″	60-3/4″	63-1/2″
7	77-3/4″	77-1/2″	77-1/4″	71-3/4″	74-1/2″
8	88-3/4″	88-1/2″	88-1/4″	82-3/4″	85-1/2″

ORDERING CODE	DESCRIPTION
SN	Single
ST	Starter
AD	Adder
TR	Terminator


\* Add 4" to dimension for any fixture using the S1, S2 or S3 occupancy sensor option

#### RUN INFORMATION


Back Plan - Surface Mount Single Fixture Option

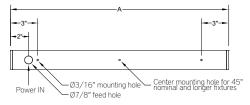

Side View - Surface Mount Single Fixture Option



Back Plan - Surface Mount Continuous Run Option

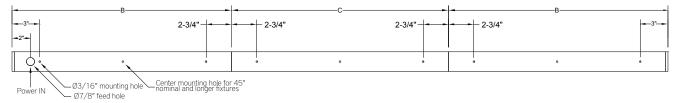

Side View - Surface Mount Continuous Run Option


ST	AD	TR

2-1/8" wide LED luminaire with drop lens


RUN INFORMATION




Plan - Wall Mount Single Fixture Option

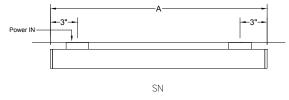

Plan - Wall Mount Continuous Run Option

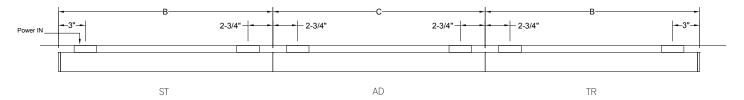


Side View- Cable Mount Single Fixture Option



SN

Side View - Cable Mount Continuous Run Option

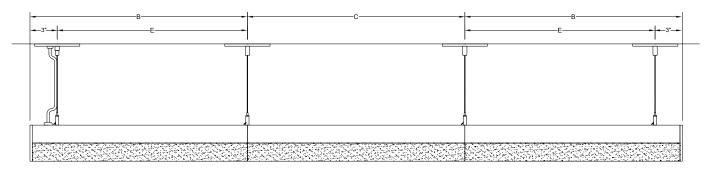

ST

AD

TR