


Type:

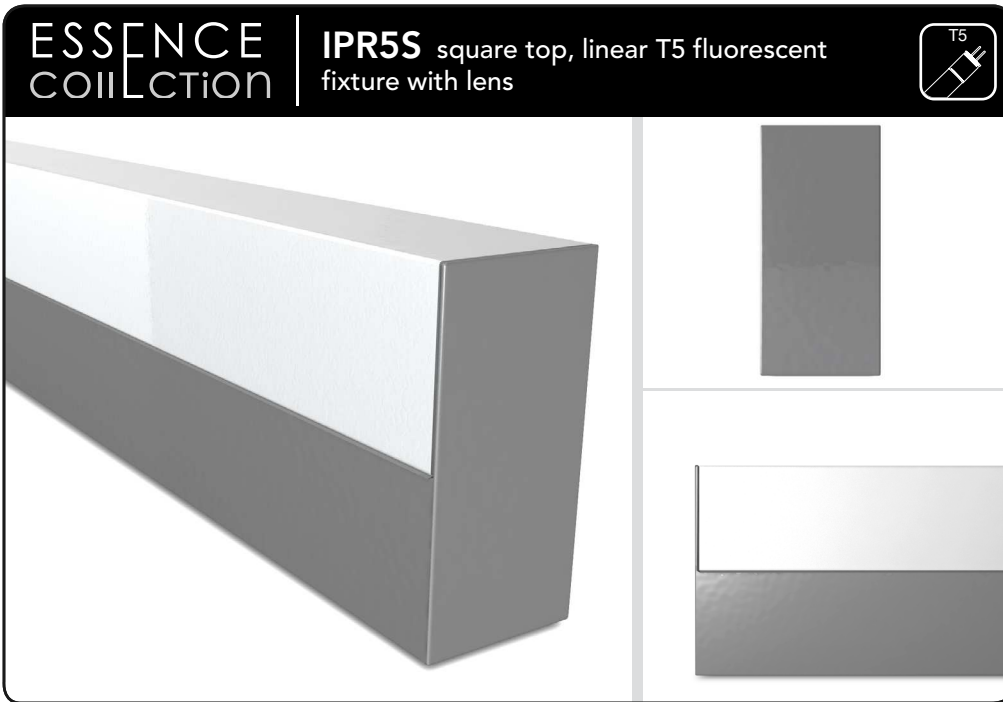

- Fully assembled housing is formed and welded, 20 ga. steel, chemically treated to resist corrosion and enhance paint adhesion
- Model variations offered for surface, cable suspended and pendant mount applications
- Available in standard white, black, silver, platinum, bronze and primer powder coat, applied post production (consult factory for custom finishes)
- Includes frosted or linear prismatic acrylic lens
- Available for T5 14W, 21W, 28W, 35W linear fluorescent lamps in single and some tandem lengths
- Standard ballast is specification grade 120V-277V program start (consult factory for other voltage options)
- Dimming, emergency battery backup and specialized ballast factor options available (consult factory for availability and system compatibility)
- Knock-outs on back accept standard electrical fittings by others (consult factory for other locations)
- Rotational locking lamp holders
- UL and C-UL listed for dry and damp locations
- IBEW manufactured and labeled
- Made in the U.S.A.

**IPR55 +**

 <b>Watts</b>  <b>Section 1</b>	+	 <b>Voltage</b>  <b>Section 2</b>	+	 <b>Ballast</b>  <b>Section 3*</b>	+	 <b>Lens</b>  <b>Section 4</b>	+	 <b>Mount</b>  <b>Section 5</b>	+	 <b>Finish</b>  <b>Section 6</b>	
<ul style="list-style-type: none"> <li>14W: 22-1/2"</li> <li>21W: 34-5/16"</li> <li>28W: 46-1/16"</li> <li>35W: 57-15/16"</li> <li>24W HO: 22-1/2"</li> <li>39W HO: 34-5/16"</li> <li>54W HO: 46-1/16"</li> <li>2 x 21W: 68-5/8"</li> <li>2 x 28W: 92-1/8"</li> </ul>		<ul style="list-style-type: none"> <li>U: 120V-277V</li> <li>347: 347V</li> <li>CF: consult factory for specialize voltage</li> </ul>		<ul style="list-style-type: none"> <li><b>[Non-Dimming]</b></li> <li>PR: program rapid start</li> <li><b>[Dimming]</b></li> <li>MKX: Advance Mark 10</li> <li>VII: Advance Mark 7</li> <li>H300: Lutron Hi-Lume 3D</li> <li>ESYS: Lutron EcoSystem</li> <li>EHD: Lutron EcoSystem H</li> <li>DALI: Dali T5</li> </ul>		<ul style="list-style-type: none"> <li><b>[Emergency]</b></li> <li>I28: Iota ISL-28</li> <li>IS4: Iota ISL-54</li> <li>IS40: Iota ISL-540-35W</li> <li>L28: Iota ISL-28</li> <li>L50: Bodine LP500</li> <li>L55: Bodine LP5500</li> <li>L60: Bodine LP600</li> <li>L60S: Bodine LP600STU</li> </ul>		<ul style="list-style-type: none"> <li>F: frosted</li> <li>P: linear prismatic</li> </ul>		<ul style="list-style-type: none"> <li>SM: surface mount</li> <li>CM48: cable mount 48" cable length</li> <li>CM96: cable mount 96" cable length</li> <li>PM18: pendant mount 18" stem length</li> <li>PM24: pendant mount 24" stem length</li> <li>PM30: pendant mount 30" stem length</li> <li>CF: consult factory for custom length</li> <li>SRM: semi-recessed mount</li> </ul>	<ul style="list-style-type: none"> <li>WH: white</li> <li>BL: black</li> <li>SL: silver</li> <li>PT: platinum**</li> <li>BZ: bronze</li> <li>PR: primer</li> <li>CF: consult factory for custom color</li> </ul>

\*Not all ballasts work with all lamps. Consult factory for details.  
\*\* A standard finish requiring a two step coating process, premium will apply.

