


Type:

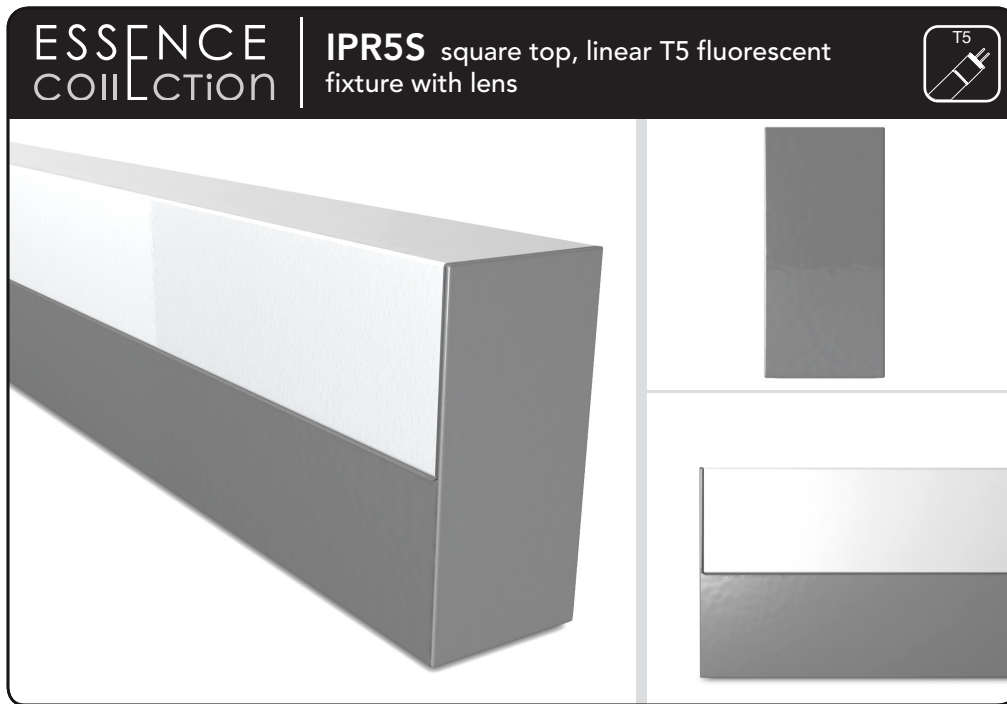

- Fully assembled housing is formed and welded, 20 ga. steel, chemically treated to resist corrosion and enhance paint adhesion
- Model variations offered for surface, cable suspended and pendant mount applications
- Available in standard white, black, silver, platinum, bronze and primer powder coat, applied post production (consult factory for custom finishes)
- Includes frosted or linear prismatic acrylic lens
- Available for T5 14W, 21W, 28W, 35W linear fluorescent lamps in single and some tandem lengths
- Standard ballast is specification grade 120V-277V program start (consult factory for other voltage options)
- Dimming, emergency battery backup and specialized ballast factor options available (consult factory for availability and system compatibility)
- Knock-outs on back accept standard electrical fittings by others (consult factory for other locations)
- Rotational locking lamp holders
- UL and C-UL listed for dry and damp locations
- IBEW manufactured and labeled
- Made in the U.S.A.

IPR55 +

<p>Watts</p>	<p>Voltage</p>	<p>Ballast</p>	<p>Lens</p>	<p>Mount</p>	<p>Finish</p>		
<p>Section 1</p> <ul style="list-style-type: none"> 14W: 22-1/2" 21W: 34-5/16" 28W: 46-1/16" 35W: 57-15/16" 24W HO: 22-1/2" 39W HO: 34-5/16" 54W HO: 46-1/16" 2 x 21W: 68-5/8" 2 x 28W: 92-1/8" 	<p>Section 2</p> <ul style="list-style-type: none"> U: 120V-277V 347: 347V CF: consult factory for specialize voltage 	<p>Section 3*</p> <table border="0"> <tr> <td style="vertical-align: top;"> <p>[Non-Dimming]</p> <ul style="list-style-type: none"> PRS: program rapid start MKX: Advance Mark 10 VII: Advance Mark 7 H300: Lutron Hi-Lume 3D ESYS: Lutron EcoSystem EHD: Lutron EcoSystem H DALI: Dali T5 PHO: Sylvania Helios TEN: SuperDim </td> <td style="vertical-align: top;"> <p>[Emergency]</p> <ul style="list-style-type: none"> I28: Iota ISL-28 IS4: Iota ISL-54 IS40: Iota ISL-540-35W L28: Iota ISL-28 L50: Bodine LP500 L55: Bodine LP5500 L60: Bodine LP600 L60S: Bodine LP600STU </td> </tr> </table>	<p>[Non-Dimming]</p> <ul style="list-style-type: none"> PRS: program rapid start MKX: Advance Mark 10 VII: Advance Mark 7 H300: Lutron Hi-Lume 3D ESYS: Lutron EcoSystem EHD: Lutron EcoSystem H DALI: Dali T5 PHO: Sylvania Helios TEN: SuperDim 	<p>[Emergency]</p> <ul style="list-style-type: none"> I28: Iota ISL-28 IS4: Iota ISL-54 IS40: Iota ISL-540-35W L28: Iota ISL-28 L50: Bodine LP500 L55: Bodine LP5500 L60: Bodine LP600 L60S: Bodine LP600STU 	<p>Section 4</p> <ul style="list-style-type: none"> F: frosted P: linear prismatic 	<p>Section 5</p> <ul style="list-style-type: none"> SM: surface mount CM48: cable mount 48" cable length CM96: cable mount 96" cable length PM18: pendant mount 18" stem length PM24: pendant mount 24" stem length PM30: pendant mount 30" stem length CF: consult factory for custom length SRM: semi-recessed mount 	<p>Section 6</p> <ul style="list-style-type: none"> WH: white BL: black SL: silver PT: platinum BZ: bronze PR: primer CF: consult factory for custom color
<p>[Non-Dimming]</p> <ul style="list-style-type: none"> PRS: program rapid start MKX: Advance Mark 10 VII: Advance Mark 7 H300: Lutron Hi-Lume 3D ESYS: Lutron EcoSystem EHD: Lutron EcoSystem H DALI: Dali T5 PHO: Sylvania Helios TEN: SuperDim 	<p>[Emergency]</p> <ul style="list-style-type: none"> I28: Iota ISL-28 IS4: Iota ISL-54 IS40: Iota ISL-540-35W L28: Iota ISL-28 L50: Bodine LP500 L55: Bodine LP5500 L60: Bodine LP600 L60S: Bodine LP600STU 						

*Not all ballasts work with all lamps. Consult factory for details.

