


Ballast Housing |

Aluminum standard housing with cover plate included : for ballast mounting in architectural or concealed applications

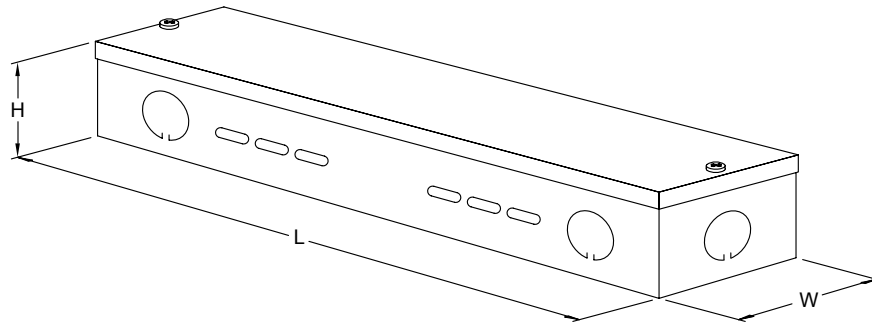

ENCLOSURE STYLE 1	L = 15-1/8"	W = 3-1/8"	H = 1-7/8"
ENCLOSURE STYLE 2	L = 23-1/8"	W = 3-1/8"	H = 1-7/8"

Alternate ballast housings are available. (Consult factory for other options)

model no.	description
T5 REMOTE BALLAST	With surface mount enclosure for BFL270, BFL270-S, BFL272, BFL272-S, BDS510 T5 fixtures

Note: Catalog number includes program rapid start ballast except for 8W and 13W models which include an instant start ballast. Consult factory for three and four lamp ballast options.

T5 STANDARD OUTPUT	Lamp Operation	Enclosure Style
BFB508-1/120	8W T5	1
/277		1
BFB508-2/120	2 x 8W T5	1
/277		1
BFB513-1/120	13W T5	1
/277		1
BFB513-2/120	2 x 13W T5	1
/277		1
BFB514-1/UNV/RS	14W T5	2
BFB514-2/UNV/RS	2 x 14W T5	2
BFB521-1/UNV/RS	21W T5	2
BFB521-2/UNV/RS	2 x 21W T5	2
BFB528-1/UNV/RS	28W T5	2
BFB528-2/UNV/RS	2 x 28W T5	2
BFB535-1/UNV/RS	35W T5	2
BFB535-2/UNV/RS	2 x 35W T5	2

model no.	description	
T5 HIGH OUTPUT	Lamp Operation	Enclosure Style
BFB524HO-1/UNV/RS	24W T5 HO	2
BFB524HO-2/UNV/RS	2 x 24W T5 HO	2
BFB539HO-1/UNV/RS	39W T5 HO	2
BFB539HO-2/UNV/RS	2 x 39W T5 HO	2
BFB554HO-1/UNV/RS	54W T5 HO	2
BFB554HO-2/UNV/RS	2 x 54W T5 HO	2
BFB580HO-1/UNV/RS	80W T5 HO	2
BFB580HO-2/UNV/RS	2 x 80W T5 HO	2

OPTIONS | T5 REMOTE BALLAST

/CU

Custom powder coat finish

T5 REMOTE DIMMING | Listed by manufacturer

Note: Customer responsible for compatibility between dimming ballast and control system. Note remote distance limitations.

Lamp coverage by a specific manufacturer subject to change without notice. Consult factory for availability of models by manufacturers not listed below.

	Lamp Operation	Enclosure Style
LUTRON ECOSYSTEM Dims to 10% 3-wire line voltage phase control Remote distance = 7' to the farthest lamp holder (deduct fixture length to determine net distance to the ballast enclosure)		
BFB514-1/120ESYS	14W T5	2
BFB514-1/277ESYS	14W T5	2
BFB514-2/120ESYS	2 x 14W T5	2
BFB514-2/277ESYS	2 x 14W T5	2
BFB521-1/120ESYS	21W T5	2
BFB521-1/277ESYS	21W T5	2
BFB521-2/120ESYS	2 x 21W T5	2
BFB521-2/277ESYS	2 x 21W T5	2
BFB528-1/120ESYS	28W T5	2
BFB528-1/277ESYS	28W T5	2
BFB528-2/120ESYS	2 x 28W T5	2
BFB528-2/277ESYS	2 x 28W T5	2
BFB524-1/120ESYS	24W T5 HO	2
BFB524-1/277ESYS	24W T5 HO	2
BFB524-2/120ESYS	2 x 24W T5 HO	2
BFB524-2/277ESYS	2 x 24W T5 HO	2
BFB539-1/120ESYS	39W T5 HO	2
BFB539-1/277ESYS	39W T5 HO	2
BFB539-2/120ESYS	2 x 39W T5 HO	2
BFB539-2/277ESYS	2 x 39W T5 HO	2

model no.	description	
	Lamp Operation	Enclosure Style
BFB554-1/120ESYS	54W T5 HO	2
BFB554-1/277ESYS	54W T5 HO	2
BFB554-2/120ESYS	2 x 54W T5 HO	2
BFB554-2/277ESYS	2 x 54W T5 HO	2
LUTRON ECOSYSTEM Dims to 10% 2-wire digital and 3-wire line voltage phase control Remote distance = 7' to the farthest lamp holder (deduct fixture length to determine net distance to the ballast enclosure)		
BFB514-1/UNVESYS	14W T5	2
BFB514-2/UNVESYS	2 x 14W T5	2
BFB521-1/UNVESYS	21W T5	2
BFB521-2/UNVESYS	2 x 21W T5	2
BFB528-1/UNVESYS	28W T5	2
BFB528-2/UNVESYS	2 x 28W T5	2
BFB535-1/UNVESYS	35W T5	2
BFB535-2/UNVESYS	2 x 35W T5	2
BFB524-1/UNVESYS	24W T5 HO	2
BFB524-2/UNVESYS	2 x 24W T5 HO	2
BFB539-1/UNVESYS	39W T5 HO	2
BFB539-2/UNVESYS	2 x 39W T5 HO	2
BFB554-1/UNVESYS	54W T5 HO	2
BFB554-2/UNVESYS	2 x 54W T5 HO	2
LUTRON HI-LUME-3D Dims to 1% 2-wire digital and 3-wire line voltage phase control Remote distance = 7' to the farthest lamp holder (deduct fixture length to determine net distance to the ballast enclosure)		
BFB514-1/UNV300	24W T5 HO	2
BFB514-2/UNV300	24W T5 HO	2
BFB521-1/UNV300	2 x 24W T5 HO	2
BFB521-2/UNV300	2 x 24W T5 HO	2
BFB528-1/UNV300	39W T5 HO	2
BFB528-2/UNV300	39W T5 HO	2
BFB524-1/UNV300	2 x 39W T5 HO	2
BFB524-2/UNV300	2 x 39W T5 HO	2
BFB539-1/UNV300	54W T5 HO	2
BFB539-2/UNV300	54W T5 HO	2
BFB554-1/UNV300	2 x 54W T5 HO	2
BFB554-2/UNV300	2 x 54W T5 HO	2
OPTIONS T5 REMOTE DIMMING		
/CU	Custom powder coat finish	