


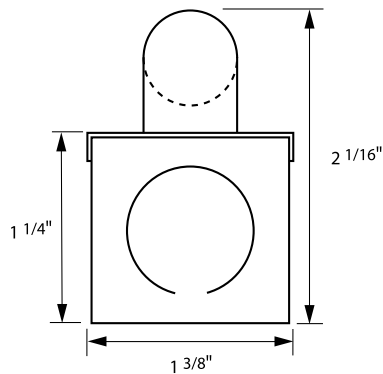

BFL281

type:

LINEAR T5 FLUORESCENT

low profile T5 fluorescent fixture

- SPECIFICATIONS |**
- Fully assembled housing is formed and welded, 20 ga. steel, chemically treated to resist corrosion and enhance paint adhesion
 - Standard finish is high reflectance white powder coat, applied post production
 - Knock-outs accept standard electrical fittings (by others)
 - Rotational locking lamp holders
 - Available for T5 6W, 8W, 13W, 14W, 21W, 28W, 35W and high output 24W, 39W, 54W, 80W linear fluorescent lamps
 - Standard 120V, 277V or Universal electronic high power factor ballast is pre-wired to the lamp holders
 - Dimming ballast options available (consult factory for availability and system compatibility)
 - UL and ULC listed for dry and damp locations
 - IBEW

NOTE: Includes program rapid start ballast except for 8W and 13W models which includes an instant start ballast.

SPECIFICATION / ORDER FORMAT				DIMENSIONAL INFO.	
model no.	voltage	wiring method	options	lamp	overall length
BFL281-6	/120		Dimming - (consult factory)	6w T5	9-3/16"
BFL281-8	/277		/DL - damp location	8w T5	12-13/16"
BFL281-13	/UNV	/RS	/CU - custom finish (consult factory)	13w T5	21-1/4"
BFL281-14			/ALUM - aluminum body	14w T5	22-1/2"
BFL281-21				21w T5	34-1/4"
BFL281-28				28w T5	46-1/16"
BFL281-35				35w T5	57-15/16"
BFL281-24				24w T5 HO	22-1/2"
BFL281-39				39w T5 HO	34-1/4"
BFL281-54				54w T5 HO	46-1/16"
BFL281-80				80w T5 HO	57-15/16"

LENSES | Two-piece system comprised of polycarbonate channel and striated snap-on cover

U5LNP

Clear fine prismatic acrylic lens with mounting clips (sold by the foot) ____ft.

U5LNCF

Frosted acrylic lens with mounting clips (sold by the foot) ____ft.

TUBE GUARD |

TG

Tube Guard (sold by the foot) ____ft.

WIRE GUARD |

WG

Wire Guard

CABLE KIT |

BAC-4N-W

Aircraft suspension kit, 4', white

BAC-4P-W


Aircraft suspension kit w/ power feed, 4', white

*custom fixture layout required, consult factory

MOUNTING CLIP | (consult factory for portable luminaire applications)

MC281

Fixture mounting clip

NOTE: Two to three required per fixture**REFLECTORS** | 20 ga. steel construction, white powder coat finish (consult factory for optional reflector materials and finishes)

R1

SYMMETRICAL

281-R1-6

281-R1-8

281-R1-13

281-R1-14/24

281-R1-21/39

281-R1-28/54

281-R1-35/80

for fixture models

BFL281-6

BFL281-8

BFL281-13

BFL281-14

BFL281-24

BFL281-21

BFL281-39

BFL281-28

BFL281-54

BFL281-35

BFL281-80

ASYMMETRICAL

281-R2-6

281-R2-8

281-R2-13

281-R2-14/24

281-R2-21/39

281-R2-28/54

281-R2-35/80

BFL281-6

BFL281-8

BFL281-13

BFL281-14

BFL281-24

BFL281-21


BFL281-39

BFL281-28

BFL281-54

BFL281-35

BFL281-80



R2

INSIDE ASYMMETRICAL

281-R3-6

281-R3-8

281-R3-13

281-R3-14/24

281-R3-21/39

281-R3-28/54

281-R3-35/80

BFL281-6

BFL281-8

BFL281-13

BFL281-14

BFL281-24

BFL281-21


BFL281-39

BFL281-28

BFL281-54

BFL281-35

BFL281-80



R3

ELLIPTICAL

281-RE-6

281-RE-8

281-RE-13

281-RE-14/24

281-RE-21/39

281-RE-28/54

281-RE-35/80

BFL281-6

BFL281-8

BFL281-13

BFL281-14

BFL281-24

BFL281-21

BFL281-39

BFL281-28

BFL281-54

BFL281-35

BFL281-80



RE