

- Fully assembled housing is formed and welded, 20 ga. steel, chemically treated to resist corrosion and enhance paint adhesion
- Model variations offered for surface, cable suspended and pendant mount applications
- Available in standard white, black, silver, platinum, bronze and primer powder coat, applied post production (consult factory for custom finishes)
- Includes frosted or linear prismatic acrylic lens
- Available for T5 14W, 21W, 28W, 35W and high output 24W, 39W, 54W, 80W linear fluorescent lamps in single and some tandem lengths
- Standard ballast is specification grade 120V-277V program start (consult factory for other voltage options)
- Dimming, emergency battery backup and specialized ballast factor options available (consult factory for availability and system compatibility)
- Knock-outs on back accept standard electrical fittings by others (consult factory for other locations)
- Rotational locking lamp holders
- UL and C-UL listed for dry and damp locations
- IBEW manufactured and labeled
- Made in the U.S.A.


Lamps	Watts	Voltage	Ballast	Lens	Mount	Finish
IPR5MS +	+	+	+	+	+	+
Section 1	Section 2	Section 3	Section 4*	Section 5	Section 6	Section 7
1: single lamp 2: double lamp	14W: 22-1/2" 21W: 34-5/16" 28W: 46-1/16" 35W: 57-15/16" 2121W: 68-5/8" 2828W: 92-1/8" 24W: 22-1/2" 39W: 34-5/16" 54W: 46-1/16" 80W: 57-15/16" 3939W: 68-5/8" 5454W: 92-1/8"	U: 120V-277V CF: consult factory for specialize voltage	<b>[Non-Dimming]</b> PRS: program rapid start <b>[Dimming]</b> MKK: Advance Mark 10 VLI: Advance Mark 7 H300: Lutron Hi-Lume 3D ESYS: Lutron EcoSystem EHD: Lutron EcoSystem H DALI: Dali T5 SD95-50: Universal BallaSTAR SD115-50: Universal BallaSTAR PSNS: PowerSense <b>[Custom Performance]</b> PH: 1.158F program start PN85: 0.85BF program start PN90: 0.90BF program start PN95: 0.95BF program start PXL51: 0.57BF prgm strt <b>[Emergency]</b> I28: Iota ISL-28 I54: Iota ISL-54 I540: Iota ISL-540-35W L50: Bodine LP500 L55: Bodine LP5500 L60: Bodine LP600 L60S: Bodine LP600STU	F: frosted P: linear prismatic	SM: surface mount (for 2 lamp HO, consult factory) CM48: cable mount 48" cable length CM96: cable mount 96" cable length PM18: pendant mount 18" stem length PM24: pendant mount 24" stem length PM30: pendant mount 30" stem length CF: consult factory for custom length	WH: white BL: black SL: silver PT: platinum*** BZ: bronze PR: primer CF: consult factory for custom color

\*Not all ballasts work with all lamps. Consult factory for details.


\*\*Pendant and Cable mount ONLY for 2 lamp HO applications. Consult factory for Surface Mount option.

\*\*\* A standard finish requiring a two step coating process, premium will apply.

#### Profile

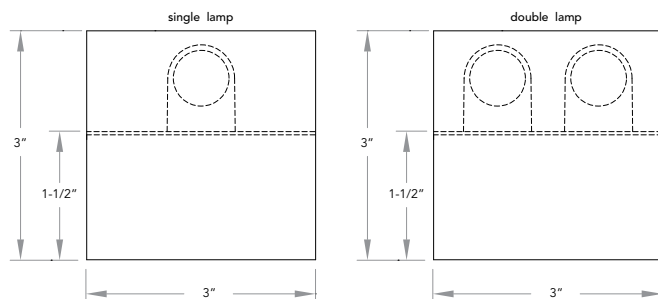

#### Top View



#### Side View

