


Type:

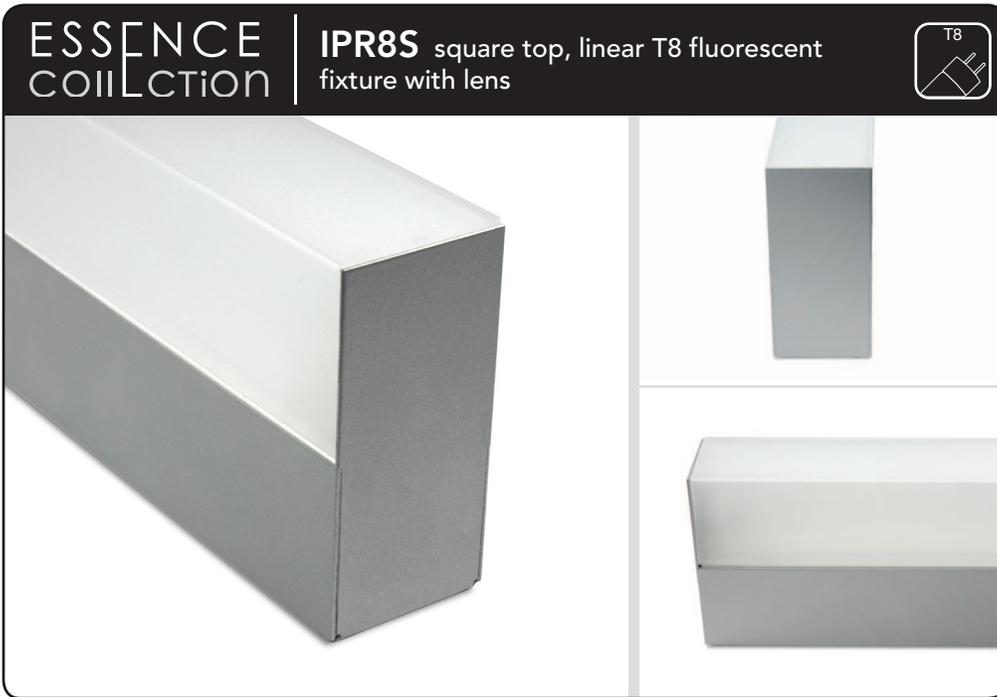

- Fully assembled housing is formed and welded, 20 ga. steel, chemically treated to resist corrosion and enhance paint adhesion
- Model variations offered for surface, cable suspended and pendant mount applications
- Available in standard white, black, silver, platinum, bronze and primer powder coat, applied post production (consult factory for custom finishes)
- Includes frosted or linear prismatic acrylic lens
- Available for T8 17W, 25W, 32W, and 40W linear fluorescent lamps in single and some tandem lengths
- Standard ballast is specification grade 120V-277V program start (consult factory for other voltage options)
- Dimming, emergency battery backup and specialized ballast factor options available (consult factory for availability and system compatibility)
- Knock-outs on back accept standard electrical fittings by others (consult factory for other locations)
- Rotational locking lamp holders
- UL and C-UL listed for dry and damp locations
- IBEW manufactured and labeled
- Made in the U.S.A.

IPR8S +

 Watts Section 1 <ul style="list-style-type: none"> — 17W: 2' nom. — 25W: 3' nom. — 32W: 4' nom. — 40W: 5' nom. — 2525W: 6' nom. — 3232W: 8' nom. 	 Voltage Section 2 <ul style="list-style-type: none"> — U: 120V-277V — 347: 347V — CF: consult factory for specialized voltage 	 Ballast Section 3* <table border="0"> <tr> <td style="vertical-align: top;"> [Non-Dimming] <ul style="list-style-type: none"> — IS: instant start — H300: Lutron Hi-Lume 3D — H317: Lutron Hi-Lume 3D — ESYS: Lutron EcoSystem — EHD: Lutron EcoSystem H — DALI: Dali T8 </td> <td style="vertical-align: top;"> [Emergency] <ul style="list-style-type: none"> — I28: Iota ISL-28 — I54: Iota ISL-54 — I540: Iota ISL-540 — L50: Bodine LP500 — L55: Bodine LP550 — L60: Bodine LP600 — L60S: Bodine LP600STU — LB51: Bodine B50LP </td> </tr> </table>	[Non-Dimming] <ul style="list-style-type: none"> — IS: instant start — H300: Lutron Hi-Lume 3D — H317: Lutron Hi-Lume 3D — ESYS: Lutron EcoSystem — EHD: Lutron EcoSystem H — DALI: Dali T8 	[Emergency] <ul style="list-style-type: none"> — I28: Iota ISL-28 — I54: Iota ISL-54 — I540: Iota ISL-540 — L50: Bodine LP500 — L55: Bodine LP550 — L60: Bodine LP600 — L60S: Bodine LP600STU — LB51: Bodine B50LP 	 Lens Section 4 <ul style="list-style-type: none"> — F: frosted — P: linear prismatic 	 Mount Section 5 <ul style="list-style-type: none"> — SM: surface mount — CM48: cable mount 48" cable length — CM96: cable mount 96" cable length — PM18: pendant mount 18" stem length — PM24: pendant mount 24" stem length — PM30: pendant mount 30" stem length — CF: consult factory for custom length 	 Finish Section 6 <ul style="list-style-type: none"> — WH: white — BL: black — SL: silver — PT: platinum — BZ: bronze — PR: primer — CF: consult factory for custom color
[Non-Dimming] <ul style="list-style-type: none"> — IS: instant start — H300: Lutron Hi-Lume 3D — H317: Lutron Hi-Lume 3D — ESYS: Lutron EcoSystem — EHD: Lutron EcoSystem H — DALI: Dali T8 	[Emergency] <ul style="list-style-type: none"> — I28: Iota ISL-28 — I54: Iota ISL-54 — I540: Iota ISL-540 — L50: Bodine LP500 — L55: Bodine LP550 — L60: Bodine LP600 — L60S: Bodine LP600STU — LB51: Bodine B50LP 						

*Not all ballasts work with all lamps. Consult factory for details.

