


BSS210 | GENERAL INFORMATION

Rectilinear LED fixture with drop down frosted lens

Project: _____ Type: _____

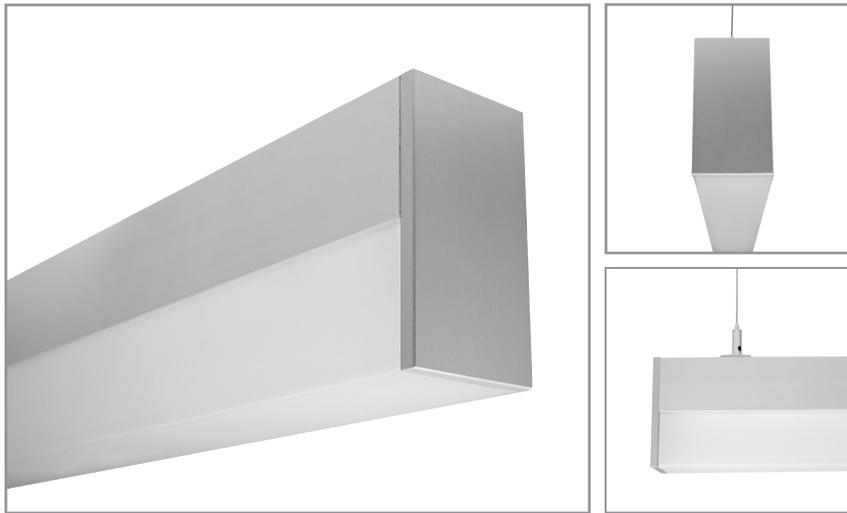

FEATURES

The BSS210 is a linear LED luminaire for general illumination applications. The 2-1/8" wide extruded aluminum housing is capped by a 2" tall, frosted, three sided lens that produces a wide distribution of diffuse illumination. 1/4" thick machined aluminum ends caps finish off the fixture ends.

SPECIFICATIONS

Fixture constructed of an extruded aluminum housing, frosted, extruded acrylic lens and machined aluminum end caps.

Model variations offered for surface and cable suspended applications

Cable hangers can be located at any location along the fixture length

Standard finishes include satin anodize, or Fluoroscope White (semi-matte), white (semi-gloss), black, silver, platinum, bronze and primer powder coat, applied post production (consult factory for custom finishes)

Available in nominal 23"-89" single fixtures and continuous runs

Continuous run fixtures include power quick connects for simple, efficient wiring

Standard driver offered with 0-10V dimming or non-dim

Other dimming driver options available (refer to supplemental driver details sheet for availability)

Remote mounted emergency battery backup available (ordered separately, consult factory for details)

LEDs available in 3000K, 3500K, 4000K, 5000K, all with a typical 84-85 CRI and color consistency within a 3 step MacAdam ellipse

Lamp life rated at 50,000 hours


Limited three year warranty

UL and C-UL listed for dry and damp locations

IBEW manufactured and assembled

Made in U.S.A.


SECTION



PLAN



SIDE



BSS210 +

	+		+		+		+		+			
NOMINAL FIXTURE LENGTH		COLOR TEMPERATURE		DRIVER		LUMEN OUTPUT		MOUNT		RUN CONFIGURATION		FINISH
23: 22-9/16"		30: 3000K - 84 CRI		[Non-Dimming]		1: standard		SM: surface mount		SIN: single		SA: satin anodize
34: 33-9/16"		35: 3500K - 85 CRI		leave blank for non-dimming		2: high		CM48: cable mount 48" cable length		STA: starter		FW: Fluoroscope white (semi-matte)
45: 44-9/16"		40: 4000K - 85 CRI		[Dimming]		CF: consult factory for custom output		CM96: cable mount 96" cable length		ADD: adder		WH: white (semi-gloss)
56: 55-9/16"		50: 5000K - 85 CRI		DIM: Advance 0-10V				CF: consult factory for custom mounting		TER: terminator		BL: black
67: 66-9/16"				ESYS: Lutron EcoSystem								SL: silver
78: 77-9/16"				5-Series								PT: platinum*
89: 88-9/16"				HLM: Lutron Hi-lume								BZ: bronze
				A-Series								PR: primer
				SD: Advance Step Dim								CF: consult factory for custom color

* A standard finish requiring a 2 step coating process, premium may apply