


Type:

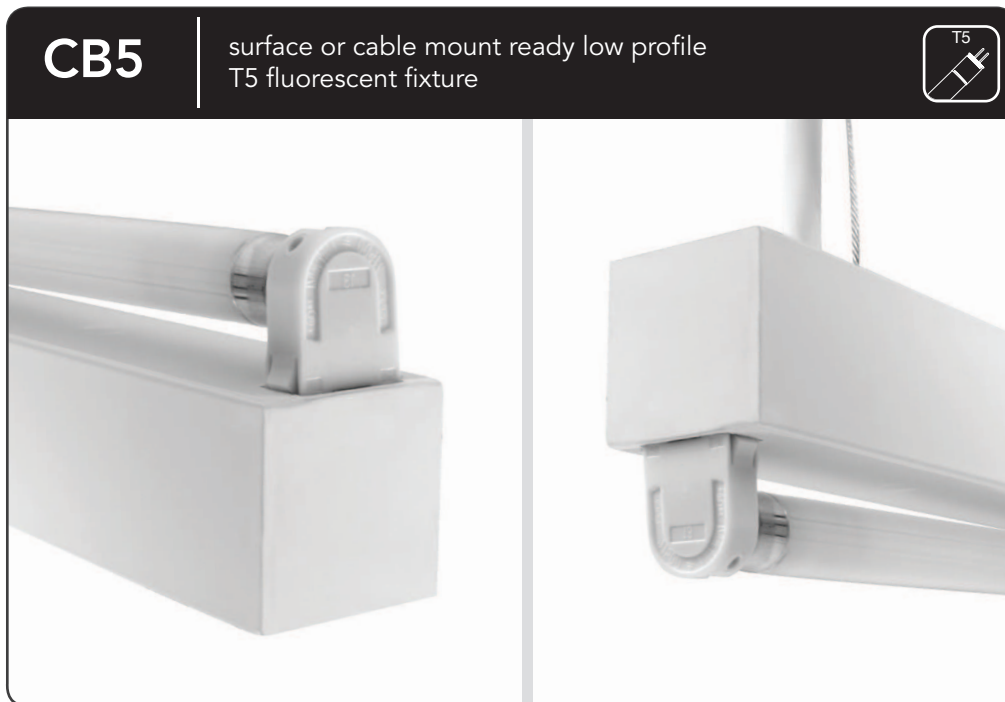

- Fully assembled housing is formed and welded, 20 ga. steel, chemically treated to resist corrosion and enhance paint adhesion
- Available in standard white, black, silver, platinum, bronze and primer powder coat, applied post production (consult factory for custom finishes)
- No visible knockouts
- Rotational locking lamp holders
- Available for one T5 14W, 21W, 28W, 35W and high output 24W, 39W, 54W, 80W linear fluorescent lamps
- Standard universal voltage (120-277V) PRS electronic high power factor ballast is pre-wired to the lamp holders (consult factory for other voltage options)
- For dimming and emergency battery back up options not listed below, consult factory for availability and system compatibility
- UL and ULC listed for dry and damp locations
- IBEW

WATTS	VOLTAGE	BALLAST	MOUNT	FINISH
CB5 + _____ 14W: 22-1/2" 21W: 34-5/16" 28W: 46-1/16" 35W: 57-15/16" 24W: HO - 22-1/2" 39W: HO - 34-5/16" 54W: HO - 46-1/16" 80W: HO - 57-15/16"	_____ U: 120V-277V	_____ [Non-Dimming] PRS: program rapid start [Dimming] MKX: Advance Mark 10 VII: Advance Mark 7 H300: Lutron Hi-Lume 3D ESYS: Lutron EcoSystem ECO: Lutron Eco-10 EHD: Lutron EcoSystem H DALI: Dali T5 PHO: Sylvania Helios SD95-50: Universal BallaSTAR SD115-50: Universal BallaSTAR	_____ SM: surface mount CM: cable mount PM: pendant mount CF: consult factory for custom length	_____ WH: white BL: black SL: silver PT: platinum BZ: bronze PR: primer CF: consult factory for custom color

*Not all ballasts work with all lamps. Consult factory for details.

