

Type:



- Fully assembled housing is formed and welded, 20 ga. steel, chemically treated to resist corrosion and enhance paint adhesion
- Model variations offered for surface, cable suspended and pendant mount applications
- Available in standard white, black, silver, platinum, bronze and primer powder coat, applied post production (consult factory for custom finishes)
- Includes frosted or linear prismatic acrylic lens
- Includes passive infrared occupancy sensor
- Available for one or two T5 14W, 21W, 28W, 35W and high output 24W, 39W, 54W, 80W linear fluorescent lamps in single and some tandem lengths
- Standard ballast is specification grade 120V-277V program start (consult factory for other voltage options)
- Dimming, emergency battery backup and specialized ballast factor options available (consult factory for availability and system compatibility)
- Knock-outs on back accept standard electrical fittings by others (consult factory for other locations)
- Rotational locking lamp holders
- UL and C-UL listed for dry and damp locations
- IBEW manufactured and labeled
- Made in the U.S.A.

LAMPS WATTS VOLTAGE BALLAST LENS MOUNT FINISH


IPR5MS-OCC + _____ + _____ + _____ + _____ + _____ + _____ + _____

- 1: single lamp
2: double lamp
- 14W: 26-1/2"
21W: 38-5/16"
28W: 50-1/16"
35W: 61-15/16"
2121W: 72-5/8"
2828W: 96-1/8"
- U: 120V-277V
347: 347V
CF: consult factory for specialize voltage
- [Non-Dimming]**
PRS: program rapid start
[Dimming]
VII: Advance Mark 7
PSNS: PowerSense
TEN: SuperDim
- [Custom Performance]**
PH: 1.15BF program start
PN85: 0.85BF program start
PN90: 0.90BF program start
PN95: 0.95BF program start
PXL51: 0.57BF prgm str
- [Emergency]**
I28: Iota ISL-28
I54: Iota ISL-54
I540: Iota ISL-540-35W
L28: Iota ISL-28
L50: Bodine LP500
L55: Bodine LP5500
L60: Bodine LP600
L60S: Bodine LP600STU
- F: frosted
P: linear prismatic
- SMC: surface mount ceiling
SMW: surface mount wall
CM48: cable mount 48" cable length
CM96: cable mount 96" cable length
PM18: pendant mount 18" stem length
PM24: pendant mount 24" stem length
PM30: pendant mount 30" stem length
CF: consult factory for custom length (for 2 lamp HO, consult factory)
- WH: white
BL: black
SL: silver
PT: platinum
BZ: bronze
PR: primer
CF: consult factory for custom color

**Pendant and Cable mount ONLY for 2 lamp HO applications. Consult factory for Surface Mount option.

*Not all ballasts work with all lamps. Consult factory for details.

Profile

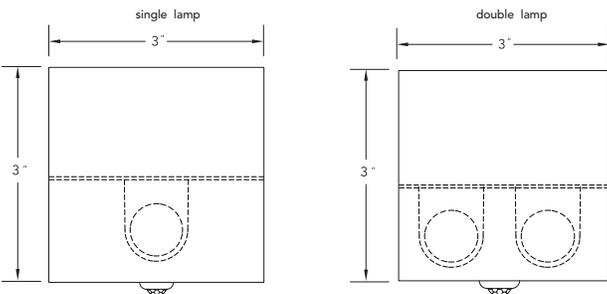

Top View



Side View

