

# PRELIMINARY

## BSS511 | GENERAL INFORMATION



2-1/4" O.D. arm mount LED fixture with frosted lens and remote driver

Project: \_\_\_\_\_ Type: \_\_\_\_\_



### FEATURES

Part of the Tubular family of LED luminaires, the BSS511 is an arm mounted model ideally suited for wall wash and stack lighting. Slender aluminum arms project the Ø2-1/4" extruded aluminum housing from a wall or ceiling. A frosted acrylic lens diffuses the light from high quality diodes, while a generous range of rotation allows for flexible aiming.

### SPECIFICATIONS

Fixture housing constructed of an extruded aluminum tube, frosted acrylic extruded lens and sheet aluminum end caps

Fixture arms are constructed of steel pipe, Ø5/8" extruded aluminum sleeves and machined aluminum end cap couplers.

Includes Ø4-3/4" x 1/8" thick aluminum plates and screws for mounting to 4" octagonal wall boxes (by others)

Standard finishes include satin anodize, or Fluoroscape White (semi-matte), white (semi-gloss), black, silver, platinum\*, bronze and primer powder coat, applied post production (consult factory for custom finishes)

Available in nominal lengths of 13"-69" single fixtures and continuous runs

Arms allow fixture to project from a wall or ceiling nominally 4", 6", 12" or 18"

Fixture housing rotates 332° and is locked in place with hex fastener

Requires a remote driver and enclosure (ordered separately, refer to supplemental driver details sheet for availability)

Fixture wired with 10', 18 ga., low voltage leads

LEDs available in, 3000K, 3500K, 4000K, 5000K, all with a typical 84-85 CRI and color consistency within a 3 step MacAdam ellipse


Lamp life rated at 50,000 hours

Limited three year warranty

UL and C-UL listed for dry and damp locations

IBEW manufactured and assembled

Made in U.S.A.

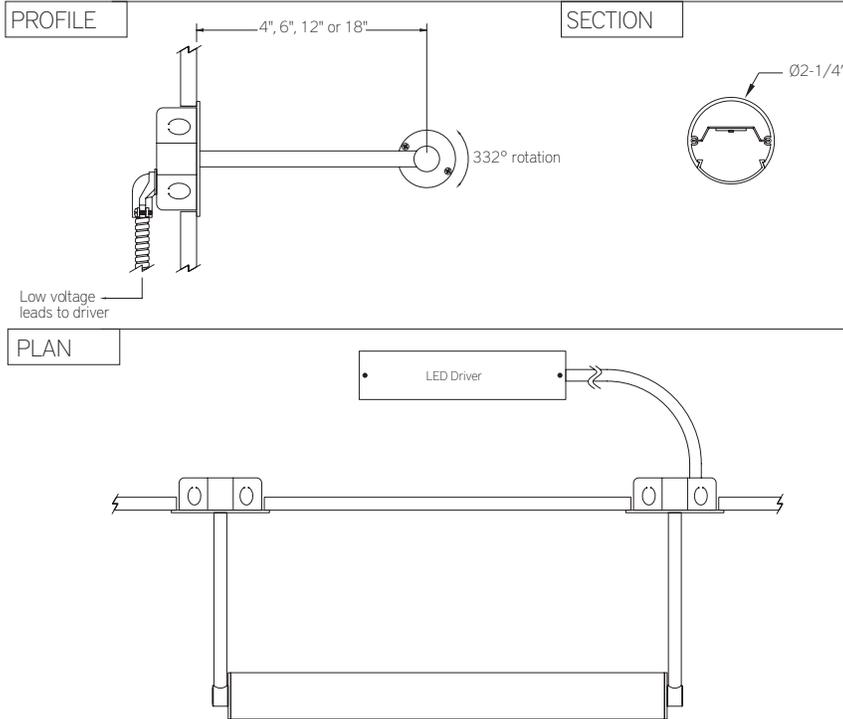

BSS511 +						
	ARM CENTER DISTANCE	COLOR TEMPERATURE	WATTS/FOOT	NOMINAL ARM LENGTH	RUN CONFIGURATION	FINISH
	13: 13-3/16" 24: 24-3/8" 36: 35-9/16" 47: 46-3/4" 58: 57-15/16" 69: 69-1/8"	30: 3000K - 84 CRI 35: 3500K - 85 CRI 40: 4000K - 85 CRI 50: 5000K - 85 CRI	5: 5 W/ft. 7: 7.2 W/ft. 12: 12 W/ft. CF: consult factory for custom wattage	4: 4" 6: 6" 12: 12" 18: 18" CF: consult factory for custom arm length	SIN: single STA: starter ADD: adder TER: terminator	SA: satin anodize FW: Fluoroscape white (semi-matte) WH: white (semi-gloss) BL: black SL: silver PT: platinum* BZ: bronze PR: primer CF: consult factory for custom color

Note: Remote driver ordered separately, refer to supplemental driver details sheet for availability

\* A standard finish requiring a two step coating process - premium will apply