

LENGTH / MOUNTING DIMENSIONS

Note: Recommended dimensions, cables, and hangers are adjustable and can be located at nearly any point along fixture length.

ORDERING CODE	LENGTH A*	LENGTH B*	LENGTH C*	LENGTH D*	LENGTH E*
23	22-3/4"	22-1/2"	22-1/4"	16-3/4"	19-1/2"
34	33-3/4"	33-1/2"	33-1/4"	27-3/4"	30-1/2"
45	44-3/4"	44-1/2"	44-1/4"	38-3/4"	41-1/2"
56	55-3/4"	55-1/2"	55-1/4"	49-3/4"	52-1/2"
67	66-3/4"	66-1/2"	66-1/4"	60-3/4"	63-1/2"
78	77-3/4"	77-1/2"	77-1/4"	71-3/4"	74-1/2"
89	88-3/4"	88-1/2"	88-1/4"	82-3/4"	85-1/2"


RUN CONFIGURATION INFORMATION

ORDERING CODE	DESCRIPTION
SN	Single
ST	Starter
AD	Adder
TR	Terminator


* Add 4" to dimension for any fixture using the S1, S2 or S3 occupancy sensor option

RUN INFORMATION


Back Plan - Surface Mount Single Fixture Option

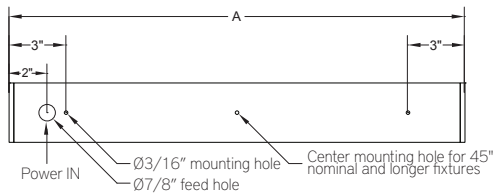


Side View - Surface Mount Single Fixture Option

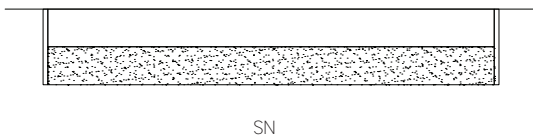

Back Plan - Surface Mount Continuous Run Option

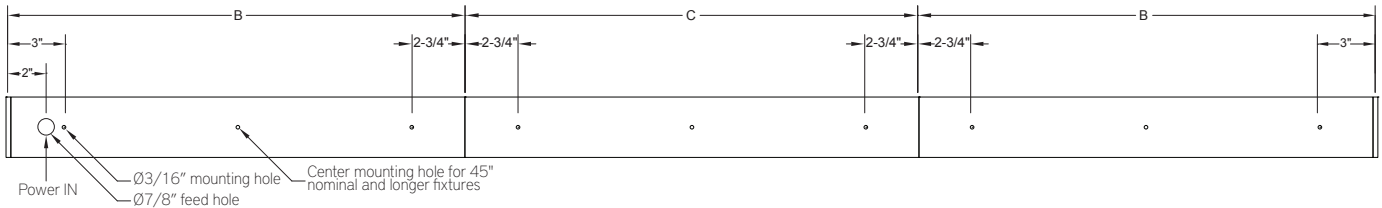


Side View - Surface Mount Continuous Run Option

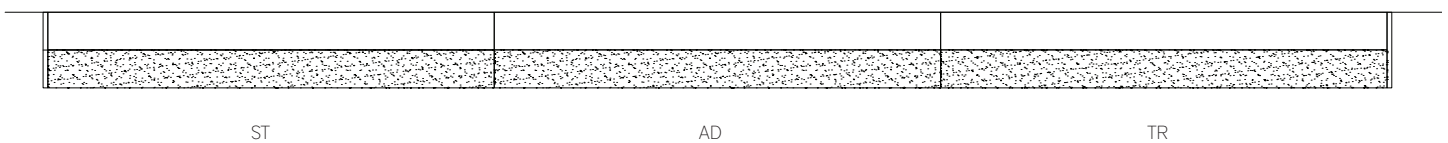


RUN INFORMATION

Side View - Cable Mount Single Fixture Option

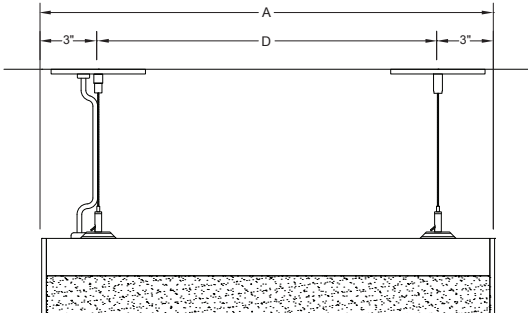

SN

Side View - Cable Mount Continuous Run Option

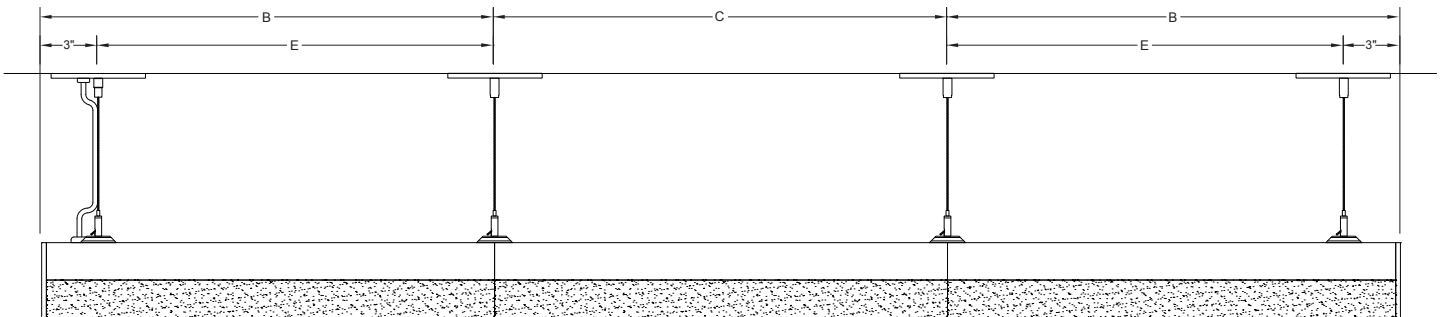

ST

AD

TR