


# BSS215 | bodhi

3-1/8" wide LED luminaire with drop lens

Project: \_\_\_\_\_ Type: \_\_\_\_\_

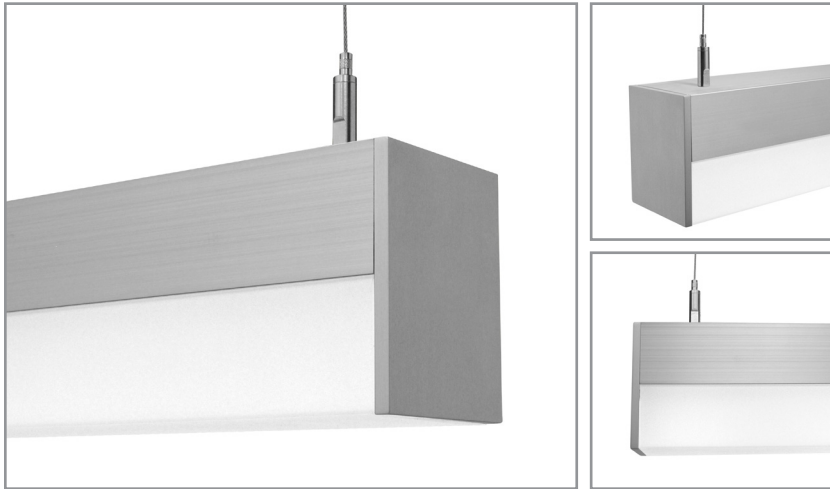

Highlighted fields denote QuickShip Options. See complete 7-Day QuickShip Terms and Conditions available at [www.bartcolighting.com/quickship-products/](http://www.bartcolighting.com/quickship-products/). Purchase order must reference "QuickShip".

## FEATURES

The BSS215 is a linear LED luminaire for general lighting applications. The 3-1/8" wide extruded aluminum housing is capped by a 2" tall, frosted, three-sided lens that produces a wide distribution of diffuse illumination. 1/4" thick machined aluminum end caps finish off the fixture ends.

Fixture with certain options available for 7-Day QuickShip.

## SPECIFICATIONS

Fixture constructed of an extruded aluminum housing, extruded, frosted acrylic lens and machined aluminum end caps

Model variations offered for surface, wall mount and cable suspended mounting with solid or luminous end options.

Standard finishes as shown below

Available in nominal lengths of 2'-8' single fixtures and continuous runs

Basic continuous run fixtures provided with 18 ga. wiring harness for 6 Amp maximum load (consult factory for runs requiring multiple circuits, sensor integration, etc.)

Standard integral 120-277V driver offered with 0-10V dimming or non-dim (other dimming driver options available)

Integral 120-277V emergency battery backup available for 4' nominal non-dim or 0-10V (consult factory for all other lengths/drivers)

Standard light outputs are 600, 840 or 1135 lumens per foot

LEDs available in 3000K, 3500K, 4000K, 5000K, within a 3 step MacAdam ellipse, all with 80+ CRI typical


Life: 50,000 hours  $L_{70}$

Passive infrared occupancy sensor available

Limited five year warranty

UL and C-UL listed for dry and damp locations

## SECTION



## PERFORMANCE

Note: All data reflects fixtures with 3500K LEDs and rectangular profile and solid ends

NOMINAL LENGTH	OUTPUT	LUMENS/ft.	WATTS/ft.	LUMINAIRE LUMENS	EFFICACY (LPW)
4'	L: low	600	5.0	2177	117
	R: regular	840	7.8	3100	108
	H: high	1135	11.1	4189	102





## BSS215 -

NOMINAL FIXTURE LENGTH*	CORRELATED COLOR TEMPERATURE	DRIVER	LENS	MOUNT	FINISH
2: 22-3/4"	27: 2700K-80+ CRI	ND: non-dimming	A: rectangular profile – solid end	SM: surface mount	AW: architectural white (semi-matte)
3: 33-3/4"	30: 3000K-80+ CRI	D: 0-10V, 1%	B: rectangular profile – luminous end	WD: wall mount – direct	WH: white (semi- gloss)
4: 44-3/4"	35: 3500K-80+ CRI	DTR: triac, 1%, (120V ONLY)		C4: cable mount 4' cable length	BL: black (semi- matte)
5: 55-3/4"	40: 4000K-80+ CRI	DLV: electronic low voltage, 1%, (120V ONLY)		C8: cable mount 8' cable length	MB: matte black
6: 66-3/4"		HES: Lutron EcoSystem, soft-on/fade-to-black, 1%		CF: consult factory for custom mounting	ESS: environmental satin silver
7: 77-3/4"		EL: eldoLED ECOdrive 0-10V, 1%	LIGHT OUTPUT (lumens per foot)	OPTIONS	BZ: bronze
8: 88-3/4"		ES: eldoLED SOLOdrive 0-10V, 0.1%	L: low – 600	ED: emergency driver (4' non-dim or 0-10V only)	PR: primer
		ELD: eldoLED ECOdrive DALI, 1%	R: regular – 840	S1A: occ sensor pos.1, 100%–0% ‡	CF: consult factory for custom finish
		ESD: eldoLED SOLOdrive DALI, 0.1%	H: high – 1135	S1B: occ sensor pos.1, 100%–50% ‡	SA: satin anodize (may require additional lead time)
			CF: consult factory for custom output	S2A: occ sensor pos.2, 100%–0% ‡	
				S2B: occ sensor pos.2, 100%–50% ‡	
				S3A: occ sensor pos.3, 100%–0% ‡	
				S3B: occ sensor pos.3, 100%–50% ‡	
				RUN CON- FIGURATION	
				SN: single	
				ST: starter	
				AD: adder	
				TR: terminator	

\* Actual dimension dependent on run configuration and sensor option.  
‡ See options section for details.

## LENS

	ORDERING CODE	DESCRIPTION	SPECIFICATIONS
	A	RECTANGULAR SOLID END	Rectangular profile with full height aluminum end cap
	B	RECTANGULAR LUMINOUS END	Rectangular profile with aluminum end cap and frosted acrylic lens end

## OPTIONS

ORDERING CODE	DESCRIPTION	SPECIFICATIONS
ED	EMERGENCY LED DRIVER	<ul style="list-style-type: none"> <li>Universal 120-277V input voltage emergency driver delivers initial minimum power of 10W for 90 minutes</li> <li>Available for 4' nominal length non-dim or 0-10V fixture only (consult factory for all other lengths/drivers)</li> </ul> <b>Note: remote battery backup available for shorter fixture lengths - ordered separately, consult factory for details</b>

### OCCUPANCY SENSOR


- Passive infrared occupancy sensor with hold-off daylighting adjustment (10-120 foot candles) and time delay adjustment from 30 seconds to 30 minutes
- Sensor adds 4" to overall fixture length
- Consult factory for custom output

S1A Occupancy sensor – position 1, 100% – 0%

Sensor located on the top at an end, with 100% – 0% light output setting

S1B Occupancy sensor – position 1, 100% – 50%

Sensor located on the top at an end, with 100% – 50% light output setting

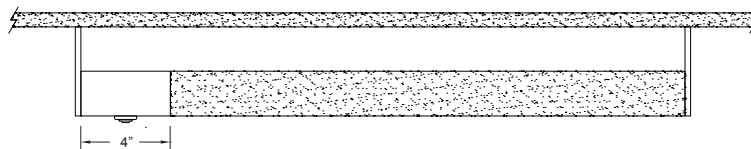


S2A Occupancy sensor – position 2, 100% – 0%

Sensor located on the side at the **right** end, with 100% – 0% light output setting


S2B Occupancy sensor – position 2, 100% – 50%

Sensor located on the side at the **right** end, with 100% – 50% light output setting



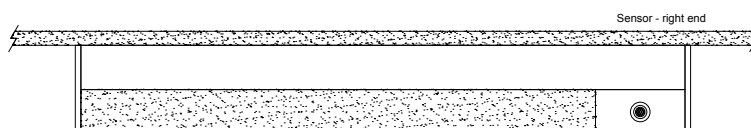


OPTIONS

ORDERING CODE	DESCRIPTION	SPECIFICATIONS
S3A	Occupancy sensor – position 3, 100% – 0%	Sensor located on the side at the <b>left</b> end, with 100% – 0% light output setting
S3B	Occupancy sensor – position 3, 100% – 50%	Sensor located on the side at the <b>left</b> end, with 100% – 50% light output setting

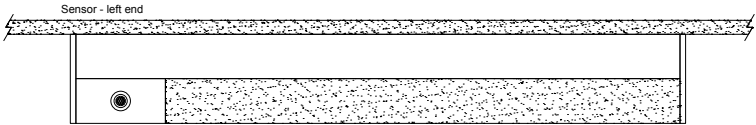

MOUNTING

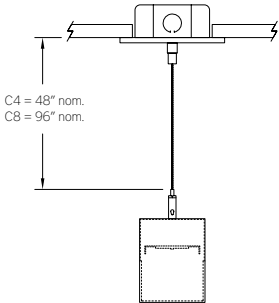	ORDERING CODE	DESCRIPTION
	SM	<b>SURFACE MOUNT</b> Use appropriate fastener through Ø3/16" holes in housing
	WD	<b>WALL MOUNT – DIRECT ORIENTATION</b> Mounting option includes: <ul style="list-style-type: none"><li>1-7/8" H x 2-1/2" W aluminum bracket projects the fixture housing 3/4" from the wall surface</li></ul>
	C4 and C8	<b>CABLE MOUNT</b> Mounting option includes: <ul style="list-style-type: none"><li>Ø 1/16"x 48" (C4) or 96" (C8) aircraft cables</li><li>60" (C4) or 108" (C8) power cable (in coordinating finish)</li><li>Bracket bars</li><li>Ø 5" white canopies</li><li>Ceiling couplers</li><li>Side exit cable grippers</li></ul>

# BSS215 | **bodhi**

3-1/8" wide LED luminaire with drop lens

## LENGTH / MOUNTING DIMENSIONS

ORDERING CODE	LENGTH A*	LENGTH B*	LENGTH C*	LENGTH D*	LENGTH E*
2	22-3/4"	22-1/2"	22-1/4"	16-3/4"	19-1/2"
3	33-3/4"	33-1/2"	33-1/4"	27-3/4"	30-1/2"
4	44-3/4"	44-1/2"	44-1/4"	38-3/4"	41-1/2"
5	55-3/4"	55-1/2"	55-1/4"	49-3/4"	52-1/2"
6	66-3/4"	66-1/2"	66-1/4"	60-3/4"	63-1/2"
7	77-3/4"	77-1/2"	77-1/4"	71-3/4"	74-1/2"
8	88-3/4"	88-1/2"	88-1/4"	82-3/4"	85-1/2"


\* Add 4" to dimension for any fixture using the S1, S2 or S3 occupancy sensor option

## RUN CONFIGURATION INFORMATION


ORDERING CODE	DESCRIPTION
SN	Single
ST	Starter
AD	Adder
TR	Terminator

## RUN INFORMATION


### Back Plan - Surface Mount Single Fixture Option

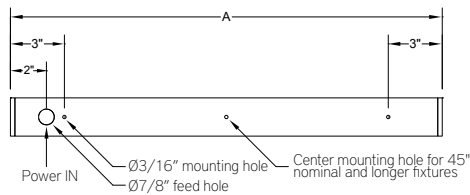


### Side View - Surface Mount Single Fixture Option

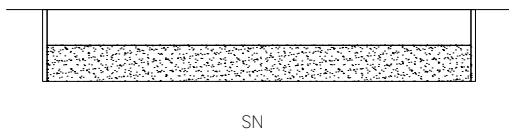

### Back Plan - Surface Mount Continuous Run Option

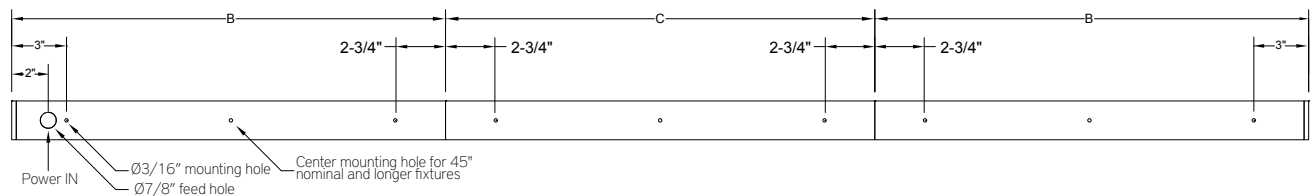

### Side View - Surface Mount Continuous Run Option

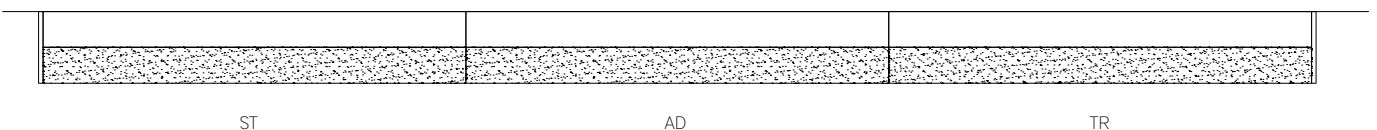


# BSS215 | **bodhi**

3-1/8" wide LED luminaire with drop lens


RUN INFORMATION

Side View- Cable Mount Single Fixture Option

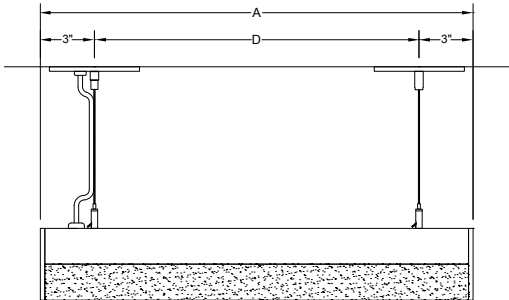

SN

Side View - Cable Mount Continuous Run Option

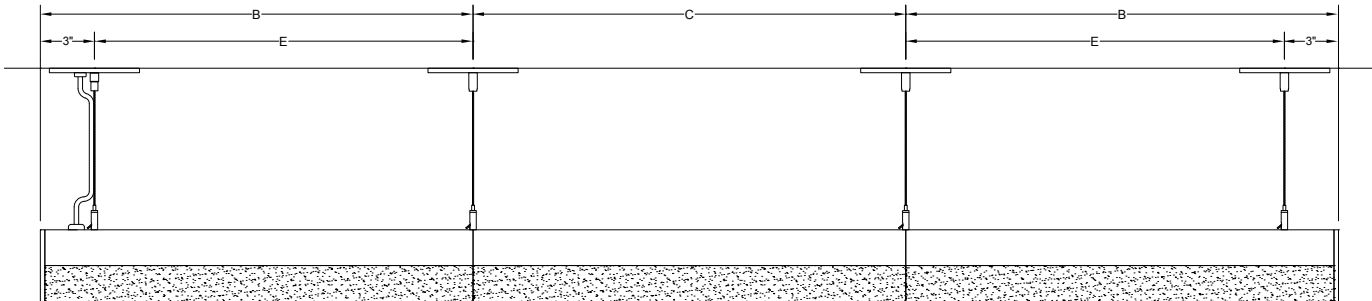

ST

AD

TR