


# BSS260 | **bodhi**

3-1/4" wide direct/indirect LED luminaire

Project: \_\_\_\_\_ Type: \_\_\_\_\_

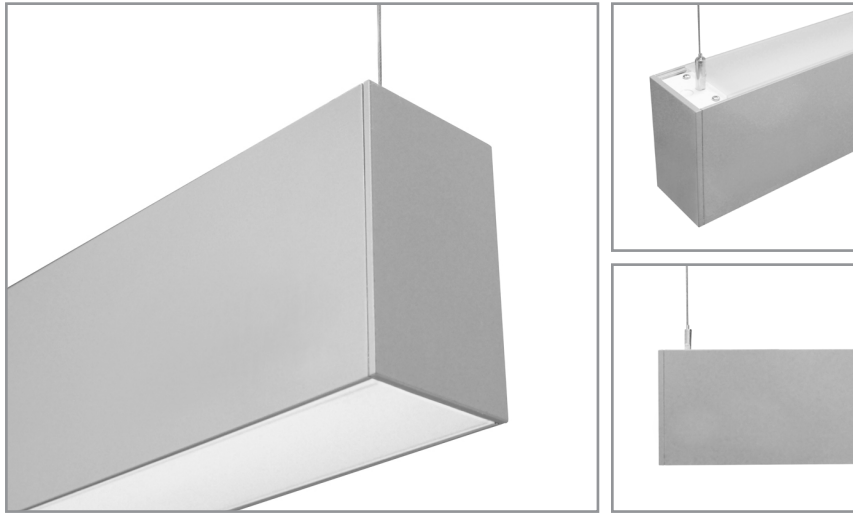

## FEATURES

The Bodhi series BSS260 is a rectilinear direct/indirect LED luminaire for general lighting applications. The 3-1/4" wide by 5-1/2" high extruded aluminum housing is offered for wall or cable suspended mounting. The two LED sources can be configured independently for both switching, color temperature and lumen output.

## SPECIFICATIONS

Fixture constructed of extruded aluminum, frosted extruded acrylic lenses and machined aluminum end caps

Model variations offered for wall mount and cable suspended applications

Standard finishes as shown below

Available in nominal lengths of 2'-8" single fixtures and continuous runs

Continuous runs fitted with quick connects for simple, efficient wiring

Available with dual circuiting of up light and down light elements and independent Wattage/foot options

Standard integral 120-277V driver offered with 0-10V dimming or non-dim (other dimming driver options available)

Remote mounted emergency battery backup available (ordered separately, consult factory for details)

Standard outputs are 5W and 8W nominal per foot


LEDs available in 3000K, 3500K, 4000K, 5000K, all with a typical 84-85 CRI and color consistency within a 3 step MacAdam ellipse

Life: 50,000 hours L<sub>70</sub>

Limited five year warranty

UL and C-UL listed for dry and damp locations

## SECTION

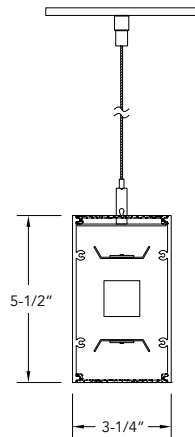

## PERFORMANCE

NOMINAL LENGTH	WATTS/ft.	TOTAL WATTS	LUMINAIRE LUMENS	EFFICACY
45"	16.6 (2 X 8.3)	61.8	6082	98

\*Note: All data reflects fixtures with 3000K LEDs



## BSS260 -


NOMINAL FIXTURE LENGTH*	CORRELATED COLOR TEMPERATURE	DRIVER	UP LIGHT WATTS/FOOT	MOUNT	FINISH
2: 22-5/8"	30: 3000K-84 CRI	ND: non-dimming <b>[Dimming]</b>	5: 5 W/ft.	C4: cable mount 4' cable length	AW: architectural white (semi-matte)
3: 33-5/8"	35: 3500K-85 CRI	DM: 0-10V, 1%	8: 8.3 W/ft.	C8: cable mount 8' cable length	WH: white (semi-gloss)
4: 44-5/8"	40: 4000K-85 CRI	HES: Lutron EcoSystem, soft-on fade-to-black, 1%	CF: consult factory for custom output	WM: wall mount	BL: black (semi-matte)
5: 55-5/8"	50: 5000K-85 CRI	H2: Lutron Hi-lume 2-wire forward phase, 1%, (120V ONLY)		CF: consult factory for custom mounting	MB: matte black
6: 66-5/8"		EL: eldoLED ECOdrive 0-10V, 1%	<b>CIRCUIT</b>		ESS: environmental satin silver
7: 77-5/8"		ES: eldoLED SOLOdrive 0-10V, 0.1%	1: single circuit	<b>DOWN LIGHT WATTS/FOOT</b>	BZ: bronze
8: 88-5/8"		ELD: eldoLED ECOdrive DALI, 1%	2: dual circuit	5: 5 W/ft.	PR: primer
		ESD: eldoLED SOLOdrive DALI, 0.1%		8: 8.3 W/ft.	CF: consult factory for custom finish
				CF: consult factory for custom output	SA: satin anodize (may require additional lead time)

\* Actual dimension dependent on run configuration

MOUNTING

ORDERING CODE

DESCRIPTION

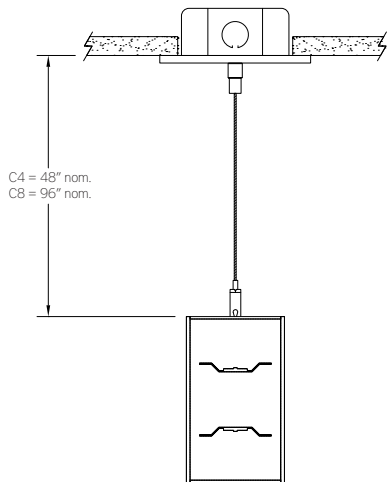


C4 and C8

CABLE MOUNT

Mounting option includes:

- Ø 1/16" x 48" (C4) or 96" (C8) aircraft cables
- 18 gauge x 60" (C4) or 108" (C8) SJT power cable (in coordinating finish)
- Bracket bars
- Ø 5" white canopies
- Ceiling couplers
- Side exit cable grippers

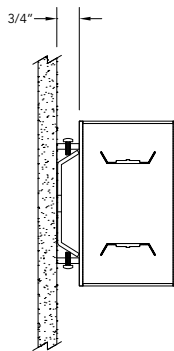

WM

WALL MOUNT

Mounting option includes:

- Use appropriate fasteners through Ø3/16" holes in heavy gauge mounting bracket
- 4" H x 4" W aluminum trim collar projects the fixture housing 3/4" from the wall surface
- Set screws

## LENGTH/MOUNTING DIMENSIONS


ORDERING CODE	LENGTH A	LENGTH B	LENGTH C	LENGTH D	LENGTH E
2	22-5/8"	22-3/8"	22-1/8"	21-1/8"	21-5/8"
3	33-5/8"	33-3/8"	33-1/8"	32-1/8"	32-5/8"
4	44-5/8"	44-3/8"	44-1/8"	43-1/8"	43-5/8"
5	55-5/8"	55-3/8"	55-1/8"	54-1/8"	54-5/8"
6	66-5/8"	66-3/8"	66-1/8"	65-1/8"	65-5/8"
7	77-5/8"	77-3/8"	77-1/8"	76-1/8"	76-5/8"
8	88-5/8"	88-3/8"	88-1/8"	87-1/8"	87-5/8"

## RUN CONFIGURATION INFORMATION


ORDERING CODE	DESCRIPTION
SN	Single
ST	Starter
AD	Adder
TR	Terminator

## RUN INFORMATION


Plan - Wall Mount Single Fixture Option

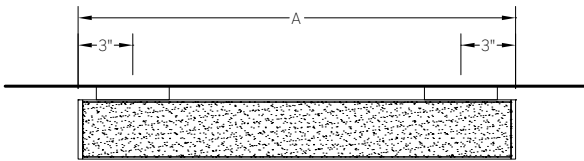


Rear View - Wall Mount Single Fixture Option

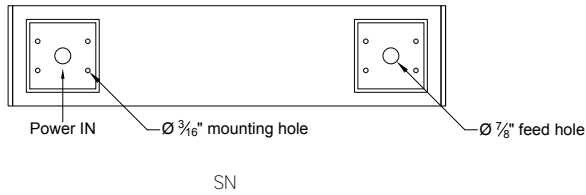

Plan - Wall Mount Continuous Run Option

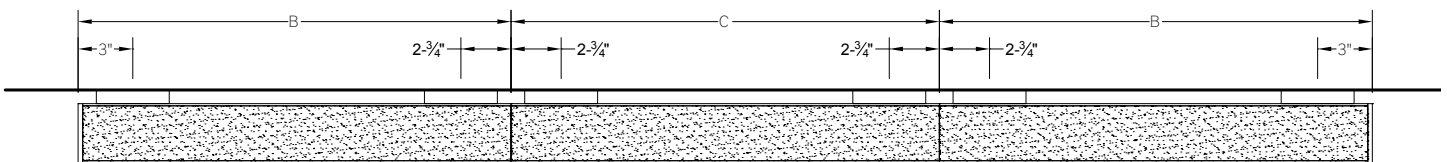

Rear View - Wall Mount Continuous Run Option

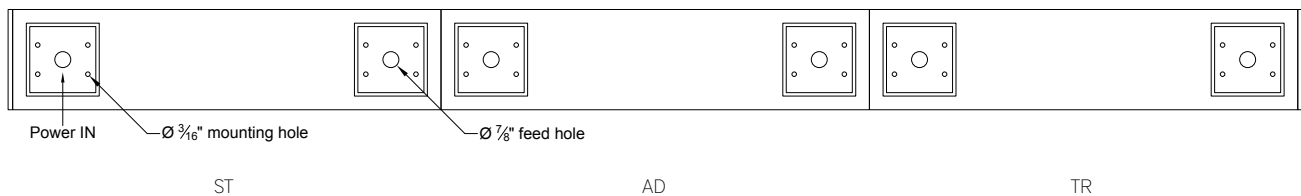


# BSS260 | **bodhi**

3-1/4" wide direct/indirect LED luminaire

## RUN INFORMATION

Side View - Cable Suspended Single Fixture

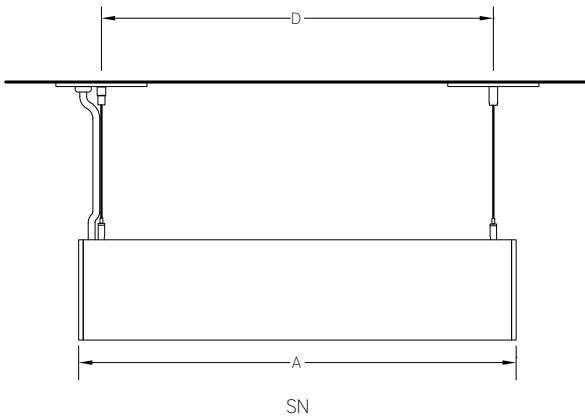

Side View - Cable Suspended Continuous Run Option

