

# PRELIMINARY

## BSS260 | GENERAL INFORMATION



Rectilinear LED up/down light fixture

Project: \_\_\_\_\_ Type: \_\_\_\_\_



### FEATURES

The BSS260 is a cable suspended linear LED luminaire for general lighting applications. The 3-1/4" wide by 5-1/2" high extruded aluminum housing provides up and down light elements. The two LED light sources are fitted with frosted acrylic lenses and 1/4" thick machined aluminum end caps finish off the fixture ends.

### SPECIFICATIONS

Fixture constructed of extruded aluminum, frosted extruded acrylic lenses and machined aluminum end caps

Standard finishes include satin anodize, or Fluoroscope White (semi-matte), white (semi-gloss), black (semi-matte), matte black, silver, platinum, bronze and primer powder coat, applied post production (consult factory for custom finishes)

Available in nominal lengths of 24"-89" single fixtures and continuous runs

Continuous runs fitted with quick connects for simple, efficient wiring

Available with single or dual circuit wiring of up light and down light elements and independent Wattage/foot options

Standard driver offered with 0-10V dimming or non-dim

Other dimming driver options available (refer to supplemental driver sheet for general information and consult factory for details)

Remote mounted emergency battery backup available (ordered separately, consult factory for details)

LEDs available in 3000K, 3500K, 4000K, 5000K, all with a typical 84-85 CRI and color consistency within a 3 step MacAdam ellipse

Lamp life rated at 50,000 hours


Limited five year warranty

UL and C-UL listed for dry and damp locations

IBEW manufactured and assembled

Made in U.S.A.

### SECTION

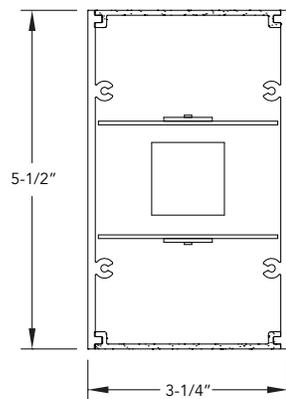


### PERFORMANCE

NOMINAL LENGTH	WATTS/ft.	TOTAL WATTS	LUMINAIRE LUMENS	EFFICACY
45"	16.6 (2 X 8.3)	61.8	6082	98

\*Note: All data reflects fixtures with 3000K LEDs

### BSS260 +

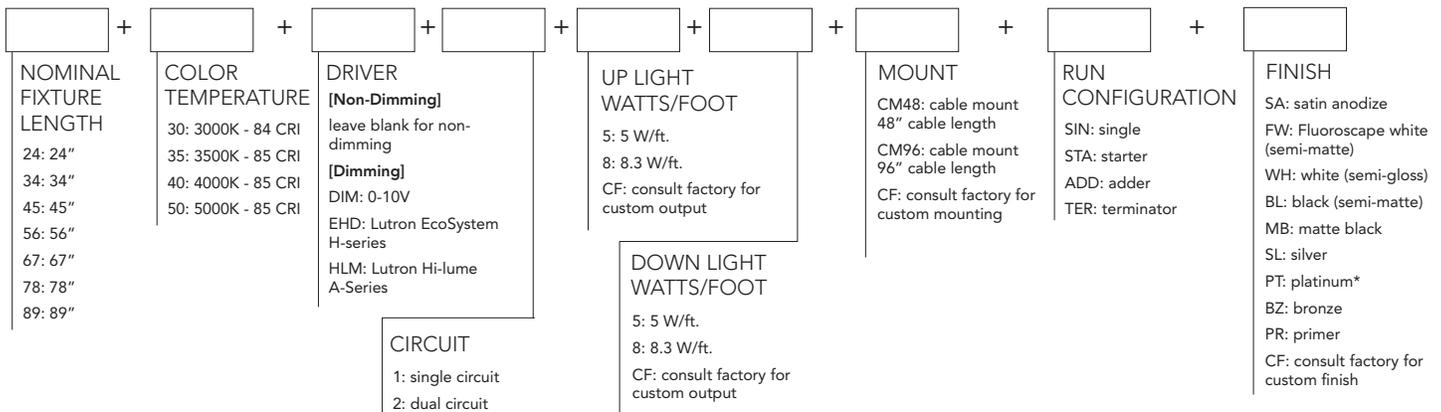


\* A standard finish requiring a two step coating process, premium will apply.

### MOUNTING

#### ORDERING CODE

#### DESCRIPTION

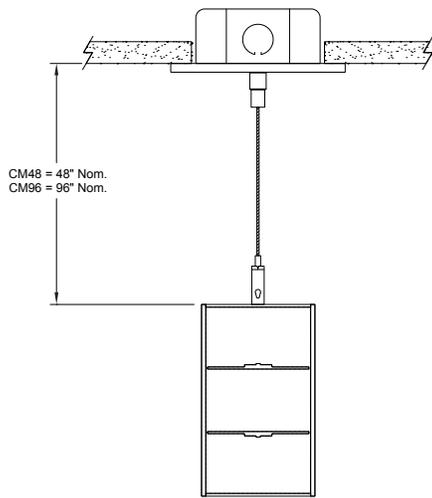

CM48 and CM96

#### CABLE MOUNT

Mounting option includes:

- $\varnothing$  1/16" x 48" (CM48) or 96" (CM96) aircraft cables
- 18 gauge x 60" (CM48) or 102" (CM96) SJT power cable (in coordinating finish)
- Bracket bars
- $\varnothing$  5" white canopies
- Ceiling couplers
- Side exit cable grippers