


BSS501 | TUBULAR

Ø1-3/8" arm mount LED luminaire, remote driver

Project: _____ Type: _____

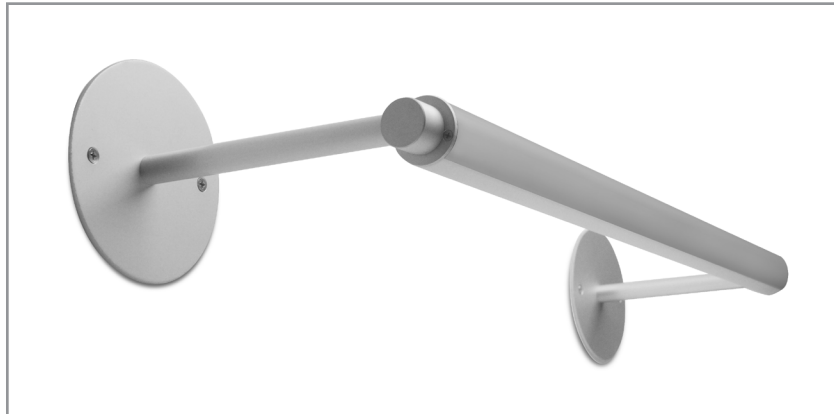

FEATURES

Part of the Tubular family of LED luminaires, the BSS501 is an arm mounted model ideally suited for wall wash and stack lighting. Slender aluminum arms project the Ø1-3/8" extruded aluminum housing from a wall or ceiling, while machined aluminum couplers allow a generous range of rotation for flexible aiming. The BSS501 is fitted with 90+ CRI LEDs and is available with a Lambertian or asymmetric lens optic.

SPECIFICATIONS

Fixture housing constructed of an extruded aluminum tube, frosted acrylic extruded lens and sheet aluminum end caps.

Fixture arms are constructed of steel pipe, Ø5/8" extruded aluminum sleeves and machined aluminum end cap couplers.

Mounting plate options include a Ø4-3/4" aluminum plate for mounting to 4" octagonal wall boxes or Ø1-3/8" aluminum plate for mounting to accessible panels.

Standard finishes as shown below.

Single and continuous run fixtures available with arm center distances of 24"–90".

Arms allow fixture to project from a wall or ceiling nominally 3", 6", 12" or 18".

Fixture housing rotates 332° and is locked in place with hex fastener.

Included standard remote 120-277V driver offered with 0-10V dimming or non-dim (other dimming driver options available).

Extruded acrylic lens options available for Lambertian or asymmetric light distributions.

Fixture wired with 10', low voltage leads (measured from the end cap).

Standard outputs range from 400 to 535 lumens per foot, dependent on optic.


LEDs available in 2700K, 3000K, 3500K, and 4000K, within a 3 step MacAdam ellipse, all with 90+ CRI typical.

Life: 50,000 hours L₇₀.


Limited five year warranty.

UL and C-UL listed for dry and damp locations.

PROFILE

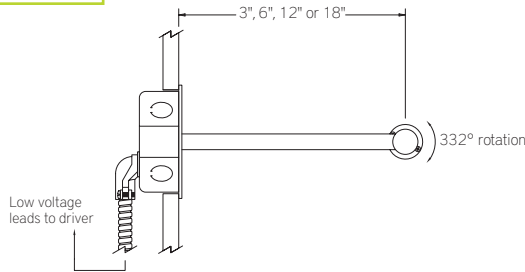

SECTION



PERFORMANCE

Note: All data reflects fixtures with 3500K LEDs

NOMINAL LENGTH	OPTIC OPTION	OUTPUT	LUMENS/ft.	WATTS/ft.	LUMINAIRE LUMENS	EFFICACY (LPW)
4'	Lambertian	L: low	400	3.9	1675	102
		R: regular	520	5.6	2175	92
	Asymmetric	L: low	415	3.9	1735	106
		R: regular	535	5.6	2253	96





BSS501 -



ARM CENTER DISTANCE	CORRELATED COLOR TEMPERATURE	DRIVER	LIGHT OUTPUT (lumens per foot w/optic option L)	NOMINAL ARM LENGTH	MOUNTING PLATE OPTION	FINISH
24: 24"		ND: non-dimming	L: low – 400	3: 3"	WBR: wall box plate	AW: architectural white (semi-matte)
28: 27-11/16"	27: 2700K-90+ CRI	D: 0-10V, 1%	R: regular – 520	6: 6"	TP: trim plate	WH: white (semi-gloss)
31: 31-3/8"	30: 3000K-90+ CRI	DTR: triac, 1%	CF: consult factory for custom output	12: 12"		BL: black (semi-matte)
35: 35"	35: 3500K-90+ CRI	DLV: electronic low voltage, 1%		18: 18"		MB: matte black
39: 38-11/16"	40: 4000K-90+ CRI	HES: Lutron Eco-System, soft-on fade-to-black, 1%		CF: consult factory for custom arm length		ESS: environmental satin silver
42: 42-3/8"		EL: eldoLED ECO-drive 0-10V, 1%				BZ: bronze
46: 46"		ES: eldoLED SOLO-drive 0-10V, 0.1%				PR: primer
50: 49-11/16"	75: 75-3/8"	ELD: eldoLED ECOdrive DALI, 1%				CF: consult factory for custom finish
53: 53-3/8"	79: 79"	ESD: eldoLED SOLOdrive DALI, 0.1%				SA: satin anodize (may require additional lead time)
57: 57"	83: 82-11/16"					
61: 60-11/16"	86: 86-3/8"					
64: 64-3/8"	90: 90"					
68: 68"	94: 93-11/16"					
72: 71-11/16"	97: 97-3/8"					

Note: Each fixture includes a remote driver matched for fixture length and light output.

OPTIC OPTION

ORDERING CODE	DESCRIPTION
	L Lambertian light distribution
	A Asymmetric light distribution

MOUNTING PLATE OPTION

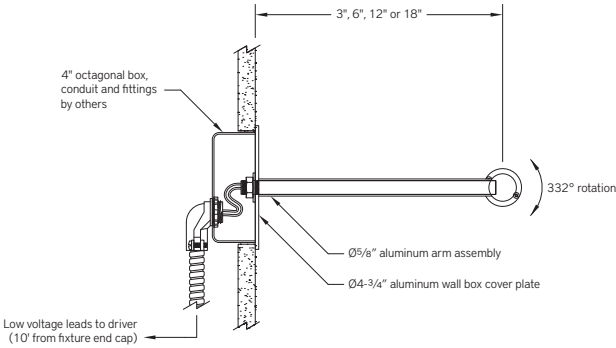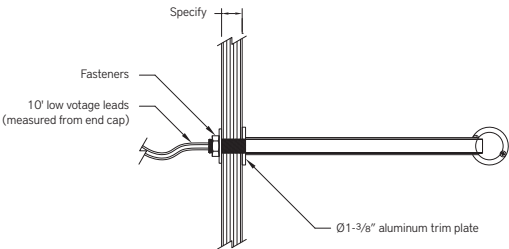ORDERING CODE	DESCRIPTION
	WBR WALL BOX MOUNTING PLATE • Ø4-3/4" x 1/8" sheet aluminum plate in matching finish for mounting to 4" octagonal junction box (by others) • Includes flat head Phillips machine screws
	TP TRIM PLATE • Ø1-3/8" x 1/8" sheet aluminum plate in matching finish for mounting to a panel with access to the back side • Includes 10' low voltage leads (measured from end cap), flat washer and hex nut • Accommodates panel thickness up to 3/4" – (consult factory for special mounting conditions)

ARM CENTER DISTANCE


ORDERING CODE	LENGTH A	ORDERING CODE	LENGTH A	ORDERING CODE	LENGTH A
24	24"	50	49-11/16"	75	75-3/8"
28	27-11/16"	53	53-3/8"	79	79"
31	31-3/8"	57	57"	83	82-11/16"
35	35"	61	60-11/16"	86	86-3/8"
39	38-11/16"	64	64-3/8"	90	90"
42	42-3/8"	68	68"	94	93-11/16"
46	46"	72	71-11/16"	97	97-3/8"

RUN CONFIGURATION INFORMATION

ORDERING CODE	DESCRIPTION
SN	Single
ST	Starter
AD	Adder
TR	Terminator

RUN INFORMATION

Single Fixtures

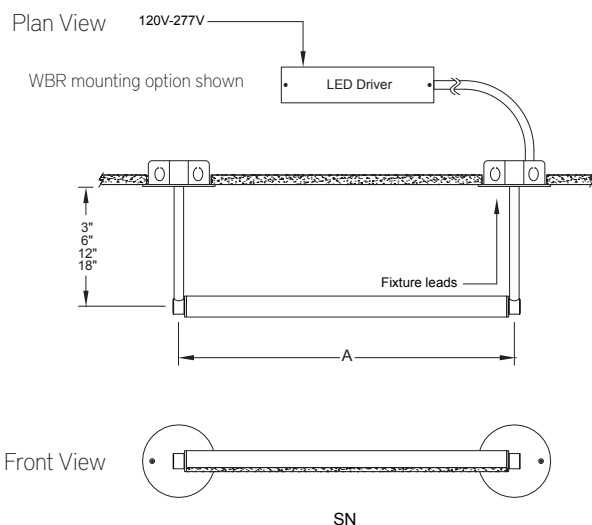

Continuous Runs

