

BSS520 | TUBULAR

Ø3-1/2" suspended LED luminaire



Project: _____ Type: _____



FEATURES

The Tubular series BSS520 is a suspended linear LED down light for general lighting applications. The Ø3-1/2" extruded aluminum housing is fitted with tightly spaced diodes and a frosted acrylic lens to produce seamless, diffuse illumination. Heavy gauge aluminum end caps finish off the fixture ends.

SPECIFICATIONS

Fixture constructed of an extruded aluminum housing, frosted extruded acrylic lens and sheet aluminum end caps.

Standard finishes as shown below.

Available in nominal lengths of 23"–89" single fixtures and continuous runs.

Continuous run fixtures provided with quick connects for simple, efficient wiring.

Single and Starter fixtures include coordinating (white, metal braided) 18 ga. power cable.

Standard integral 120-277V driver offered with 0-10V dimming or non-dim (other dimming driver options available).

Integral 120-277V emergency battery backup available for 45"–89" fixtures (remote battery backup available for shorter fixture lengths – ordered separately, consult factory for details).

Standard outputs are 5W or 8W nominal per foot.

LEDs available in 3000K, 3500K, 4000K, 5000K, all with a typical 90+ CRI and color consistency within a 3 step MacAdam ellipse.

Life: 50,000 hours L₇₀.

Limited 5 year warranty.

UL and C-UL listed for dry and damp locations.




PERFORMANCE


Note: All data reflects fixtures with 3500K LEDs

NOMINAL LENGTH	WATTS/ft.	TOTAL WATTS	LUMINAIRE LUMENS	EFFICACY (LPW)
45"	8.5	31.8	3544	111

SECTION



SIDE

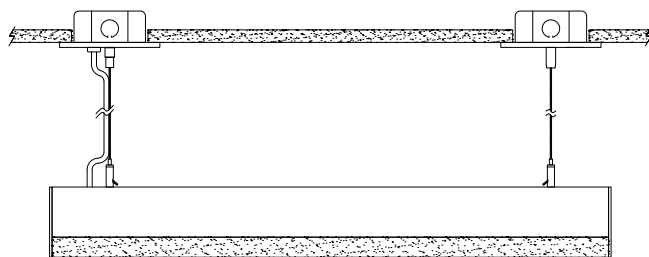

BSS520 -

NOMINAL FIXTURE LENGTH*

23: 22-1/2"
34: 33-1/2"
45: 44-1/2"
56: 55-1/2"
67: 66-1/2"
78: 77-1/2"
89: 88-1/2"

CORRELATED COLOR TEMPERATURE

30: 3000K-90+ CRI
35: 3500K-90+ CRI
40: 4000K-90+ CRI
50: 5000K-90+ CRI

DRIVER

ND: non-dimming
[Dimming]
D: 0-10V, 1%
DTR: triac, 1%
DLV: electronic low voltage, 1%
HES: Lutron EcoSystem, soft-on fade-to-black, 1%
EL: eldoLED ECOdrive 0-10V, 1%
ES: eldoLED SOLOdrive 0-10V, 0.1%
ELD: eldoLED ECOdrive DALI, 1%
ESD: eldoLED SOLOdrive DALI, 0.1%

WATTS/FOOT

5: 5 W/ft.
8: 8.5 W/ft.
CF: consult factory for custom wattage

MOUNT

C4: cable mount
4' cable length
C8: cable mount
8' cable length
CF: consult factory for custom mounting

RUN CONFIGURATION

SN: single
ST: starter
AD: adder
TR: terminator

OPTION

ED: emergency driver (45"–89" lengths only)


FINISH

AW: architectural white (semi-matte)
WH: white (semi-gloss)
BL: black (semi-matte)
MB: matte black
ESS: environmental satin silver
BZ: bronze
PR: primer
CF: consult factory for custom finish


SA: satin anodize (may require additional lead time)

* Actual dimension dependent on run configuration.

MOUNTING

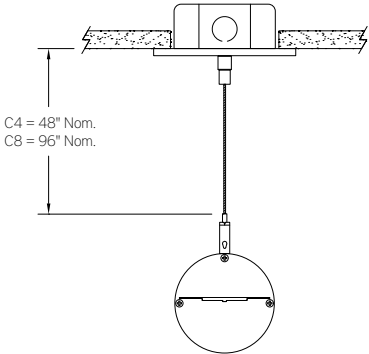	ORDERING CODE	DESCRIPTION
	C4 and C8	CABLE MOUNT Mounting option includes: • Ø 1/16" x 48" (C4) or 96" (C8) aircraft cables • 18 gauge x 60" (C4) or 108" (C8) power cable (in coordinating finish) • Bracket bars • Ø 5" white canopies • Ceiling couplers • Side exit cable grippers

OPTIONS

	ORDERING CODE	DESCRIPTION	SPECIFICATIONS
	ED	Emergency LED Driver	• Universal 120-277V input voltage emergency driver delivers initial minimum power of 10W for 90 minutes • Combination test switch/indicator light located on fixture housing, 1-5/8" from the power feed end

Ø3-1/2" suspended LED luminaire


RUN CONFIGURATION INFORMATION

ORDERING CODE	LENGTH A	LENGTH B	LENGTH C
23	16-1/2"	19-3/8"	22-1/4"
34	27-1/2"	30-3/8"	33-1/4"
45	38-1/2"	41-3/8"	44-1/4"
56	49-1/2"	52-3/8"	55-1/4"
67	60-1/2"	63-3/8"	66-1/4"
78	71-1/2"	74-3/8"	77-1/4"
89	82-1/2"	85-3/8"	88-1/4"

ORDERING CODE	DESCRIPTION
SN	Single
ST	Starter
AD	Adder
TR	Terminator


RUN INFORMATION

Side View - Cable Mount Single Fixture Option

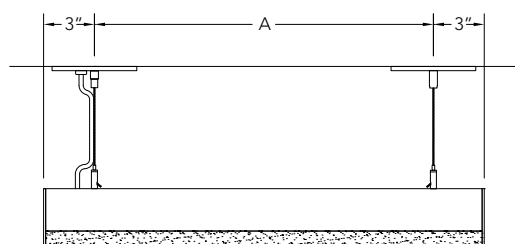

SN

Side View - Cable Mount Continuous Run Option

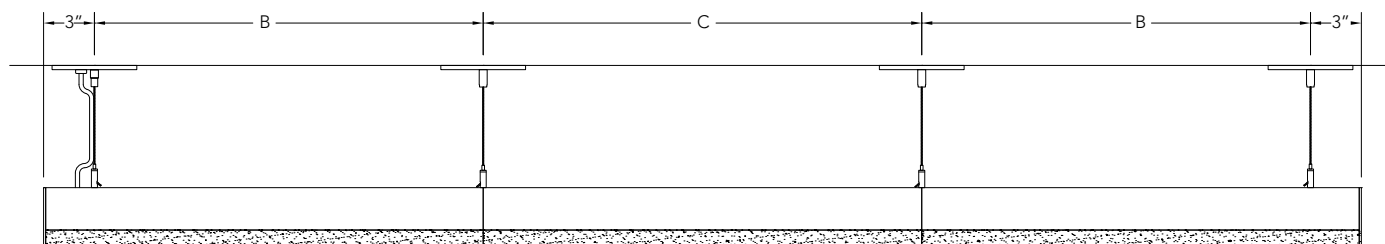

ST

AD

TR