



1. Mount aircraft cable kits according to dimensions shown in cutsheet or submittal drawing (for detailed cable kit mounting instructions refer to page 2). Run power through mounting surface and into JBOX (by others). Cable kits can be installed before feeding cable into cable grippers attached to fixture.

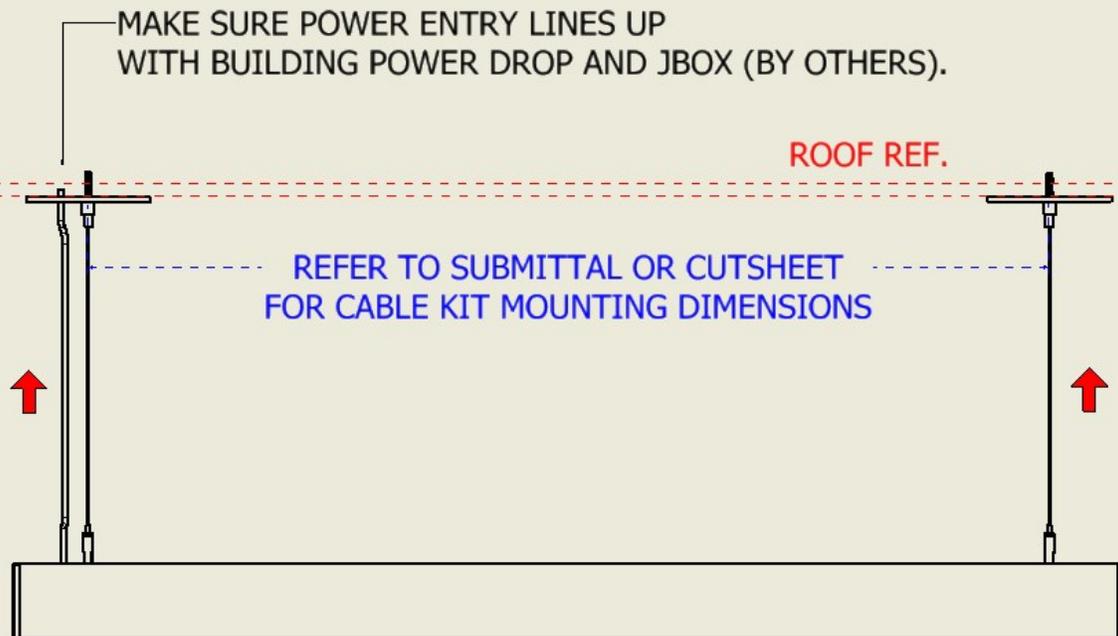

2. Reference information for cable mounted fixtures.

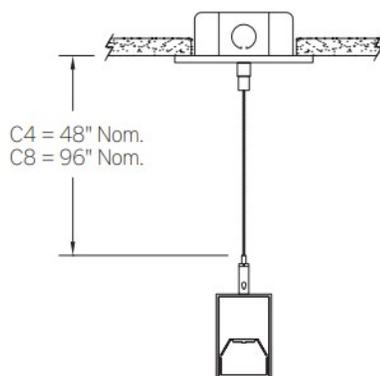

C4 and C8

CABLE MOUNT


- Mounting option includes:
- \varnothing 1/16" x 48" (C4) or 96" (C8) aircraft cables
 - 60" (C4) or 108" (C8) power cable (in coordinating finish)
 - Bracket bars
 - \varnothing 5" white canopies
 - Ceiling couplers
 - Side exit cable grippers

Warnings and Information

- Risk of shock or fire. Disconnect power before installing or servicing.
- LED installation requires knowledge of luminaire electrical systems. If not qualified, do not attempt installation.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.

©2024 Bartco Lighting, Inc. These products are protected by patents and patents pending. Unauthorized use or reproduction of illustrations, photographs or text is prohibited. Bartco Lighting reserves the right to discontinue products or to change the technical and/or design specifications at any time.

AIRCRAFT KIT DIAGRAM

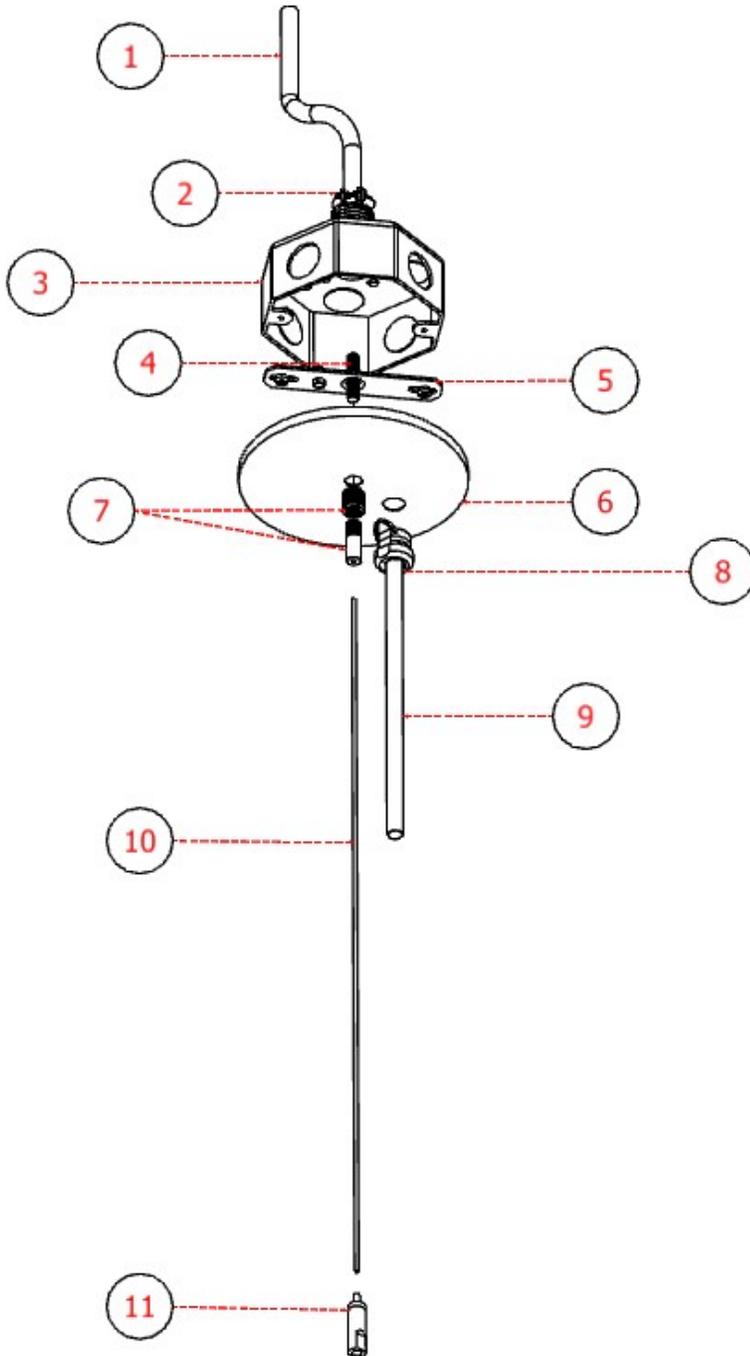

PARTS LIST:

1. Primary Wire **(By Others)**
2. Cable Clamp **(By Others)**
3. Junction Box **(By Others)**
4. Mounting Stud
5. Bracket Bar
6. Ceiling Canopy
7. Cable Coupler and Slip Ring
8. Strain Relief
9. Power Cord
10. Aircraft Cable
11. Cable Gripper

INSTALLATION STEPS:

1. Mount junction box to desired location.
2. Feed primary power to JBOX.
3. Install cable clamp to primary power
4. Feed fixture power cord through ceiling canopy with strain relief, then make all necessary wiring connections to primary wire.
5. Mount Bracket bar to JBOX.
6. Place ceiling canopy flush with junction box and feed mounting stud through center hole.
7. Feed aircraft cable through cable coupler, then attach cable coupler to mounting stud through ceiling canopy. Verify canopy is flush with ceiling.
8. Feed aircraft cable into cable gripper attached to fixture. Verify desired length of cable.
9. Make adjustments to cable length until fixture is level, then trim excess cable.
10. Check all connections are secure and stable, then check fixture for proper function.

Warnings and Information

- Risk of shock or fire. Disconnect power before installing or servicing.
- LED installation requires knowledge of luminaire electrical systems. If not qualified, do not attempt installation.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.

©2024 Bartco Lighting, Inc. These products are protected by patents and patents pending. Unauthorized use or reproduction of illustrations, photographs or text is prohibited. Bartco Lighting reserves the right to discontinue products or to change the technical and/or design specifications at any time.