

R10-UC | LED FIXTURE

LED undercabinet fixture



Project: _____ Type: _____



SPECIFICATIONS

Fully assembled housing is formed and welded, 20 ga. steel, chemically treated to resist corrosion and enhance paint adhesion

Standard finishes include Fluorescape White (semi-matte), white (semi-gloss), black, silver, platinum powder coat, applied post production (consult factory for custom finishes)

Includes clear, frosted, linear prismatic or white acrylic lay-in lens

For use with Bartco R10 LED lamp module in 2700K, 3000K, 4000K and 5000K color temperatures (ordered separately)

Driver is universal voltage (120V-277V) non-dimming, offered with 300mA or 500mA output

Options include on/off rocker switch in coordinating finish and passive infrared occupancy sensor

Knock outs accept standard electrical fittings (by others)

Lamp life rated at 50,000 hours


Limited three year warranty

UL and C-UL listed for dry and damp locations

IBEW manufactured and assembled

Made in U.S.A.

PROFILE

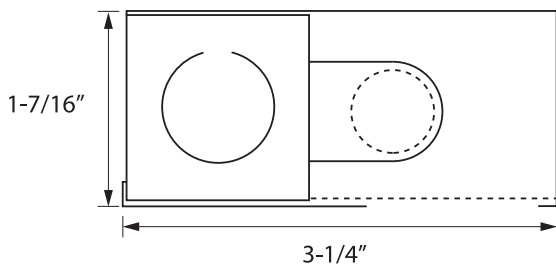

R10-UC +

	+		+		+		+			
LENGTH		COLOR TEMPERATURE		DRIVER CURRENT		LENS		OPTIONS		FINISH
2: 22-9/16"		27: 2700K		1: 300 mA		C: clear		SW: rocker switch		FW: Fluorescape white (semi-matte)
3: 34-3/8"		30: 3000K		2: 500 mA		F: frosted		OC: occupancy sensor		WH: white (semi-gloss)
4: 46-3/16"		40: 4000K				PR: linear prismatic				BL: black
5: 5' nom.		50: 5000K				WAC: white acrylic				SL: silver
										PT: platinum
										CF: consult factory for custom color