




BLT210 | GENERAL INFORMATION

Rectilinear LED fixture with drop down frosted lens

Project: _____ Type: _____

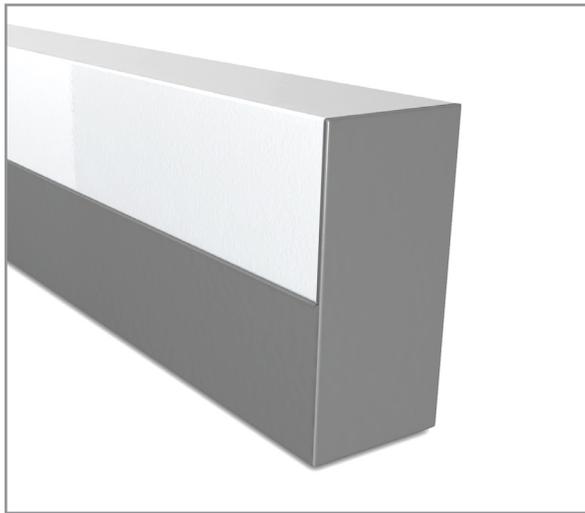

SPECIFICATIONS

Fully assembled housing is formed and welded, 20 ga. steel, chemically treated to resist corrosion and enhance paint adhesion

Model variations offered for surface and cable suspended applications

Available in standard white, black, silver, platinum, bronze and primer powder coat, applied post production (consult factory for custom finishes)

Field adjustable cable hanger can be located at nearly any point along the fixture length

Available in nominal 23"-89" single fixtures and continuous runs

Standard driver offered with 0-10V dimming or non-dim

Other dimming driver options available (refer to supplemental driver details sheet for availability)

Knock-outs accept standard electrical fittings by others (consult factory for other locations)

Remote mounted emergency battery backup available (ordered separately, consult factory for details)

LEDs available in 3000K, 3500K, 4000K, 5000K, all with a typical 84-85 CRI and color consistency within a 3 step MacAdam ellipse

Lamp life rated at 50,000 hours


Limited five year warranty

UL and C-UL listed for dry and damp locations

IBEW manufactured and assembled

Made in U.S.A.


SECTION



PLAN



SIDE



PERFORMANCE

NOMINAL LENGTH	WATTS/FT.	TOTAL WATTS	LUMINAIRE LUMENS	EFFICACY
45"	5.0	18.8	2204	117
45"	8.5	31.8	3736	118

*Note: All data reflects fixtures with 3500K LEDs

BLT210 +

FIXTURE LENGTH	COLOR TEMPERATURE	DRIVER	WATTS/FOOT	LENS	MOUNT	FINISH
23: 22-1/4"	30: 3000K - 84 CRI	[Non-Dimming] leave blank for non-dimming	5: 5 W/ft.	leave blank for square lens	SM: surface mount	SA: satin anodize
34: 33-1/4"	35: 3500K - 85 CRI	[Dimming] DIM: Advance 0-10V	8: 8.5 W/ft.	R: round lens	CM48: cable mount 48" cable length	FW: Fluorscape white (semi-matte)
45: 44-1/4"	40: 4000K - 85 CRI	ESYS: Lutron	CF: consult factory for custom wattage		CM96: cable mount 96" cable length	WH: white (semi-gloss)
56: 55-1/4"	50: 5000K - 85 CRI	EcoSystem 5-Series			CF: consult factory for custom mounting	BL: black
67: 66-1/4"		HLM: Lutron Hi-lume				MB: matte black
78: 77-1/4"		A-Series				SL: silver
89: 88-1/4"						PT: platinum*
						BZ: bronze
						PR: primer
						CF: consult factory for custom finish

* A standard finish requiring a 2 step coating process, premium will apply