


BSS230 | **bodhi**

3-1/8" wide LED luminaire with flush lens, remote driver



Project: _____ Type: _____

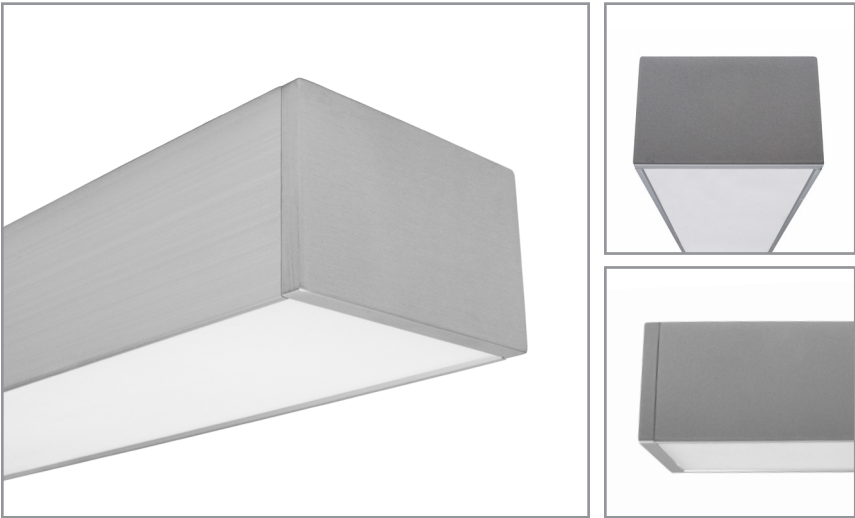


FEATURES

The Bodhi® BSS230 is a low profile, remote driven, linear LED luminaire for general lighting applications. The 2" tall by 3-1/8" wide extruded aluminum housing is capped with a flat lens. ¼" thick machined aluminum end caps finish off the fixture ends.

SPECIFICATIONS

- Fixture constructed of an extruded aluminum housing, extruded, frosted acrylic lens and machined aluminum end caps.
- Model variations offered for surface and cable suspended applications.
- Field adjustable cable hangers can be located at nearly any point along the fixture length.
- Standard finishes as shown below.
- Available in nominal lengths of 2'-8 as single fixtures and continuous runs.
- Surface mount fixtures wired with 10' low voltage leads.
- Included standard remote 120-277V driver offered with 0-10V dimming or non-dim (other dimming driver options available).
- Remote mounted emergency battery backup available (ordered separately, consult factory for details).
- Standard outputs are 5W and 8W nominal per foot.
- LEDs available in 2700K, 3000K, 3500K, and 4000K, within a 3 step MacAdam ellipse, all with 90+ CRI typical.
- Life: 50,000 hours L₇₀.
- Limited five year warranty.
- UL and C-UL listed for dry and damp locations.

SECTION

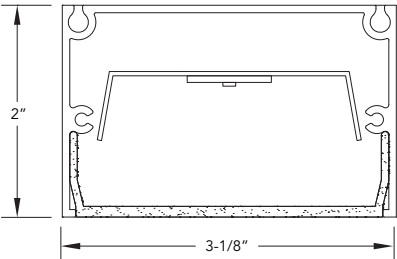

BSS230 -



NOMINAL FIXTURE LENGTH*	CORRELATED COLOR TEMPERATURE	DRIVER	WATTS / FOOT	MOUNT	RUN CONFIGURATION	FINISH
2: 23" 3: 34" 4: 45" 5: 56" 6: 67" 7: 78" 8: 89"	27: 2700K-90+ CRI 30: 3000K-90+ CRI 35: 3500K-90+ CRI 40: 4000K-90+ CRI	ND: non-dimming [Dimming] D: 0-10V, 1% DTR: triac, 1% DLV: electronic low voltage, 1% HES: Lutron EcoSystem, soft-on/fade-to-black, 1% EL: eldoLED ECOdrive 0-10V, 1% ES: eldoLED SOLOdrive 0-10V, 0.1% ELD: eldoLED ECOdrive DALI, 1% ESD: eldoLED SOLOdrive DALI, 0.1%	5: 5 W/ft. 8: 8 W/ft. CF: consult factory for custom output	SM: surface mount C4: cable mount 4' cable length C8: cable mount 8' cable length CF: consult factory for custom mounting	SN: single ST: starter AD: adder TR: terminator	AW: architectural white (semi-matte) WH: white (semi-gloss) BL: black (semi-matte) MB: matte black ESS: environmental satin silver BZ: bronze PR: primer CF: consult factory for custom finish SA: satin anodize (may require additional lead time)

Note: Each fixture includes a remote driver matched for fixture length and light output.
* Actual dimension dependent on run configuration.

BSS230 | **bodhi**

3-1/8" wide LED luminaire with flush lens, remote driver

MOUNTING

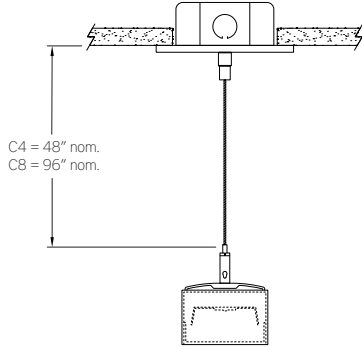	ORDERING CODE	DESCRIPTION
	SM	SURFACE MOUNT • Use appropriate fastener through Ø3/16" holes in housing • 10' low voltage leads exit out the rear at an end
	C4 and C8	CABLE MOUNT Mounting option includes: • Extruded aluminum cable hanger bracket (can be located at nearly any point along fixture length) • Ø 1/16" x 48" (C4) or 96" (C8) aircraft cables • 18 gauge x 60" (C4) or 108" (C8) power cable (in coordinating finish) • Bracket bars • Ø 5" white canopies • Ceiling couplers • Side exit cable grippers

BSS230 | **bodhi**

3-1/8" wide LED luminaire with flush lens, remote driver

LENGTH / MOUNTING DIMENSIONS

Note: Recommended dimensions. Cable hangers are adjustable and can be located at nearly any point along fixture length.


ORDERING CODE	LENGTH A	LENGTH B	LENGTH C	LENGTH D	LENGTH E
2	23"	22-1/2"	22"	17"	19-1/2"
3	34"	33-1/2"	33"	28"	30-1/2"
4	45"	44-1/2"	44"	39"	41-1/2"
5	56"	55-1/2"	55"	50"	52-1/2"
6	67"	66-1/2"	66"	61"	63-1/2"
7	78"	77-1/2"	77"	72"	74-1/2"
8	89"	88-1/2"	88"	83"	85-1/2"

RUN CONFIGURATION INFORMATION


ORDERING CODE	DESCRIPTION
SN	Single
ST	Starter
AD	Adder
TR	Terminator

RUN INFORMATION


Back Plan - Surface Mount Single Fixture Option

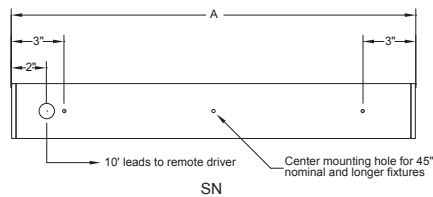

Back Plan - Surface Mount Continuous Run Option

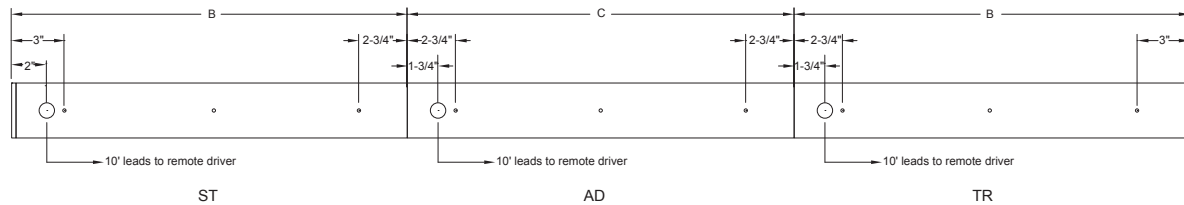

Side View - Cable Mount Single Fixture Option

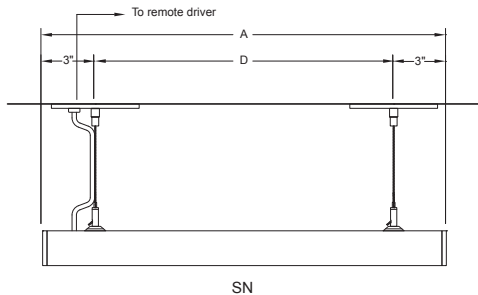

Side View - Cable Mount Continuous Run Option

