


BSS230 | **bodhi**

3-1/8" wide LED luminaire with flush lens, remote driver

Project: _____ Type: _____

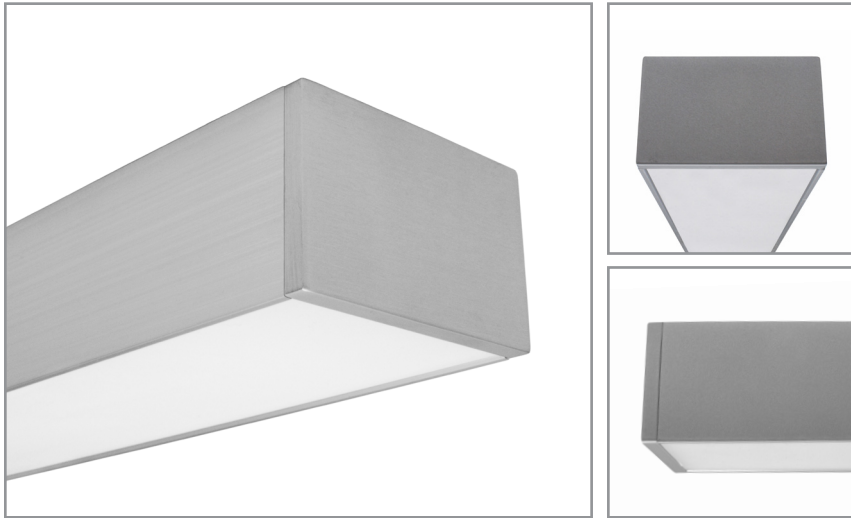

FEATURES

The Bodhi® BSS230 is a low profile, remote driven, linear LED luminaire for general lighting applications. The 2" tall by 3-1/8" wide extruded aluminum housing is capped with a flat lens. 1/4" thick machined aluminum end caps finish off the fixture ends.

SPECIFICATIONS

Fixture constructed of an extruded aluminum housing, extruded, frosted acrylic lens and machined aluminum end caps.

Model variations offered for surface and cable suspended applications.

Field adjustable cable hangers can be located at nearly any point along the fixture length.

Standard finishes as shown below.

Available in nominal lengths of 2'-8' as single fixtures and continuous runs.

Surface mount fixtures wired with 10' low voltage leads.

Included standard remote 120-277V driver offered with 0-10V dimming or non-dim (other dimming driver options available).

Remote mounted emergency battery backup available (ordered separately, consult factory for details).

Standard outputs are 5W and 8W nominal per foot.

LEDs available in 2700K, 3000K, 3500K, and 4000K, within a 3 step MacAdam ellipse, all with 90+ CRI typical.


Life: 50,000 hours L_{70} .

Limited five year warranty.

UL and C-UL listed for dry and damp locations.



SECTION

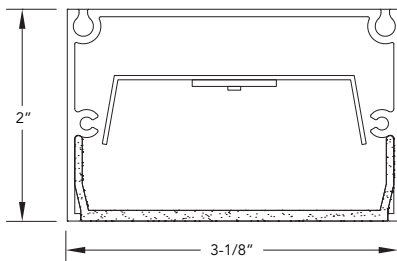

BSS230 -

NOMINAL FIXTURE LENGTH*	CORRELATED COLOR TEMPERATURE	DRIVER	WATTS / FOOT	MOUNT	RUN CONFIGURATION	FINISH
2: 23" 3: 34" 4: 45" 5: 56" 6: 67" 7: 78" 8: 89"	27: 2700K-90+ CRI 30: 3000K-90+ CRI 35: 3500K-90+ CRI 40: 4000K-90+ CRI	ND: non-dimming [Dimming] D: 0-10V, 1% DTR: triac, 1% DLV: electronic low voltage, 1% HES: Lutron EcoSystem, soft-on/fade-to-black, 1% EL: eldoLED ECOdrive 0-10V, 1% ES: eldoLED SOLOdrive 0-10V, 0.1% ELD: eldoLED ECOdrive DALI, 1% ESD: eldoLED SOLOdrive DALI, 0.1%	5: 5 W/ft. 8: 8 W/ft. CF: consult factory for custom output	SM: surface mount C4: cable mount 4' cable length C8: cable mount 8' cable length CF: consult factory for custom mounting	SN: single ST: starter AD: adder TR: terminator	AW: architectural white (semi-matte) WH: white (semi- gloss) BL: black (semi- matte) MB: matte black ESS: environmental satin silver BZ: bronze PR: primer CF: consult factory for custom finish SA: satin anodize (may require additional lead time)



Note: Each fixture includes a remote driver matched for fixture length and light output.

* Actual dimension dependent on run configuration.

BSS230 | **bodhi**

3-1/8" wide LED luminaire with flush lens, remote driver

MOUNTING

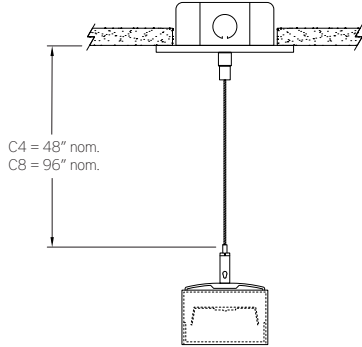	ORDERING CODE	DESCRIPTION
	SM	SURFACE MOUNT • Use appropriate fastener through Ø3/16" holes in housing • 10' low voltage leads exit out the rear at an end
	C4 and C8	CABLE MOUNT Mounting option includes: • Extruded aluminum cable hanger bracket (can be located at nearly any point along fixture length) • Ø 1/16" x 48" (C4) or 96" (C8) aircraft cables • 18 gauge x 60" (C4) or 108" (C8) power cable (in coordinating finish) • Bracket bars • Ø 5" white canopies • Ceiling couplers • Side exit cable grippers

BSS230 | **bodhi**

3-1/8" wide LED luminaire with flush lens, remote driver

LENGTH / MOUNTING DIMENSIONS

Note: Recommended dimensions. Cable hangers are adjustable and can be located at nearly any point along fixture length.


ORDERING CODE	LENGTH A	LENGTH B	LENGTH C	LENGTH D	LENGTH E
2	23"	22-1/2"	22"	17"	19-1/2"
3	34"	33-1/2"	33"	28"	30-1/2"
4	45"	44-1/2"	44"	39"	41-1/2"
5	56"	55-1/2"	55"	50"	52-1/2"
6	67"	66-1/2"	66"	61"	63-1/2"
7	78"	77-1/2"	77"	72"	74-1/2"
8	89"	88-1/2"	88"	83"	85-1/2"

RUN CONFIGURATION INFORMATION


ORDERING CODE	DESCRIPTION
SN	Single
ST	Starter
AD	Adder
TR	Terminator

RUN INFORMATION


Back Plan - Surface Mount Single Fixture Option

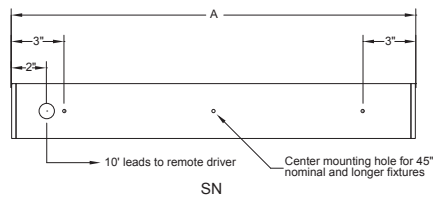

Back Plan - Surface Mount Continuous Run Option

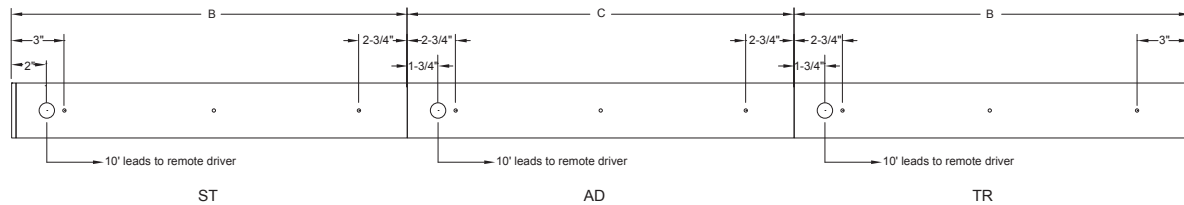

Side View - Cable Mount Single Fixture Option

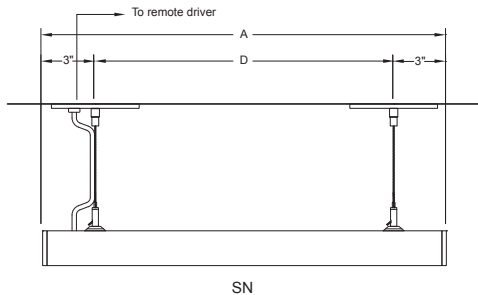

Side View - Cable Mount Continuous Run Option

