BSS532 | TUBULAR

Ø4" suspended adjustable direct/indirect LED luminaire

bartco
VISIONS BROUGHT TO LIGHT™

Project: _____ Type: _____

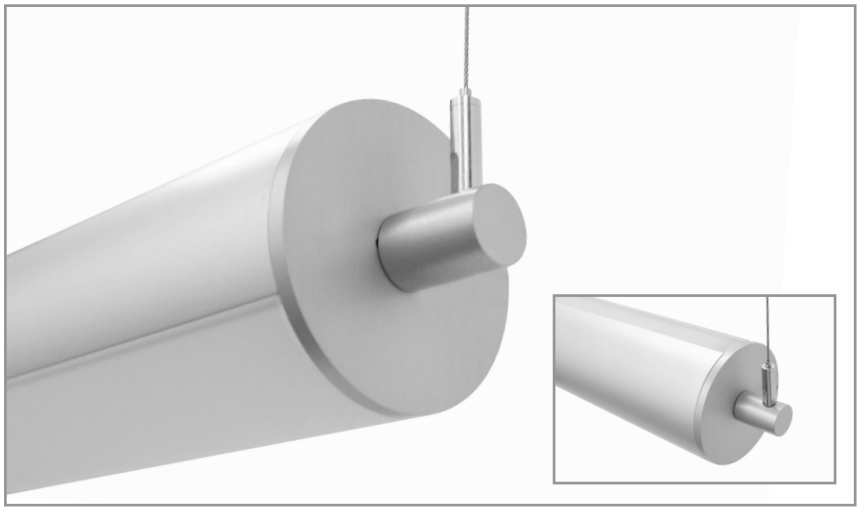

SECTION

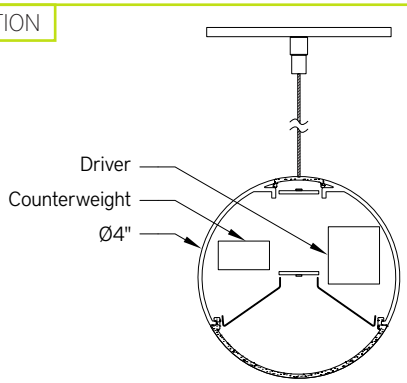

FEATURES

Part of the Tubular series of LED luminaires, the BSS532 is a suspended direct/indirect fixture for general lighting applications. The two apertures in the Ø4" extruded aluminum housing, are fitted with frosted acrylic lenses. The housing can rotate on its machined aluminum cable couplers, providing the ability to aim light in directions other than vertical.

SPECIFICATIONS

Fixture constructed of an extruded aluminum housing, frosted acrylic extruded lenses, machined aluminum end caps and cable couplers.

Cable couplers allow housing rotation of 341°.

Standard finishes as shown below.

Available in nominal cable centers of 2'–8' for single fixtures and continuous runs.

Standard integral 120-277V driver offered with 0-10V dimming or non-dim (other dimming driver options available).

Remote mounted emergency battery backup available (ordered separately, consult factory for details).

Standard outputs are 585 or 745 lumens per foot indirect and 600 or 780 lumens per foot direct.

Available with dual circuiting of indirect and direct light elements and independent Wattage/foot options.

LEDs available in 2700K, 3000K, 3500K and 4000K, within a 3 step MacAdam ellipse, all with 90+ CRI typical.

Life: 50,000 hours L_{70}.

Limited five year warranty.

UL and C-UL listed for dry and damp locations.

PERFORMANCE

Note: All data reflects fixtures with 3500K LEDs

NOMINAL LENGTH	OPTIC CONFIGURATION	OUTPUT	LUMENS/ft.	WATTS/ft.	LUMINAIRE LUMENS	EFFICACY (LPW)
4'	Indirect	L: low	585	5.5	2158	104
		R: regular	745	7.6	2802	97
	Direct	L: low	600	5.6	2269	108
		R: regular	780	7.7	2947	102

BSS532 -

____ - ____ - ____ - ____ - ____ - ____ - ____ - ____ - ____

NOMINAL CABLE CENTER DISTANCE*

2: 25-5/8"
3: 36-5/8"
4: 47-5/8"
5: 58-5/8"
6: 69-5/8"
7: 80-5/8"
8: 91-5/8"

CORRELATED COLOR TEMPERATURE

27: 2700K-90+ CRI
30: 3000K-90+ CRI
35: 3500K-90+ CRI
40: 4000K-90+ CRI

DRIVER

ND: non-dimming

[Dimming]

D: 0-10V, 1%
DTR: triac, 1%
DLV: electronic low voltage, 1%
HES: Lutron EcoSystem, soft-on fade-to-black, 1%
EL: eldoLED ECOdrive 0-10V, 1%
ES: eldoLED SOLOdrive 0-10V, 0.1%
ELD: eldoLED ECOdrive DALI, 1%
ESD: eldoLED SOLOdrive DALI, 0.1%

CIRCUIT

1: single circuit
2: two circuit

INDIRECT LIGHT OUTPUT (lumens /ft.)

L: low – 585
R: regular – 745
CF: consult factory for custom output

DIRECT LIGHT OUTPUT (lumens /ft.)

L: low – 600
R: regular – 780
CF: consult factory for custom output

MOUNT

C4: cable mount 4' cable length
C8: cable mount 8' cable length
CF: consult factory for custom mounting

RUN CONFIGURATION

SN: single
ST: starter
AD: adder
TR: terminator

FINISH

AW: architectural white (semi-matte)
WH: white (semi-gloss)
BL: black (semi-matte)
MB: matte black
ESS: environmental satin silver
BZ: bronze
PR: primer
CF: consult factory for custom finish

SA: satin anodize (may require additional lead time)

* Actual dimension dependent on run configuration.

©2026 Bartco Lighting, Inc. These products are protected by patents and patents pending. Unauthorized use or reproduction of illustrations, photographs or text is prohibited. Bartco Lighting reserves the right to discontinue products or to change the technical and/or design specifications at any time.

MOUNTING

	ORDERING CODE	DESCRIPTION
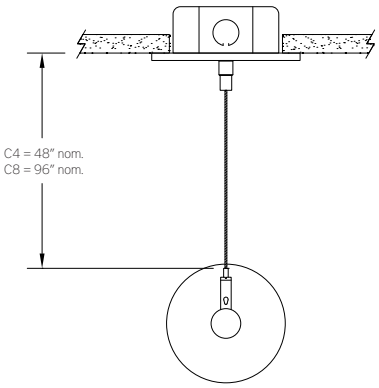	C4 and C8	CABLE MOUNT Mounting option includes: • Ø 1⁄16"x 48" (C4) or 96" (C8) aircraft cables • 60" (C4) or 108" (C8) power cable in coordinating finish • Bracket bars • Ø 5" white canopies • Ceiling couplers • Side exit cable grippers

©2026 Bartco Lighting, Inc. These products are protected by patents and patents pending. Unauthorized use or reproduction of illustrations, photographs or text is prohibited. Bartco Lighting reserves the right to discontinue products or to change the technical and/or design specifications at any time.

BSS532 | TUBULAR

Ø4" suspended adjustable direct/indirect LED luminaire

CABLE CENTER DIMENSIONS

ORDERING CODE	LENGTH A	LENGTH B
2	25-5/8"	25-1/8"
3	36-5/8"	36-1/8"
4	47-5/8"	47-1/8"
5	58-5/8"	58-1/8"
6	69-5/8"	69-1/8"
7	80-5/8"	80-1/8"
8	91-5/8"	91-1/8"

RUN CONFIGURATION INFORMATION

ORDERING CODE	DESCRIPTION
SN	Single
ST	Starter
AD	Adder
TR	Terminator

RUN INFORMATION

Side View - Single Fixture Option

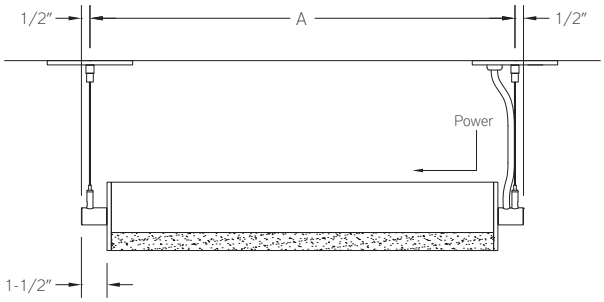

Side View - Continuous Option

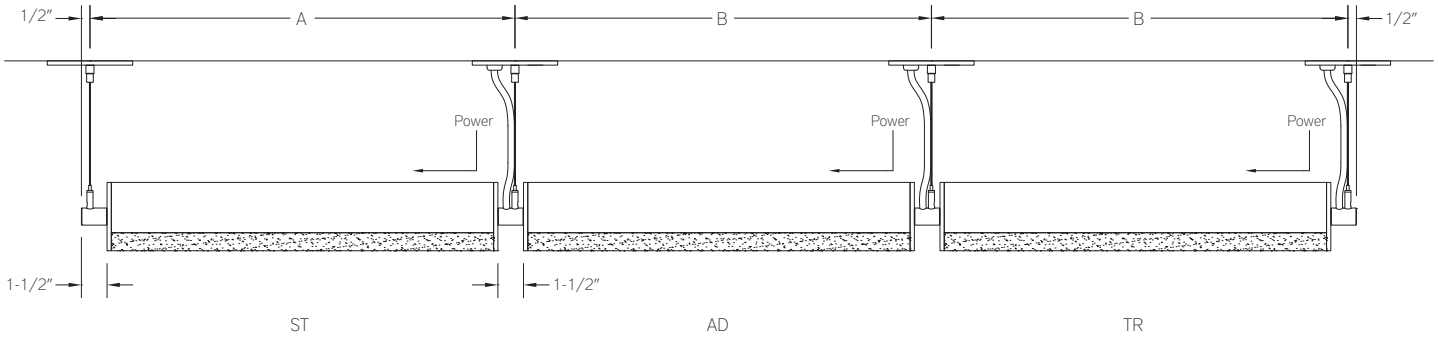

©2026 Bartco Lighting, Inc. These products are protected by patents and patents pending. Unauthorized use or reproduction of illustrations, photographs or text is prohibited. Bartco Lighting reserves the right to discontinue products or to change the technical and/or design specifications at any time.