


## General Note

Specify driver ordering code. Factory will provide a driver matched to the performance requirements of specific fixtures.

## Driver Enclosure

Remote driver supplied in a vented aluminum, surface mount enclosure with ample knockouts. Enclosure dimensions vary depending on the specific driver installed. In some cases, two driver assemblies will be required to operate a luminaire.

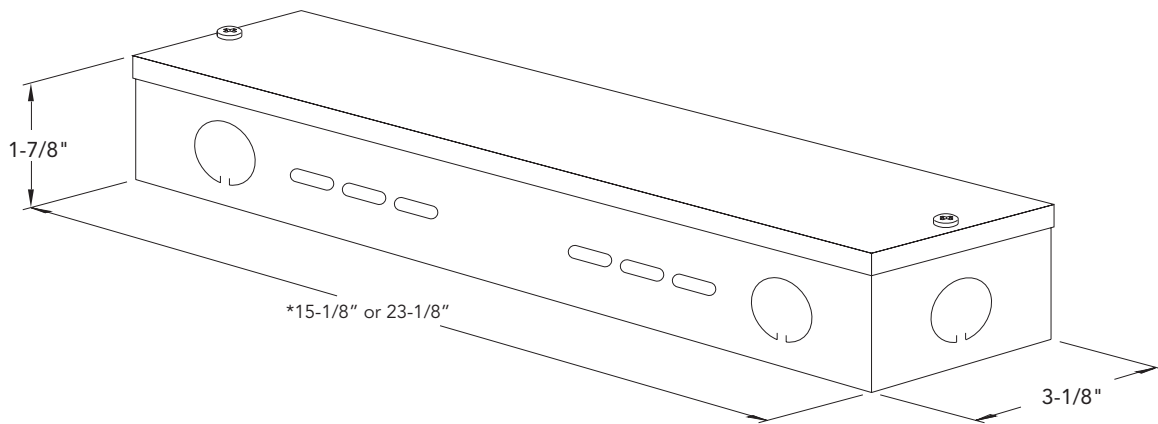

\* Length dependent on specific driver model used

## REMOTE DRIVER OPTIONS

DRIVER TYPE	ORDERING CODE	DRIVER MFG./MODEL	DIMMING METHOD	DIMMING RANGE
Non-dimming	ND	Various	N/A	N/A
Dimming	DM	Various	0-10V	1-100%
	HES	Lutron EcoSystem – soft-on/fade-to-black	EcoSystem smart digital control	1-100%
	H2	Lutron Hi-lume	2-wire forward phase (120V only)	1-100%
	EL	EldoLED – ECOdrive	0-10V	1-100%
	ES	EldoLED – SOLOdrive	0-10V	0.1-100%
	ELD	EldoLED – ECOdrive	DALI	1-100%
	ESD	EldoLED – SOLOdrive	DALI	0.1-100%

Consult factory for other options.

For dimming installations, customer is responsible for compatibility between driver and control system.