

Project: _____ Type: _____



shown with flange trim and flush lens options



Highlighted fields denote QuickShip Options. See complete 7-Day QuickShip Terms and Conditions available at www.bartcolighting.com/quickship-products/. Purchase order must reference "QuickShip".

FEATURES

A member of the Wake series, the BSS440 is a recessed, extruded aluminum linear LED luminaire with 4" wide aperture. Single and continuous run fixtures are available for installation in common grid ceilings or in hard walls and ceilings with flange and trimless variants. Flush or 1" drop frosted acrylic lens options are offered for all mounting configurations. The BSS440 is Controls Capable, being offered with a variety of integrated control options.

Fixture with certain options available for 7-Day QuickShip.

SPECIFICATIONS

Fixture housing and trim elements made of extruded aluminum and 16 ga. sheet aluminum and steel parts.

Model options available for typical 9/16" and 15/16" grid ceilings or hard walls/ceilings with flange and trimless mounting (wall installation requires accessory mounting brackets).

Basic continuous run fixtures provided with 18 ga. wiring harness for 6 Amp maximum load (consult factory for runs requiring multiple circuits, sensor integration, etc.).

Optic options include an acrylic frosted flush or 1" drop lens and flat blade louver.

Standard integral 120-277V driver offered with 0-10V dimming or non-dim (other dimming driver options available).

Integral 120-277V emergency battery backup available for 44"-88" fixtures (supplied with remote test switch/indicator).

Standard light outputs range from 465 – 905 lumens per foot.

LEDs available in 2700K, 3000K, 3500K, and 4000K, within a 3 step MacAdam ellipse, all with 90+ CRI typical.

Life: 50,000 hours L₇₀.

Bartco Lighting Controls Capable fixture available with integrated controls from a variety of suppliers.

Chicago plenum rated option available.


Nominal weight is 3.4 lbs. per foot.

Limited five year warranty.


UL and C-UL listed for dry and damp locations.

SECTIONS


T1: T-grid 9/16"
T2: T-grid 15/16"
(flush lens option shown)



FT: Flange
(drop lens option shown)



TL: Trimless
(flush lens option shown)



PERFORMANCE

Note: All data reflects fixtures with 3500K LEDs

| NOMINAL LENGTH | OPTIC OPTION | OUTPUT | LUMENS/ft. | WATTS/ft. | LUMINAIRE LUMENS | EFFICACY (LPW) |
|----------------|--------------|------------|------------|-----------|------------------|----------------|
| 45" | FLUSH | L: low | 465 | 5.7 | 1733 | 82 |
| | | R: regular | 685 | 7.8 | 2550 | 77 |
| | | H: high | 795 | 10.9 | 2957 | 73 |
| | DROP | L: low | 530 | 5.7 | 1980 | 94 |
| | | R: regular | 690 | 7.8 | 2571 | 88 |
| | | H: high | 905 | 10.9 | 3378 | 83 |



BSS440 -

| | | | | | | |
|---|--|---|---|---|--|--|
| MOUNTING OPTION T1: T-grid 9/16" T2: T-grid 15/16" FT: Flange trim TL: Trimless CF: consult factory for custom mounting | NOMINAL APERTURE LENGTH* 22: 22" 55: 55" 24: 24" 61: 61" 33: 33" 66: 66" 39: 39" 72: 72" 44: 44" 77: 77" 48: 48" 83: 83" 50: 50" 88: 88" | CORRELATED COLOR TEMPERATURE 27: 2700K-90+ CRI 30: 3000K-90+ CRI 35: 3500K-90+ CRI 40: 4000K-90+ CRI | DRIVER ND: non-dimming [Dimming] D: 0-10V, 1% DTR: triac, 1%, (120V ONLY) DLV: electronic low voltage, 1%, (120V ONLY) HES: Lutron EcoSystem, soft-on/fade-to-black, 1% EL: eldoLED ECOdrive 0-10V, 1% ES: eldoLED SOLOdrive 0-10V, 0.1% ELD: eldoLED ECOdrive DALI, 1% ESD: eldoLED SOLOdrive DALI, 0.1% | LIGHT OUTPUT (lumens per foot w/lens option F1) L: low – 465 R: regular – 685 H: high – 795 CF: consult factory for custom output | RUN CONFIGURATION SN: single ST: starter AD: adder TR: terminator OPTIC F1: frosted flush F2: frosted drop L: louver | OPTIONS CP: Chicago plenum ED: emergency driver (44"-88" fixtures) WS1A: Wattstopper FS-205, 100%-0% ‡ WS1B: Wattstopper FS-205, 100%-50% ‡ EN1: Enlighted FS-D22 ‡ ES4: Philips EasySense SNS211 MC ‡ CA1: Casambi CBU-A2D ‡ NL1: nLight RES7 ‡ NL2: nLight RIO ‡ LA1: Lutron Athena A-WN-D01-RF-WH ‡ LA2: Lutron Athena A-WN-D01-OCC-WH ‡ CF: consult factory for custom finish options |
|---|--|---|---|---|--|--|

* Actual dimension dependent on mounting option and run configuration.
 ‡ See Integrated Controls section for driver compatibility information.



MOUNTING

| ORDERING CODE | DESCRIPTION | SPECIFICATIONS |
|---------------|-------------|----------------|
|---------------|-------------|----------------|

T1
T2

T-grid ceiling 9/16"
T-grid ceiling 15/16"



- 16 ga. brackets locate housing onto T-bar and allow 5/8" of vertical adjustment to accommodate various height T-bar
- Housing secured with support wires (by others)
- Exposed flange trim in matte white finish

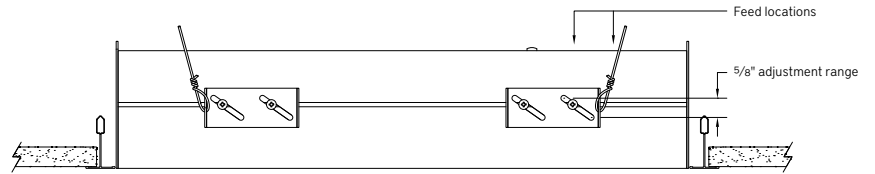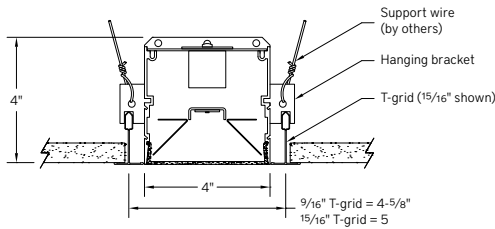

FT

Flange - drywall ceiling or wall


- **For wall installations or special ceiling conditions, order accessory mounting brackets 440-WB**
- 3/4" wide extruded aluminum trim flange in matte white finish
- Housing secured with support wires or 1/4-20 threaded rod (by others)

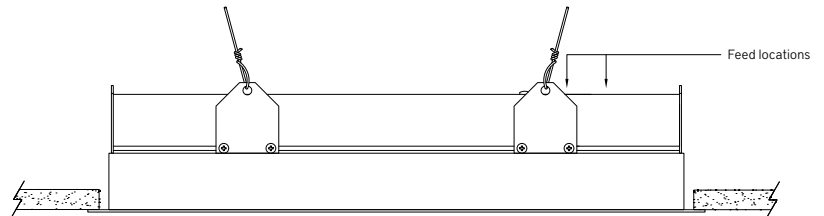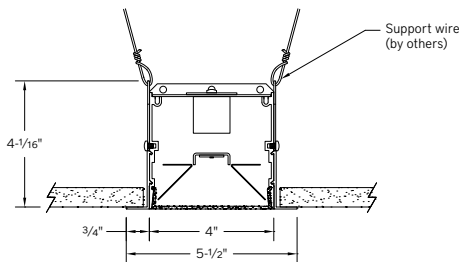



TL

Trimless - drywall ceiling or wall

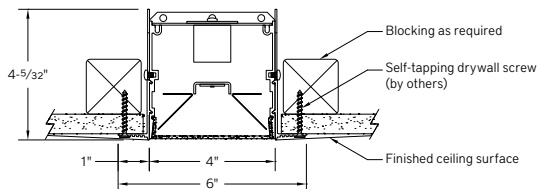
- Installs after 1/2" or 5/8" drywall
- Housing secured with self-tapping drywall screws (by others) into blocking as required



OPTIC

| ORDERING CODE | DESCRIPTION | SPECIFICATIONS |
|---|-----------------------|--|
|  <small>shown with flange trim option</small> | F1 FROSTED FLUSH LENS | 4" W frosted acrylic extrusion |
|  <small>shown with flange trim option</small> | F2 FROSTED DROP LENS | 4" W x 1" H frosted acrylic extrusion with matching acrylic end caps |
| L | LOUVER | 4" W Flat blade louver with $\frac{5}{8}$ " blades at $\frac{7}{8}$ " spacing, formed from sheet steel. Finish is Environmental Satin Silver (consult factory for alternate finishes). Supplied with light diffusion film. |



OPTIONS

| ORDERING CODE | DESCRIPTION | SPECIFICATIONS |
|--|-------------------------|--|
|  <small>Note: remote battery backup available for shorter fixture lengths - ordered separately, consult factory for details.</small> | ED EMERGENCY LED DRIVER | <ul style="list-style-type: none"> • Universal 120-277V input voltage emergency driver delivers initial minimum power of 10W for 90 minutes. • Available for 44"-88" fixtures. • Provided with combination test switch/indicator light for remote mount installation. |

OPTIONS - INTEGRATED CONTROLS

Note: Control options takes up 4" of the overall lens length. For "F1" and "L" optic option, controls are mounted to flush filler piece. For "F2" optic option, controls are mounted to 1" H sheet formed cover.




| | ORDERING CODE | LIGHT OUTPUT SETTING | MODEL | CONTROL PROTOCOL | FUNCTIONS | COMPATIBLE DRIVERS |
|---|---------------|--------------------------|-------------------|--------------------|--|---|
|  | WS1A | 100% – 0% ¹ | FS-205 | N/A | PIR occupancy and light level sensor. | For use with on/off or 0-10V dimming drivers only. |
| | WS1B | 100% – 50% ¹ | | | | |
|  | EN1 | Set during commissioning | FS-D22 | Bluetooth Wireless | PIR occupancy, ambient light sensing, daylight harvesting, and environment monitoring for use within an Enlighted control network. | Provided with Advance sensor ready series 0-10V dimming drivers. |
|  | ES4 | Set during commissioning | SNS211 MC | Bluetooth Wireless | Occupancy, daylight harvesting and task tuning sensor with advance grouping, for use within a MasterConnect network. | Provided with Advance sensor ready series 0-10V dimming drivers. |
|  | CA1 | Set during commissioning | CBU-A2D | Bluetooth Wireless | 0-10V/DALI driver controller, for use within a Casambi ecosystem. | For use with 0-10V or DALI drivers. Consult factory for details. |
|  | NL1 | Set during commissioning | RES7 ² | Radio Wireless | Dimming, PIR occupancy detection and daylight harvesting, for use within an nLight AIR network. | Provided with Advance sensor ready series or eldoLED 0-10V drivers. |
| | NL2 | | RIO ² | | Dimming, for use within an nLight AIR network. | |
|  | LA1 | Set during commissioning | A-WN-D01-RF-WH | Radio Wireless | Dimming only for use with an Athena control system. | Provided with Advance sensor ready series or eldoLED 0-10V or eldoLED DALI-2 drivers. |
| | LA2 | | A-WN-D01-OCC-WH | | Dimming, PIR occupancy and daylight sensor for use with an Athena control system. | |

1. Consult factory for custom light output setting.
 2. Consult your Acuity representative for application-specific model number.

ACCESSORIES

Note: Accessories sold separately
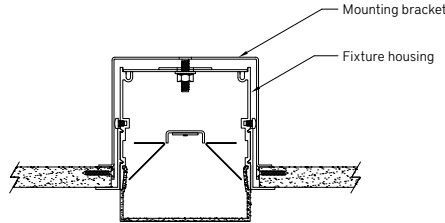
| | ORDERING CODE | DESCRIPTION | SPECIFICATIONS |
|---|---------------|--------------------|--|
|  | 440-WB | WALL MOUNT BRACKET | <ul style="list-style-type: none"> • For use when mounting fixtures with flange or trimless options in walls or restricted ceiling conditions. • 16 ga. bracket clamps fixture to the backside of the mounting surface with provided hardware. • Sold individually; two required for 22"–61" nom. fixtures, three required for 66"–88" nom. fixtures. |

FIXTURE LENGTHS

FOR T-GRID WITH STANDARD 24" AND 48" CENTERS ONLY
SINGLE (SN) CONFIGURATION ONLY


| ORDER CODE | HOUSING LENGTH 9/16" T-GRID | HOUSING LENGTH 15/16" T-GRID |
|------------|--------------------------------|---------------------------------|
| 24 | 23-1/4" | 22-7/8" |
| 48 | 47-1/4" | 46-7/8" |

FOR T-GRID WITH CUSTOM CENTERS OR FLANGE AND TRIMLESS MOUNTING OPTIONS
SINGLE (SN), STARTER (ST), ADDER (AD), TERMINATOR (TR) CONFIGURATIONS


| ORDER CODE | HOUSING LENGTH | ORDER CODE | HOUSING LENGTH |
|------------|----------------|------------|----------------|
| 22 | 22-1/8" | 55 | 55-1/8" |
| 24 | 24-1/8" | 61 | 60-5/8" |
| 33 | 33-1/8" | 66 | 66-1/8" |
| 39 | 38-5/8" | 72 | 71-5/8" |
| 44 | 44-1/8" | 77 | 77-1/8" |
| 48 | 48-1/8" | 83 | 82-5/8" |
| 50 | 49-5/8" | 88 | 88-1/8" |

TO DETERMINE CUSTOM GRID CENTERS FOR T-GRID CEILING MOUNTING

Single Fixtures

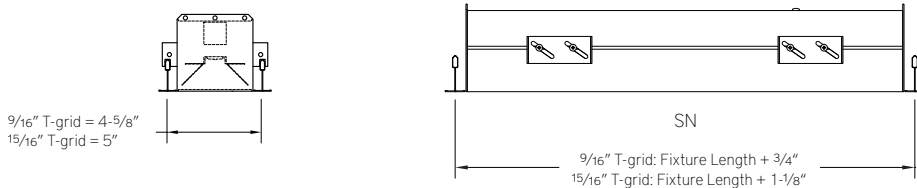


Continuous Runs

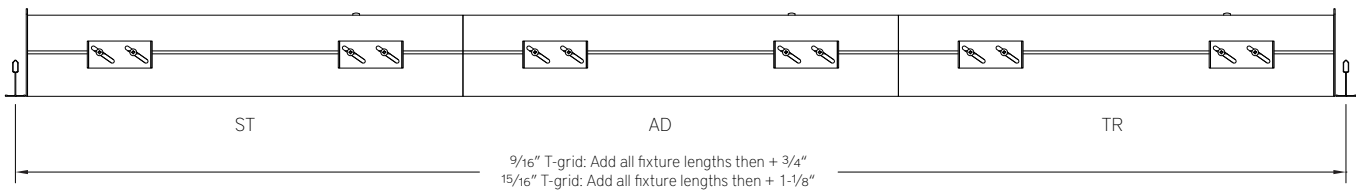

TO DETERMINE WALL / CEILING CUT OUT FOR FLANGE TRIM AND TRIMLESS MOUNTING

Single Fixtures

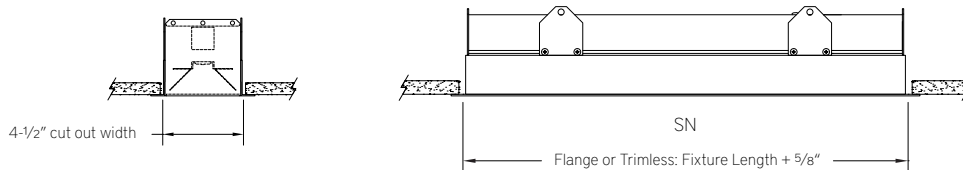

Continuous Runs

