


BSS610 | YOX

2" wide multi-axis direct LED luminaire system

Project: _____ Type: _____

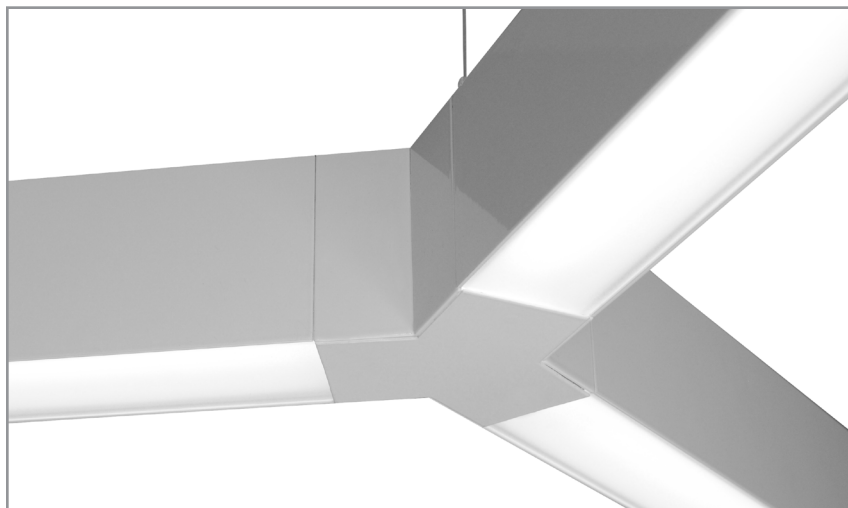

FEATURES

Create an endless variety of multi-directional fixture runs and geometric shapes with the BS610 YoX linear LED system. This luminaire family consists of modular 2" wide by 3" tall extruded aluminum housings and joining modules in Straight, "L", "T", "Y", and "X" configurations. Fixtures can be surface or cable suspended and optioned with a variety of dimming drivers and occupancy sensor.

SPECIFICATIONS

Fixture housings constructed an extruded aluminum housing, extruded, frosted acrylic lens and machined aluminum end caps.

Mounting variations offered for surface or cable suspended applications.

Fixture housings require BSS610-M Joining Modules for mounting and supplying power (specified separately).

Standard finishes as shown below.

Fixture modules available in nominal lengths of 2'-8' and are provided with 18 ga. wiring harnesses (6 Amp max. load) at a suitable length for connecting to adjacent fixtures or power modules (consult factory for runs requiring multiple circuits, sensor integration, etc.).

Standard integral 120-277V driver offered with 0-10V dimming or non-dim (other dimming driver options available).

Integral 120-277V emergency battery backup available for 4'-8' fixtures (remote battery backup available for shorter fixture lengths - ordered separately, consult factory for details).

Standard light outputs are 485, 625 and 825 lumens per foot.


LEDs available in 2700K, 3000K, 3500K and 4000K, within a 3 step MacAdam ellipse, all with 90+ CRI typical.

Life: 50,000 hours L_{70} .

UL and C-UL listed for dry and damp locations.

Limited five year warranty.

SECTION



PERFORMANCE

Note: All data reflects fixtures with 3500K LEDs

NOMINAL LENGTH	OUTPUT	LUMENS/ft.	WATTS/ft.	LUMINAIRE LUMENS	EFFICACY (LPW)
4'	L: low	485	5.6	1795	86
	R: regular	625	7.8	2331	81
	H: high	825	10.8	3063	76



BSS610 -

NOMINAL FIXTURE LENGTH

2: 22-1/8"
3: 33-1/8"
4: 44-1/8"
5: 55-1/8"
6: 66-1/8"
7: 77-1/8"
8: 88-1/8"

CORRELATED COLOR TEMPERATURE

27: 2700K-90+ CRI
30: 3000K-90+ CRI
35: 3500K-90+ CRI
40: 4000K-90+ CRI

DRIVER

ND: non-dimming
[Dimming]
D: 0-10V, 1%
DTR: triac, 1%
DLV: electronic low voltage, 1%
HES: Lutron EcoSystem, soft-on fade-to-black, 1%
EL: eldoLED ECOdrive 0-10V, 1%
ES: eldoLED SOLOdrive 0-10V, 0.1%
ELD: eldoLED ECOdrive DALI, 1%
ESD: eldoLED SOLOdrive DALI, 0.1%

LIGHT OUTPUT (lumens per foot)

L: low – 485
R: regular – 625
H: high – 825
CF: consult factory for custom output

RUN CONFIGURATION

AD: adder
TR: terminator

MOUNT

SM: surface mount
CM: cable mount
CF: consult factory for custom mounting



OPTIONS

ED: emergency driver (44"-88" fixtures)
OC: occupancy sensor (see options section)

FINISH

AW: architectural white (semi-matte)
WH: white (semi-gloss)
BL: black (semi-matte)
MB: matte black
ESS: environmental satin silver
BZ: bronze
PR: primer
CF: consult factory for custom finish

MOUNTING

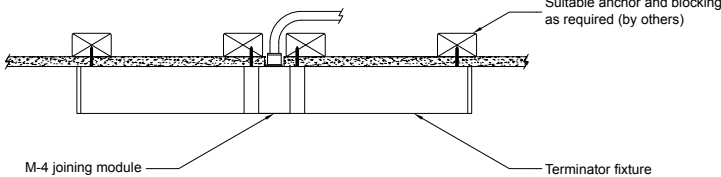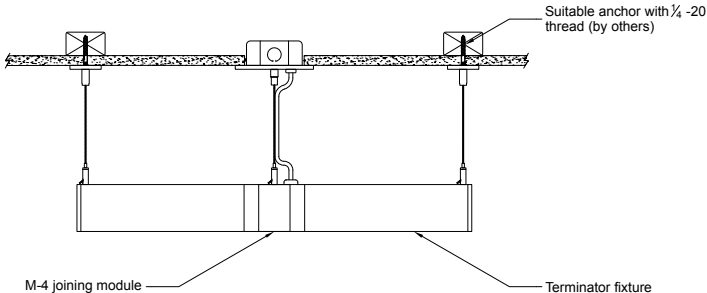		ORDERING CODE	DESCRIPTION
"T" shape shown 		SM	SURFACE MOUNT • Use appropriate fastener through Ø3/16" holes in housing • Power is supplied through an adjacent Joining Module
"T" shape shown 		CM	CABLE MOUNT • Power is supplied through an adjacent cable suspended Joining Module

OPTIONS


ORDERING CODE	DESCRIPTION	SPECIFICATIONS
ED	EMERGENCY LED DRIVER	• Universal 120-277V input voltage emergency driver delivers initial minimum power of 10W for 90 minutes. • Available for 44"-88" fixtures. • Provided with combination test switch/indicator light mounted on housing top for suspended applications or the housing underside for surface mount applications. • Contractor to run necessary wiring through fixture arrays. Note: remote battery backup available for shorter fixture lengths – ordered separately, consult factory for details
OC	OCCUPANCY SENSOR	Passive infrared occupancy sensor with hold-off daylighting adjustment (10-120 foot candles) and time delay adjustment from 30 seconds to 30 minutes. Note: control unit located in fixture housing while optical sensor is mounted to an adjacent Joining Module.

BSS610-M |

Joining modules for BSS610 LED fixture housing

bartco
VISIONS BROUGHT TO LIGHT™

Project: _____ Type: _____

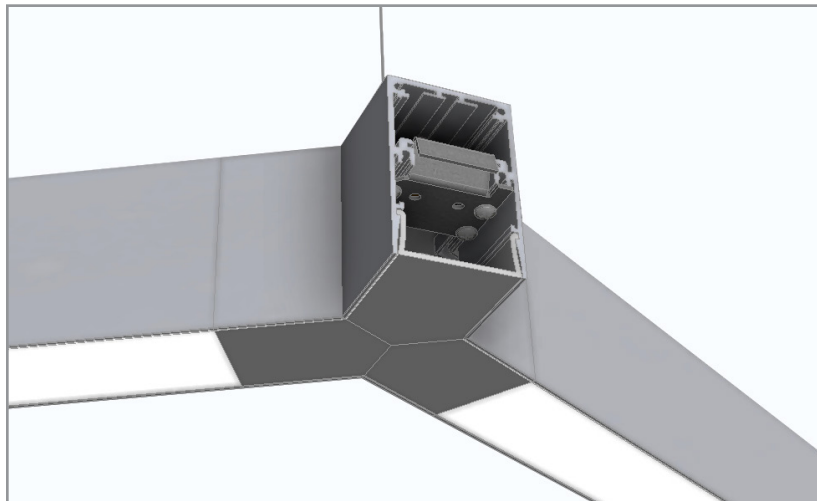

SPECIFICATIONS

Joining Modules constructed an extruded aluminum housing, and machined aluminum end caps.

Standard finishes as shown below.

Modules available in Straight, 90° "L", 90° "T", 90° "X", 120° "L" and 120° "Y" configurations.

Mounting variations offered for surface or cable suspended applications.


Cable suspended modules with the power feed option provided with coordinating (white, metal braided) 18 ga. power cable for load up to 6 Amps.

Passive infrared occupancy sensor available for 3' and longer fixtures.


PLAN

(Cable mount, no power feed shown)


M-2




M-3




M-4




M-5



M-6



M-7



BSS610-M +

MODULE CONFIGURATION

2: straight
3: L – 90°
4: T – 90°
5: X – 90°
6: L – 120°
7: Y – 120°

MOUNT

SM: surface mount
C4: cable mount 4' cable length
C8: cable mount 8' cable length
CF: consult factory for custom mounting

POWER FEED

N: no power
P: power

OPTIONS

S1: occ sensor pos. 1
(see options section)


FINISH

AW: architectural white (semi-matte)
WH: white (semi-gloss)
BL: black (semi-matte)
MB: matte black
ESS: environmental satin silver
BZ: bronze
PR: primer
CF: consult factory for custom finish

MOUNTING

ORDERING CODE


DESCRIPTION

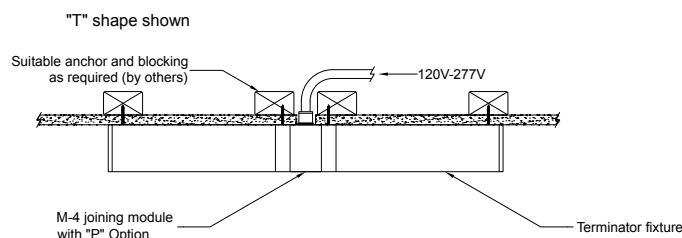

SM

SURFACE MOUNT

Use appropriate fastener through Ø3/16" holes in Joining Module housing

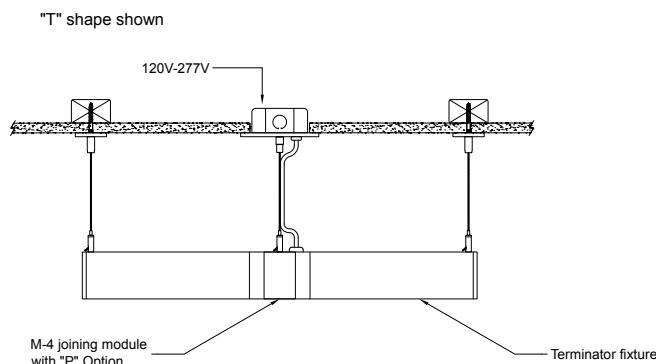

C4
C8

CABLE MOUNT

Mounting option includes:

- Ø 1/16" x 48" (C4) or 96" (C8) aircraft cables
- 18 gauge x 60" (C4) or 102" (C8) SJT power cable (in coordinating finish)
- Bracket bars
- Ø 5" white canopy for "P" power feed option
- Ø 2" white canopy for "N" NO power option
- Ceiling couplers
- Side exit cable grippers

POWER FEED

ORDERING CODE

DESCRIPTION

SPECIFICATIONS

P

With power feed

- SM option Modules: Housing is provided with a Ø7/8" hole on mounting surface.
- CM option Modules: Supplied with 18 gauge x 60" (C4) or 108" (C8) SJT power cable (in coordinating finish) for maximum 6 Amp load and a Ø5" white canopy.

NOTE: When using for emergency lighting, CONSULT FACTORY.

N

NO power feed

- CM option Modules: provided with a Ø2" white canopy.

OPTIONS

ORDERING CODE

DESCRIPTION

SPECIFICATIONS

OCCUPANCY SENSOR

Passive infrared occupancy sensor with hold-off daylighting adjustment (10-120 foot candles) and time delay adjustment from 30 seconds to 30 minutes.

Note: optical sensor is mounted in the Joining Module, while the control unit is mounted in an adjacent fixture housing (specify designated fixture with the "OC" option).

S1

OCCUPANCY SENSOR - POSITION 1


Optical sensor located on the bottom side in the center.

LENGTH/MOUNTING DIMENSIONS

FIXTURE ORDERING CODE	LENGTH A	LENGTH B	LENGTH C
2	22-1/8"	26"	23-5/16"
3	33-1/8"	37"	34-5/16"
4	44-1/8"	48"	45-5/16"
5	55-1/8"	59"	56-5/16"
6	66-1/8"	70"	67-5/16"
7	77-1/8"	81"	78-5/16"
8	88-1/8"	92"	89-5/16"


Note: Cable Center/Mounting Hole Dimensions "B" and "C" are constant, regardless of the Joining Module configuration.

"SM" - Surface Mount Adder Fixture

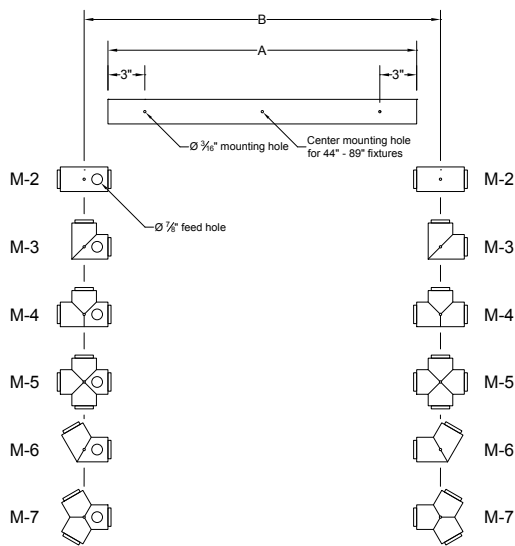


With "P" Power Feed Option

"CM" - Cable Mount Adder Fixture

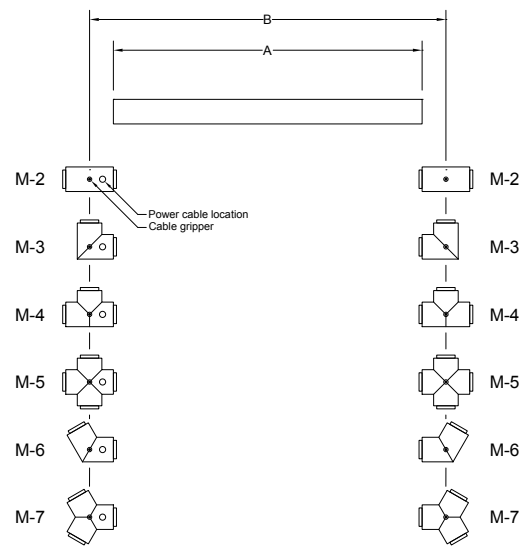


With "P" Power Feed Option

"SM" - Surface Mount Terminator Fixture

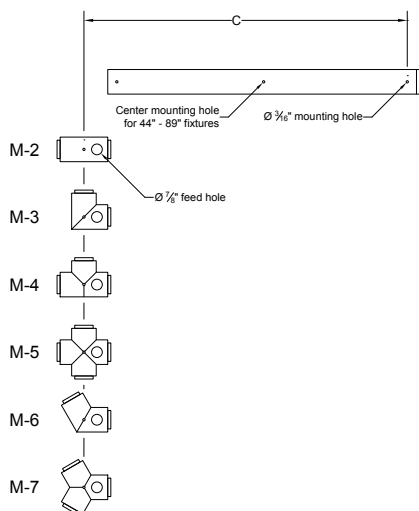

With "P" Power Feed Option

"CM" - Cable Mount Terminator Fixture

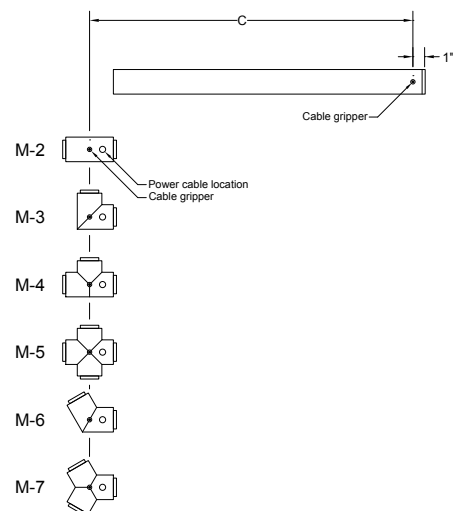

With "P" Power Feed Option

LAYOUT EXAMPLES

Below are a few examples of layouts that can be created with YoX Fixtures and Joining Modules. Use any combination of fixture lengths and module configurations to create unique shapes and designs.

IMPORTANT: Provide finished layout to Bartco Lighting for verification.

To aid in producing layouts, visit bartcoLIGHTING.com/BSS610 for access to CAD blocks.

