


General Note

Specify driver ordering code. Factory will provide a driver matched to the performance requirements of specific fixtures.

Driver Enclosure

Remote driver supplied in a vented aluminum, surface mount enclosure with ample knockouts. Enclosure dimensions vary depending on the specific driver installed. In some cases, two driver assemblies will be required to operate a luminaire.

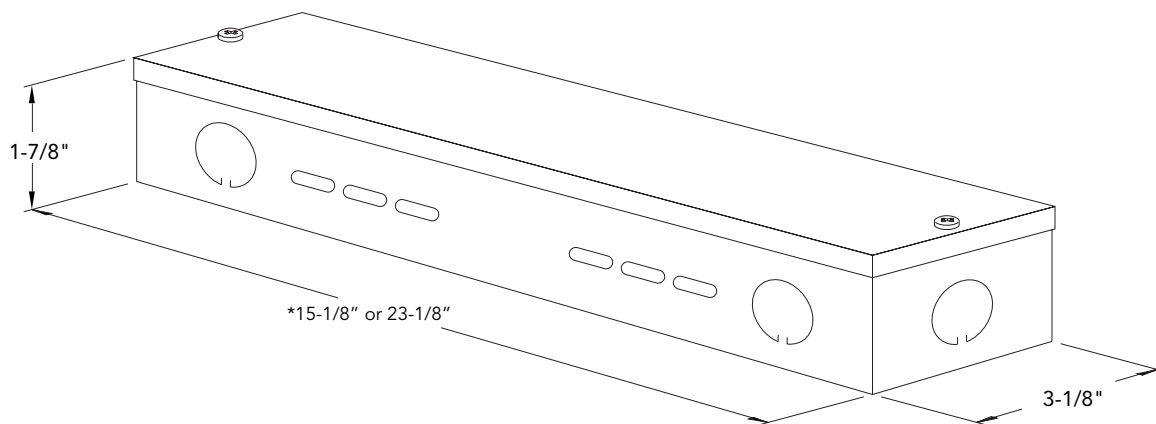

*Length dependent on specific driver model used

REMOTE DRIVER OPTIONS

Consult factory for other options.

DRIVER TYPE	ORDERING CODE	DRIVER MFG./MODEL	DIMMING METHOD	DIMMING RANGE
Non-dimming		Various	NA	
Dimming	DM	Various	0-10V	1-100%
	HE	Lutron EcoSystem	EcoSystem digital	1-100%
	HES	Lutron EcoSystem - soft-on/fade/fade-to-black	EcoSystem digital	1-100%
	H2	Lutron Hi-lume	2-wire forward phase (120V only)	1-100%
	H3	Lutron Hi-lume	3-wire	1-100%
	EL	EldoLED-ECOdrive	0-10V	1-100%

For dimming installations, customer is responsible for compatibility between driver and control system