

BSS255 | bodhi

2" wide direct/indirect LED luminaire



Project: _____ Type: _____



Highlighted fields denote QuickShip Options. See complete 10-Day QuickShip Terms and Conditions available at www.bartcolighting.com/quickship-products/. Purchase order must reference "QuickShip".

FEATURES

The Bodhi series BSS255 is a rectilinear direct/indirect LED luminaire for general lighting applications. The 2" wide by 3-1/2" high extruded aluminum housing is offered for wall or cable suspended mounting. The two LED sources can be configured independently for both switching and lumen output. **Fixture with certain options available for 10-Day QuickShip.**

SPECIFICATIONS

Fixture constructed of extruded aluminum housing, extruded acrylic lenses and machined aluminum end caps

Model variations offered for wall mount and cable suspended applications with multiple optic options

Standard finishes as shown below

Available in nominal lengths of 2'-8' single fixtures and continuous runs

Basic continuous run fixtures provided with 18 ga. wiring harness for 6 Amp maximum load (consult factory for runs requiring multiple circuits, sensor integration, etc.)

Standard integral 120-277V driver offered with 0-10V dimming or non-dim (other dimming driver options available)

Integral 120-277V emergency battery backup available for 4' or 8' nominal, single circuit non-dim or 0-10V (consult factory for all other lengths/drivers)

Standard light outputs range from 470-790 lumens per foot for the direct source and 460 - 740 lumens per foot for the indirect source

LEDs available in 2700K, 3000K, 3500K and 4000K, within a 3 step MacAdam ellipse, all with 90+ CRI typical


Life: 50,000 hours L₇₀

Limited five year warranty

UL and C-UL listed for dry and damp locations



SECTION

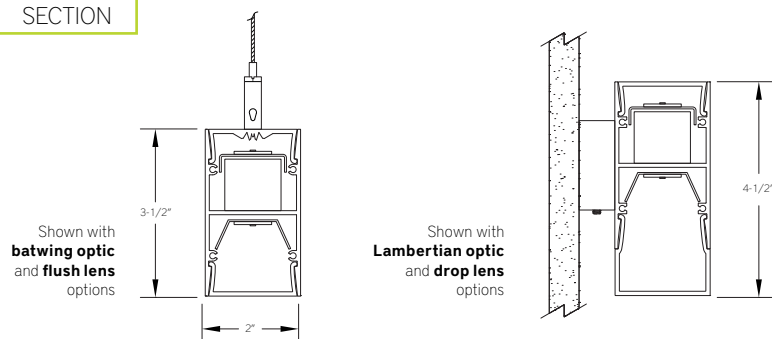

PERFORMANCE

NOMINAL LENGTH	OPTIC CONFIGURATION	OUTPUT	LUMENS/ft.	WATTS/ft.	LUMINAIRE LUMENS	EFFICACY (LPW)
4'	Indirect - Lambertian	L: low	465	5	1738	93
		R: regular	600	7.2	2257	84
	Indirect - batwing	L: low	570	5.7	2112	100
		R: regular	740	7.9	2743	94
	Direct - flush lens	L: low	470	5	1755	94
		R: regular	610	7.2	2279	85

OPTIC CONFIGURATION	OUTPUT	LUMENS/ft.	WATTS/ft.	LUMINAIRE LUMENS	EFFICACY (LPW)
Direct - drop lens, solid end	L: low	500	5	1850	99
	R: regular	650	7.2	2402	90
Direct - flush lens, asymmetric	L: low	580	5.4	2155	108
	R: regular	790	7.6	2933	103



Note: All data reflects fixtures with 3500K LEDs

BSS255 -






* Actual dimension dependent on run configuration.

NOMINAL FIXTURE LENGTH*	DRIVER	INDIRECT LIGHT OUTPUT (lumens per foot w/optic option 1)	INDIRECT OPTIC	MOUNT	OPTIONS	FINISH
2: 22-5/8"	ND: non-dimming		1: general Lambertian distribution	C4: cable mount 4' cable length	ED: emergency driver (4' or 8' SINGLE CIRCUIT, non-dim or 0-10V only)	AW: architectural white (semi-matte)
3: 33-5/8"	D: 0-10V, 1%		2: batwing distribution	C8: cable mount 8' cable length		WH: white (semi-gloss)
4: 44-5/8"	DTR: triac, 1%, (120V ONLY)	L: low - 465		WM: wall mount		BL: black (semi-matte)
5: 55-5/8"	DLV: electronic low voltage, 1%, (120V ONLY)	R: regular - 600		CF: consult factory for custom mounting		MB: matte black
6: 66-5/8"	HES: Lutron EcoSystem, soft-on/fade-to-black, 1%	CF: consult factory for custom output				ESS: environmental satin silver
7: 77-5/8"	EL: eldoLED ECOdrive 0-10V, 1%		DIRECT LIGHT OUTPUT (lumens per foot w/optic option B)			BZ: bronze
8: 88-5/8"	ES: eldoLED SOLOdrive 0-10V, 0.1%		L: low - 500			PR: primer
	ELD: eldoLED ECOdrive DALI, 1%	CIRCUIT	R: regular - 650			CF: consult factory for custom finish
	ESD: eldoLED SOLOdrive DALI, 0.1%	1: single circuit	CF: consult factory for custom output			SA: satin anodize (may require additional lead time)
		2: two circuit (4' nom. length and longer)				
CORRELATED COLOR TEMPERATURE				DIRECT OPTIC	RUN CONFIGURATION	
27: 2700K-90+ CRI				A: flush lens	SN: single	
30: 3000K-90+ CRI				B: drop lens - solid end	ST: starter	
35: 3500K-90+ CRI				C: drop lens - luminous end	AD: adder	
40: 4000K-90+ CRI				D: louver (4' and 8' only)	TR: terminator	
				E: flush lens - asymmetric distribution		

INDIRECT OPTIC OPTION


ORDERING CODE	DESCRIPTION	SPECIFICATIONS
	1 LAMBERTIAN DISTRIBUTION	Frosted extruded acrylic lens for general Lambertian distribution
	2 BATWING DISTRIBUTION	Clear extruded acrylic with wide distribution optic features

DIRECT OPTIC OPTION

ORDERING CODE	DESCRIPTION	SPECIFICATIONS
	A FLUSH LENS	Flush frosted acrylic extrusion
	B DROP LENS - SOLID END	1" H frosted acrylic extrusion with full height aluminum end cap
	C DROP LENS - LUMINOUS END	1" H frosted acrylic extrusion with matching acrylic end cap
	D LOUVER	Parabolic louver with 5/8" blades at 1" spacing, formed from diffuse, high reflectance aluminum and supplied with light diffusion film. Available for 4' and 8' nominal length fixtures.
	E FLUSH LENS - ASYMMETRIC DISTRIBUTION	Flush frosted acrylic extrusion for direct asymmetric distribution

BSS255 | **bodhi**

2" wide direct/indirect LED luminaire

MOUNTING		ORDERING CODE	DESCRIPTION
	C4 and C8	CABLE MOUNT	<p>Mounting option includes:</p> <ul style="list-style-type: none">• Ø 1/16"x 48" (C4) or 96" (C8) aircraft cables• 60" (C4) or 108" (C8) power cable in coordinating finish• Bracket bars• Ø 5" white canopies• Ceiling couplers• Side exit cable grippers <p>NOTE: WHEN DUAL CIRCUIT OPTION IS USED, TWO POWER CABLES ARE REQUIRED</p>
	WM	WALL MOUNT	<p>Mounting option includes:</p> <ul style="list-style-type: none">• 1-7/8"H x 2-1/2"W aluminum bracket projects the fixture housing 3/4" from the wall surface

OPTIONS		ORDERING CODE	DESCRIPTION	SPECIFICATIONS
ED	EMERGENCY LED DRIVER			<ul style="list-style-type: none">• Universal 120-277V input voltage emergency driver delivers initial minimum power of 10W for 90 minutes• Available for SINGLE CIRCUIT 4' or 8' nominal length non-dim or 0-10V fixture and direct light source only (consult factory for all other lengths/drivers)

BSS255 | **bodhi**

2" wide direct/indirect LED luminaire

LENGTH/MOUNTING DIMENSIONS


ORDERING CODE	LENGTH A	LENGTH B	LENGTH C	LENGTH D	LENGTH E
2	22-5/8"	22-3/8"	22-1/8"	21-1/8"	21-5/8"
3	33-5/8"	33-3/8"	33-1/8"	32-1/8"	32-5/8"
4	44-5/8"	44-3/8"	44-1/8"	43-1/8"	43-5/8"
5	55-5/8"	55-3/8"	55-1/8"	54-1/8"	54-5/8"
6	66-5/8"	66-3/8"	66-1/8"	65-1/8"	65-5/8"
7	77-5/8"	77-3/8"	77-1/8"	76-1/8"	76-5/8"
8	88-5/8"	88-3/8"	88-1/8"	87-1/8"	87-5/8"

RUN CONFIGURATION INFORMATION


ORDERING CODE	DESCRIPTION
SN	Single
ST	Starter
AD	Adder
TR	Terminator

RUN INFORMATION


Plan - Wall Mount Single Fixture Option

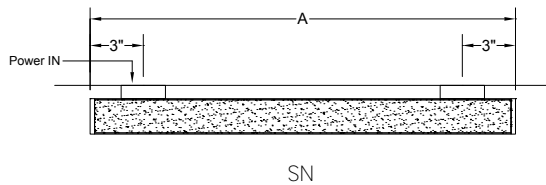

Plan - Wall Mount Continuous Run Option

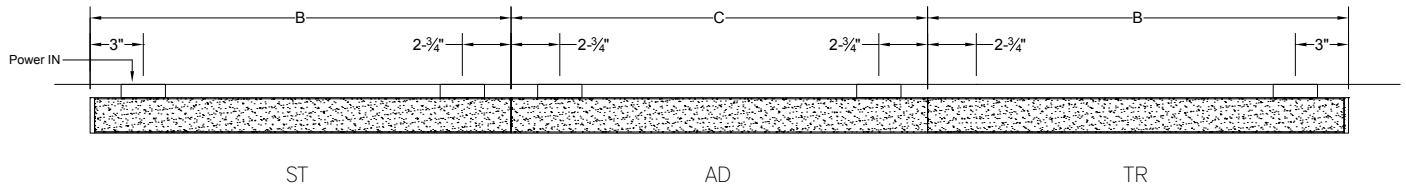

Side View - Cable Suspended Single Fixture Option

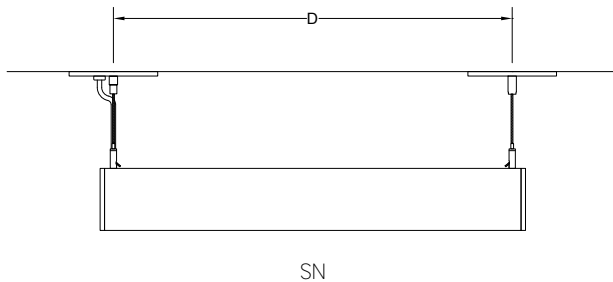

Side View - Cable Suspended Continuous Run Option

