


SK21 | TASK

Ø13/16" 120V or 277V dimmable plug-and-play LED luminaire

Project: _____ Type: _____

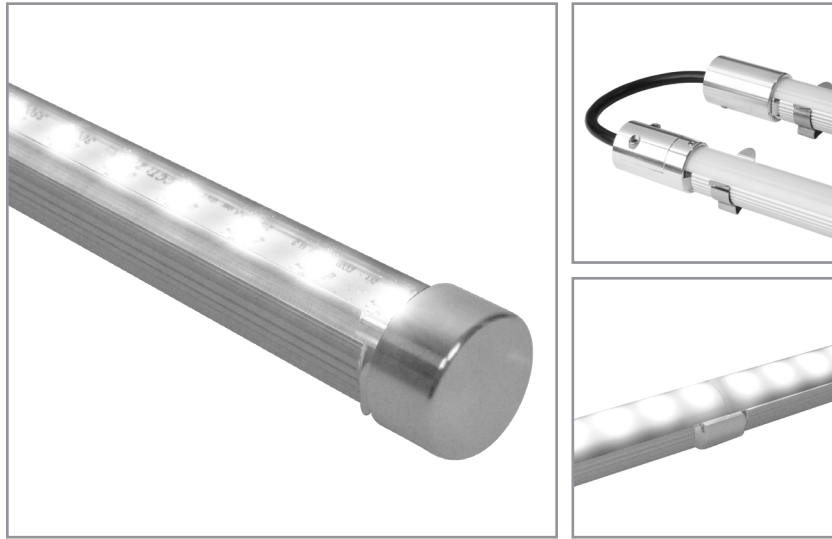

FEATURES

The proprietary BSK21 is a miniature linear, 120V or 277V line voltage LED luminaire that mounts, powers and aims with great ease. The extruded aluminum fixture mounts with a pair of small spring clips. For non-dimming operation, fixtures are powered by plugging in a grounded power cord. A plug-in hardwire adaptor enables fixtures to dim to 5% with 0-10V controls. Seamless, luminous runs up to 40' are achieved by joining fixtures with end-to-end quick connects. Accessory jumper cables are available for installations requiring fixtures to be physically separated. The SK21 is available in five lengths with four color temperatures and 95 CRI LEDs.

- BENEFITS:**
- Modular with quick connects
 - Simple, robust connections
 - Seamless row mount up to 40 feet
 - Uniform luminance throughout connections
 - Effortless dimming integration
 - Flexible for corners and direction changes

SPECIFICATIONS

Fixture constructed of an extruded aluminum housing in satin anodize finish, white or clear polycarbonate lens and male/female interconnects.

Available in nominal lengths of 1'-5' for single fixture use or continuous runs.

Single and Starter fixtures provided with a cord and plug for non-dimming applications or hardwire adapter for dimming applications and a power termination cap.

Adder fixtures provided with a machined aluminum seam cover to conceal the joint between fixtures and carry the electrical ground.

Integral 120V or 277V driver offered with 0-10V dimming down to 5% or non-dim.

Fixtures can join directly end to end for continuous runs or be separated with 6" or 12" accessory interconnect cables.

Maximum luminous run length is 40' with any combination of fixture lengths.

Mounting accomplished with included, screw mount accessory spring clips, which enables 360° aiming.

Regular light output is 250 or 350 lumens per foot, depending on lens.

LEDs available in 2700K, 3000K, 3500K and 4000K, within a 3 step MacAdam ellipse, all with 95 CRI typical.

Life: 40,000 L₇₀ hours at 40°C ambient.

Five year limited warranty


UL and C-UL listed for dry and damp surface mount and portable locations.

Assembled in U.S.A.




E346103 / E358105

END VIEW

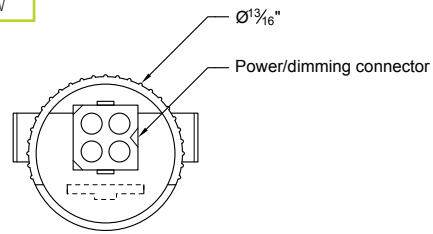

POWER

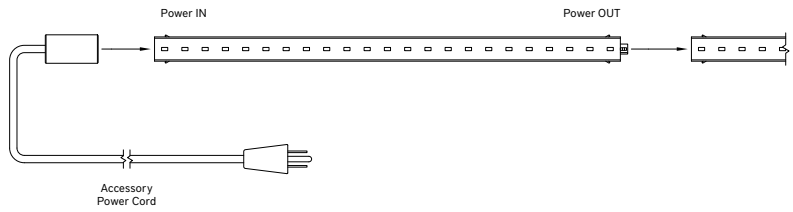

PERFORMANCE

Note: All data reflects fixtures with 3500K LEDs

NOMINAL LENGTH	LENS	OUTPUT	LUMENS/ft.	WATTS/ft.	LUMINAIRE LUMENS	EFFICACY (LPW)
4'	white	R: regular	250	3.5	951	71
	clear		325	3.5	1226	93

SK21 -




NOMINAL FIXTURE LENGTH*	CORRELATED COLOR TEMPERATURE	VOLTAGE	DRIVER	OUTPUT	LENS	CONFIGURATION	FINISH
1: 14-5/16"	27: 2700K-95 CRI	120: 120 V	ND: non-dimming	L: low	F: white polycarbonate	PTS: single or starter fixture w/power cord	SA: satin anodize
2: 21-7/16"	30: 3000K-95 CRI	277: 277V	D: 0-10V dimming, 5%	R: regular	C: clear polycarbonate	SMS: single or starter fixture w/hardwire adapter	
3: 33-1/4"	35: 3500K-95 CRI			H: high		ADD: adder fixture	
4: 45-1/8"	40: 4000K-95 CRI						
5: 56-15/16"							

* Actual dimension dependent on run configuration


SK21 | TASK

Ø13/16" 120V or 277V dimmable plug-and-play LED luminaire

RUN CONFIGURATION

	ORDERING CODE	SPECIFICATIONS
	PTS	<ul style="list-style-type: none"> • Single or Starter fixture provided with a plug-in, 6' black grounded power cable. • Includes machined aluminum power termination cap. • Includes one pair of screw mount spring clips. • Not available for 277V or dimming applications.
	SMS	<ul style="list-style-type: none"> • Single or Starter fixture provided with a plug-in machined aluminum hardwire adapter. • Adapter is wired with 10' leads for dimming (for non-dimming applications, cap dimming leads). • Includes machined aluminum power termination cap. • Includes one pair of screw mount spring clips.
	ADD	<ul style="list-style-type: none"> • Adder fixture provided with installed male and female quick connects. • Includes one machined aluminum seam cover (required for grounding purposes) • Includes one pair of screw mount spring clips.

MOUNTING

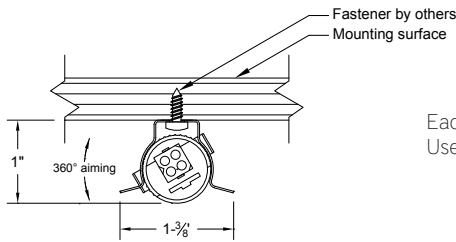


Each fixture is provided with one pair of screw mount spring clips. Use appropriate fastener through 5/32" hole.


ACCESSORIES

Note: Accessories ordered separately

MOUNTING CLIP | Spring steel clips with zinc finish - TWO CLIPS REQUIRED FOR EACH SK21 FIXTURE

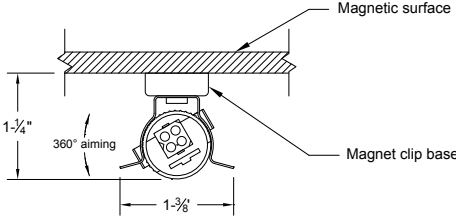	ORDERING CODE	DESCRIPTION
	SK-MC2	<p>MAGNETIC BASE SPRING CLIP</p> <ul style="list-style-type: none"> • Attach clips to magnetic surfaces.

INTERCONNECT CABLES | Small diameter cable with black jacket and machined aluminum sleeves, for use with 0-10V dimming or non-dimming fixtures

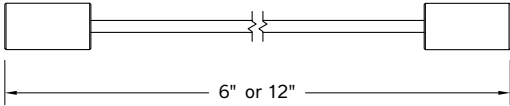	ORDERING CODE	DESCRIPTION
	SK21-PT-IC-06 SK21-PT-IC-12	6" male to female interconnect cable 12" male to female interconnect cable
Note: Maximum run length is 40' with any combination of SK21 fixture lengths		

SK21 | TASK

Ø13/16" 120V or 277V dimmable plug-and-play LED luminaire



LENGTH/MOUNTING DIMENSIONS

ORDERING CODE	LENGTH A	LENGTH B	LENGTH C	LENGTH D
1	13-1/2"	13-11/16"	14-3/32"	13-7/8"
2	20-5/8"	20-13/16"	21-7/32"	21"
3	32-7/16"	32-5/8"	33-1/32"	32-13/16"
4	44-9/32"	44-15/32"	44-7/8"	44-21/32"
5	56-3/32"	55-7/8"	56-11/16"	56-15/32"

RUN INFORMATION

Note: Maximum illuminated run length is 40' with any combination of SK21 fixtures.
SK21-MC mounting clips not illustrated but can be mounted where desired along the fixture length.

Single Fixture

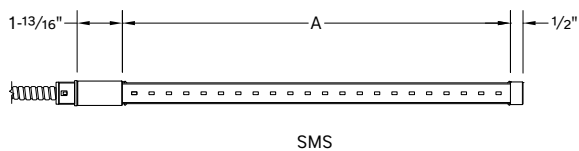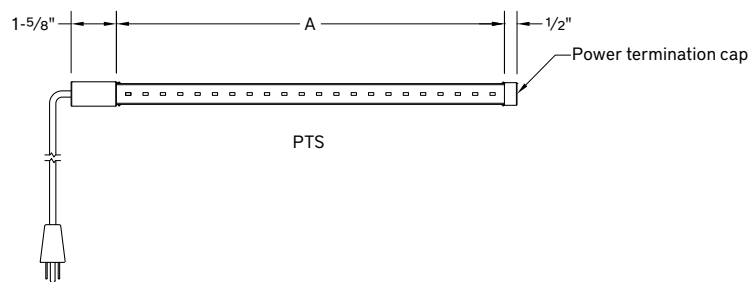

Continuous Run

