

BSS208 | **bodhi**

2" wide LED luminaire with flush lens

Project: _____ Type: _____



Highlighted fields denote QuickShip Options. See complete 10-Day QuickShip Terms and Conditions available at www.bartcolighting.com/quickship-products/. Purchase order must reference "QuickShip".

FEATURES

The BSS208 is a linear LED luminaire for general lighting applications. The 2" wide by 3" tall extrusion is fitted with a flush, frosted lens and machined aluminum end caps. Surface, cable or wall mounting options are available, as well as a variety of dimming drivers and light outputs, to maximize the versatility of this clean design luminaire. Fixture with certain options available for 10-Day QuickShip.

SPECIFICATIONS

Fixture constructed of an extruded aluminum housing, extruded, frosted acrylic lens and machined aluminum end caps

Model variations offered for surface, wall mount and cable suspended applications with Lambertian and Asymmetric distribution options

Standard finishes as shown below

Available in nominal lengths of 2'–8' single fixtures and continuous runs

Basic continuous run fixtures provided with 18 ga. wiring harness for 6 Amp maximum load (consult factory for runs requiring multiple circuits, sensor integration, etc.)

Standard integral 120-277V driver offered with 0-10V dimming or non-dim (other dimming driver options available)

Integral 120-277V emergency battery backup available for 4' nominal non-dim or 0-10V (consult factory for all other lengths/drivers)

Standard light outputs range from 485 to 1200 lumens per foot, depending on optic option

LEDs available in 2700K, 3000K, 3500K and 4000K, within a 3 step MacAdam ellipse, all with 90+ CRI typical

Passive infrared occupancy sensor and parabolic louver available


Life: 50,000 hours L₇₀

Limited five year warranty

UL and C-UL listed for dry and damp locations



SECTION



PERFORMANCE

Note: All data reflects fixture with 3500K LEDs and Lambertian distribution option

NOMINAL LENGTH	OPTIC OPTION	OUTPUT	LUMENS/ft.	WATTS/ft.	LUMINAIRE LUMENS	EFFICACY (LPW)
4'	Lambertian	L: low	485	5.6	1795	86
		R: regular	625	7.8	2331	81
		H: high	825	10.8	3063	76
	Asymmetric - Direct	L: low	580	5.4	2155	108
		R: regular	790	7.6	2933	103
		H: high	1200	12.4	4454	97


BSS208 -

NOMINAL FIXTURE LENGTH* 2: 22-5/8" 3: 33-5/8" 4: 44-5/8" 5: 55-5/8" 6: 66-5/8" 7: 77-5/8" 8: 88-5/8"	CORRELATED COLOR TEMPERATURE 27: 2700K-90+ CRI 30: 3000K-90+ CRI 35: 3500K-90+ CRI 40: 4000K-90+ CRI	DRIVER ND: non-dimming [Dimming] D: 0-10V, 1% DTR: triac, 1%, (120V ONLY) DLV: electronic low voltage, 1%, (120V ONLY) HES: Lutron EcoSystem, soft-on/fade-to-black, 1% EL: eldoLED ECOdrive 0-10V, 1% ES: eldoLED SOLOdrive 0-10V, 0.1% ELD: eldoLED ECOdrive DALI, 1% ESD: eldoLED SOLOdrive DALI, 0.1%	LIGHT OUTPUT (lumens per foot w/optic option 1) L: low – 485 R: regular – 625 H: high – 825 CF: consult factory for custom output	MOUNT SM: surface mount WD: wall mount – direct WI: wall mount – indirect C4: cable mount 4' cable length C8: cable mount 8' cable length	RUN CONFIGURATION SN: single ST: starter AD: adder TR: terminator	FINISH AW: architectural white (semi-matte) WH: white (semi-gloss) BL: black (semi-matte) MB: matte black ESS: environmental satin silver BZ: bronze PR: primer CF: consult factory for custom finish
				OPTIC 1: Lambertian 2: Asymmetric-Direct ‡	OPTIONS ED: emergency driver (4' non-dim or 0-10V only) S1A: occ sensor pos.1, 100%–0% (see options section) S1B: occ sensor pos.1, 100%–50% (see options section) L: louver (4' and 8' ONLY)	SA: satin anodize (may require additional lead time)



* Actual dimension dependent on run configuration and sensor option.

‡ Asymmetric-Direct distribution option applies to SM, WD, C4 and C8 mounting only.





OPTIC OPTION

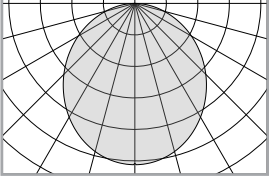ORDERING CODE	DESCRIPTION	SPECIFICATIONS
	1 LAMBERTIAN DISTRIBUTION	Frosted extruded acrylic lens for general Lambertian distribution
	2 ASYMMETRIC – DIRECT	Frosted extruded acrylic lens for asymmetric distribution in direct orientations <i>(not available for WI mounting option)</i>

OPTIONS

ORDERING CODE	DESCRIPTION	SPECIFICATIONS
ED	EMERGENCY LED DRIVER	<ul style="list-style-type: none"> • Universal 120-277V input voltage emergency driver delivers initial minimum power of 10W for 90 minutes • Available for 4' nominal length non-dim or 0-10V fixture only (consult factory for all other lengths/drivers) • Indicator/test switch located on the top for C4/C8 mount and on the side at an end for SM mount
	OCCUPANCY SENSOR	<ul style="list-style-type: none"> • Passive infrared occupancy sensor with hold-off daylighting adjustment (10-120 foot candles) and time delay adjustment from 30 seconds to 30 minutes • Light aperture length reduced by 4" • Consult factory for custom output
	S1A Occupancy sensor – position 1, 100% – 0% S1B Occupancy sensor – position 1, 100% – 50%	Sensor located on the top at an end, with 100% – 0% light output setting Sensor located on the top at an end, with 100% – 50% light output setting
	L LOUVER	<ul style="list-style-type: none"> • Parabolic louver with 5/8" blades at 1" spacing, formed from diffuse, high reflectance aluminum and supplied with light diffusion film • Available for 4' and 8' nominal length fixtures

MOUNTING

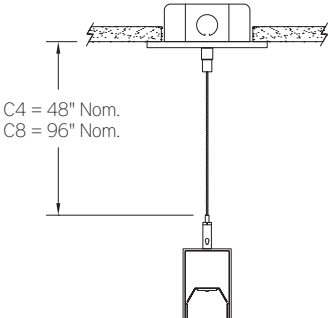	ORDERING CODE	DESCRIPTION
	SM	<p>SURFACE MOUNT</p> <p>Use appropriate fastener through $\text{Ø}3/16''$ holes in housing</p>
	WD	<p>WALL MOUNT - DIRECT ORIENTATION</p> <p>Mounting option includes:</p> <ul style="list-style-type: none"> • 1-7/8" H x 2-1/2" W aluminum bracket projects the fixture housing 3/4" from the wall surface
	WI	<p>WALL MOUNT - INDIRECT ORIENTATION</p> <p>Mounting option includes:</p> <ul style="list-style-type: none"> • 1-7/8" H x 2-1/2" W aluminum bracket projects the fixture housing 3/4" from the wall surface
	C4 and C8	<p>CABLE MOUNT</p> <p>Mounting option includes:</p> <ul style="list-style-type: none"> • $\text{Ø} 1/16'' \times 48''$ (C4) or $96''$ (C8) aircraft cables • 60" (C4) or 108" (C8) power cable (in coordinating finish) • Bracket bars • $\text{Ø} 5''$ white canopies • Ceiling couplers • Side exit cable grippers


LENGTH / MOUNTING DIMENSIONS | **RUN CONFIGURATION INFORMATION**

ORDERING CODE	LENGTH A	LENGTH B	LENGTH C	LENGTH D	LENGTH E
2	22-5/8"	22-3/8"	22-1/8"	16-5/8"	19-3/8"
3	33-5/8"	33-3/8"	33-1/8"	27-5/8"	30-3/8"
4	44-5/8"	44-3/8"	44-1/8"	38-5/8"	41-3/8"
5	55-5/8"	55-3/8"	55-1/8"	49-5/8"	52-3/8"
6	66-5/8"	66-3/8"	66-1/8"	60-5/8"	63-3/8"
7	77-5/8"	77-3/8"	77-1/8"	71-5/8"	74-3/8"
8	88-5/8"	88-3/8"	88-1/8"	82-5/8"	85-3/8"

ORDERING CODE	DESCRIPTION
SN	Single
ST	Starter
AD	Adder
TR	Terminator


RUN INFORMATION

Back Plan - Surface Mount Single Fixture Option

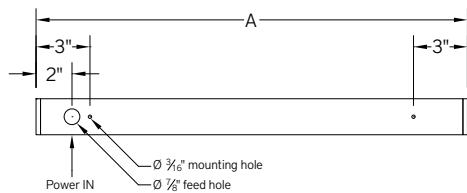

SN

Back Plan - Surface Mount Continuous Run Option

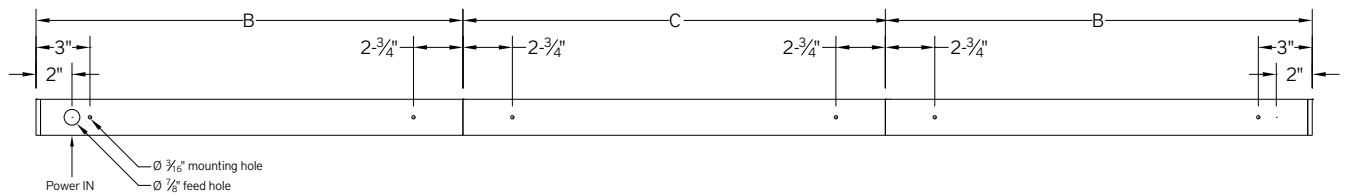


ST

AD


TR

Plan - Wall Mount Single Fixture Option

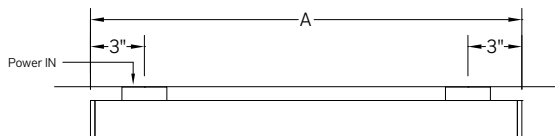

SN

Plan - Wall Mount Continuous Fixture Option

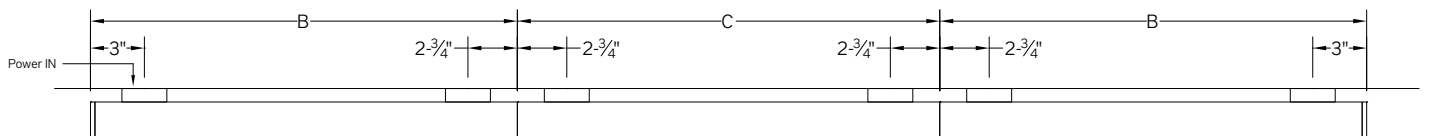

ST

AD


TR

BSS208 | **bodhi**

2" wide LED luminaire with flush lens


RUN INFORMATION

Side View - Cable Mount Single Fixture Option

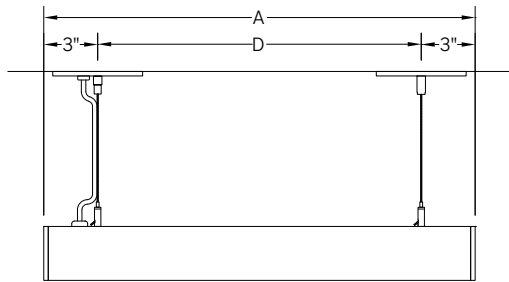

SN

Side View - Cable Mount Continuous Run Option

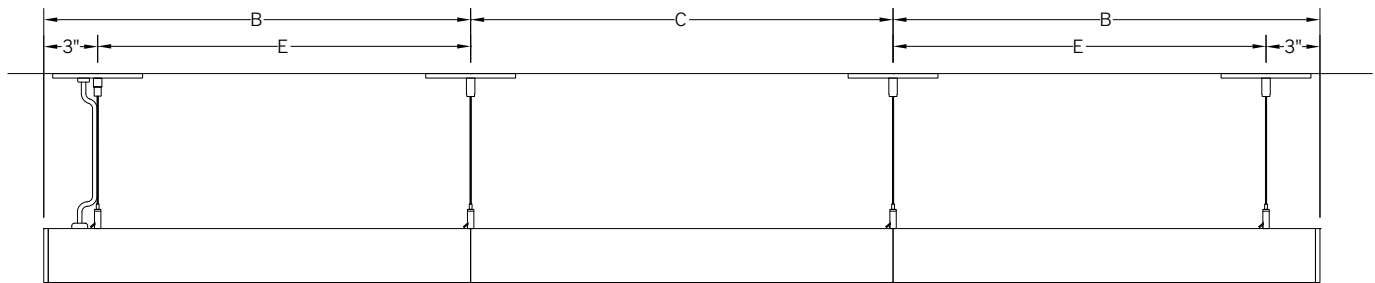

ST

AD

TR