


2" wide aperture LED luminaire with flush lens, wood or steel cladding

Project: _____ Type: _____



SECTION

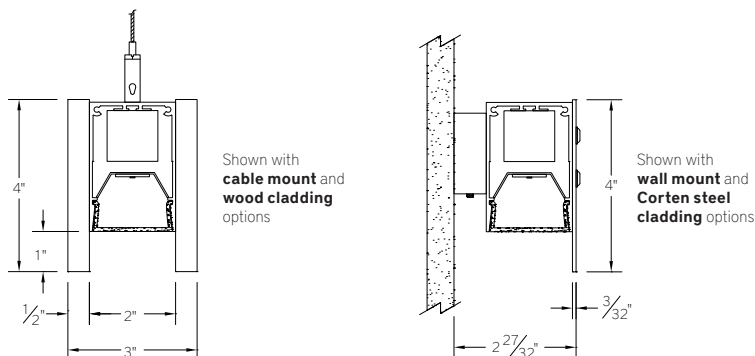

PERFORMANCE

Note: All data reflects fixtures with 3500K LEDs

NOMINAL LENGTH	OUTPUT	LUMENS/ft.	WATTS/ft.	LUMINAIRE LUMENS	EFFICACY (LPW)
4'	L: low	315	4.5	1795	69
	R: regular	405	7.4	1573	55

REAL80 -

O. A. FIXTURE LENGTH 2: 24-5/8" 3: 35-5/8" 4: 46-5/8" 5: 57-5/8" 6: 68-5/8" 7: 79-5/8" 8: 90-5/8"	CORRELATED COLOR TEMPERATURE 27: 2700K-90+ CRI 30: 3000K-90+ CRI 35: 3500K-90+ CRI 40: 4000K-90+ CRI	DRIVER ND: non-dimming [Dimming] D: 0-10V, 1% HES: Lutron EcoSystem, soft-on/fade-to-black, 1% H2: Lutron Hi-lume 2-wire forward phase, 1%, (120V ONLY) EL: eldoLED ECOdrive 0-10V, 1%	LIGHT OUTPUT (lumens per foot) L: low - 315 R: regular - 405 CF: consult factory for custom output	MOUNT WD: wall mount - direct WI: wall mount - indirect C4: cable mount 4' cable length C8: cable mount 8' cable length RUN CONFIGURATION SN: single	OPTIONS ED: emergency driver (4' or 8' non-dim or 0-10V only) L: louver (4' and 8' ONLY) DH1: deco. hardware - flanged button head * DH2: deco. hardware - flanged hex head *	HOUSING/END CAP FINISH AW: architectural white (semi-matte) WH: white (semi-gloss) BL: black (semi-matte) MB: matte black ESS: environmental satin silver BZ: bronze PR: primer SA: satin anodize (may require additional lead time)	CLADDING FINISH WN: walnut EB: european beech MH: mahogany WO: white oak BB: bamboo P01: Baltic birch - maple P02: Baltic birch - red P03: Baltic birch - orange P04: Baltic birch - green P05: Baltic birch - blue CS: Corten Steel CF: consult factory for custom finish
---	---	---	--	--	--	---	---

* Applies to solid wood and plywood cladding

FEATURES

The REAL80 is a linear directional LED luminaire for general lighting applications. The 2" wide by 3" tall aluminum extruded housing is clad with 1/2" thick wood planks or heavy gauge Corten steel. The furniture grade wood options are available in several standard varieties, with hand applied finishes, while the Corten steel is clear coated. The REAL80 is available for cable or wall mounting and offered with a variety of dimming driver and light color options for added versatility.

SPECIFICATIONS

Fixture constructed of an extruded aluminum housing, extruded, frosted acrylic lens, machined aluminum end caps and wood or steel cladding

Model variations offered for cable suspended and wall mount applications

Standard housing and end cap finishes as shown below.

Wood side cladding is 1/2" thick, furniture grade, in solid walnut, European beech, mahogany, white oak and bamboo ply or nine-ply Baltic birch with maple face

Solid wood planks and bamboo ply are hand finished in five to seven coats of clear shellac and sealed with clear liquid wax for a natural look and easy cleaning

Baltic birch planks are available with a clear shellac finish or water-based stain with clear sealer

Corten steel side cladding is 14 gauge with matte clear powder coat finish and includes button head fasteners in black finish

Optional decorative industrial hardware with black finish available for wood cladding

Fixtures available in nominal lengths of 2'-8'

Standard integral 120-277V driver offered with 0-10V dimming or non-dim (other dimming driver options available)

Integral 120-277V emergency battery backup available for 6' or 8' nominal, single circuit fixtures with non-dim or 0-10V dimming (consult factory for all other lengths/drivers)

Standard light outputs are 315 and 405 lumens per foot

LEDs available in 2700K, 3000K, 3500K and 4000K, within a 3 step MacAdam ellipse, all with 90+ CRI typical

Parabolic louver option available





Life: 50,000 hours L₇₀

Limited five year warranty

UL and C-UL listed for dry locations






OPTIONS

ORDERING CODE	DESCRIPTION	SPECIFICATIONS
	<p>ED EMERGENCY LED DRIVER</p>	<ul style="list-style-type: none"> • Universal 120-277V input voltage emergency driver delivers initial minimum power of 10W for 90 minutes • Available for SINGLE CIRCUIT, 6' or 8' nominal length non-dim or 0-10V fixture only (consult factory for all other lengths/drivers) • Provided with combination test switch/indicator light mounted to wall plate for remote installation
	<p>L LOUVER</p>	<p>Parabolic louver with 5/8" blades at 1" spacing, formed from diffuse, high reflectance aluminum and supplied with light diffusion film</p> <p>Available for 4' and 8' nominal length fixtures</p>
	<p>DH1 DECORATIVE HARDWARE – FLANGED BUTTON HEAD</p>	<p>Flanged button head decorative industrial hardware in black oxide finish</p> <p>For solid wood and plywood cladding</p>
	<p>DH2 DECORATIVE HARDWARE – FLANGED HEX HEAD</p>	<p>Flanged hex head decorative industrial hardware in black oxide finish</p> <p>For solid wood and plywood cladding</p>

NOTE: WOOD SIDES NOT SHOWN.



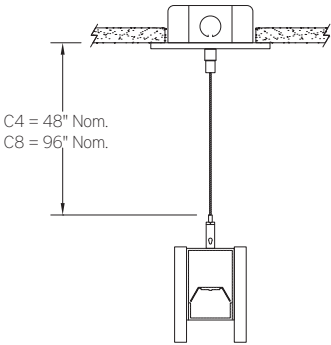








MOUNTING

	ORDERING CODE	DESCRIPTION
	WD	<p>WALL MOUNT – DIRECT ORIENTATION</p> <p>Mounting option includes:</p> <ul style="list-style-type: none"> • 1-7/8" H x 2-1/2" W aluminum bracket projects the fixture housing 3/4" from the wall surface
	WI	<p>WALL MOUNT – INDIRECT ORIENTATION</p> <p>Mounting option includes:</p> <ul style="list-style-type: none"> • 1-7/8" H x 2-1/2" W aluminum bracket projects the fixture housing 3/4" from the wall surface
 <p>C4 = 48" Nom. C8 = 96" Nom.</p>	C4 and C8	<p>CABLE MOUNT</p> <p>Mounting option includes:</p> <ul style="list-style-type: none"> • Ø 1/16" x 48" (C4) or 96" (C8) aircraft cables • 60" (C4) or 108" (C8) power cable (in coordinating finish) • Bracket bars • Ø 5" white canopies • Ceiling couplers • Side exit cable grippers

2" wide aperture LED luminaire with flush lens, wood or steel cladding

FINISH

- All wood planks are hand selected from the top grades available, for minimal defects, with high consistency in grain, color and contrast. Being a natural material, some variances in these qualities are to be expected.
- Solid woods, bamboo ply and Baltic birch ply with natural maple are finished in five to seven coats of hand applied natural shellac, followed by a liquid wax sealer for easy cleaning.
- Stained Baltic birch plywood options are hand finished in multiple coats of semi-transparent stain, followed by a clear sealer.
- Corten steel cladding is finished in matte clear powder coat and includes button head fasteners in black finish. Due to the oxidizing nature of the material, variations in surface finish patina are to be expected.

	ORDERING CODE	DESCRIPTION		ORDERING CODE	DESCRIPTION
	WN	SOLID WALNUT		P01	BALTIC BIRCH PLY - NATURAL MAPLE
	EB	SOLID EUROPEAN BEECH		P02	BALTIC BIRCH PLY - RED STAINED MAPLE
	MH	SOLID MAHOGANY		P03	BALTIC BIRCH PLY - ORANGE STAINED MAPLE
	WO	SOLID WHITE OAK		P04	BALTIC BIRCH PLY - GREEN STAINED MAPLE
	BB	BAMBOO PLY		P05	BALTIC BIRCH PLY - BLUE STAINED MAPLE
	CS	CORTEN STEEL			

LENGTH/MOUNTING DIMENSIONS


ORDERING CODE	LENGTH A	LENGTH B
2	24-5/8"	16-5/8"
3	35-5/8"	27-5/8"
4	46-5/8"	38-5/8"
5	57-5/8"	49-5/8"
6	68-5/8"	60-5/8"
7	79-5/8"	71-5/8"
8	90-5/8"	82-5/8"

RUN CONFIGURATION INFORMATION

ORDERING CODE	DESCRIPTION
SN	Single


RUN INFORMATION

Back Plan - Surface Mount Single Fixture Option

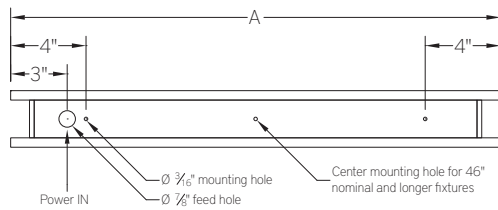


SN

Plan - Wall Mount Single Fixture Option

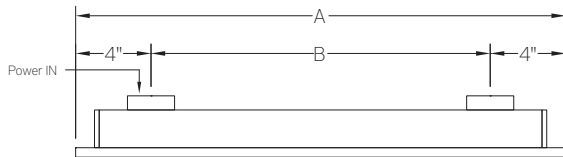

SN

Side View - Cable Mount Single Fixture Option

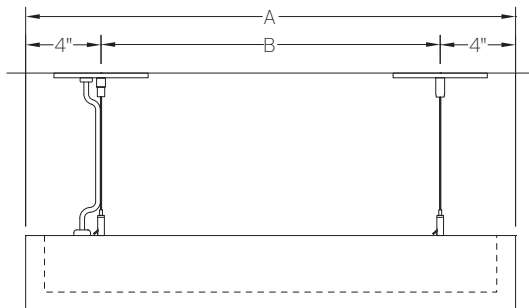

SN