


BL6300 | BL6

Cable mount luminaire for use with Seamlessline LED lamp

Project: _____ Type: _____

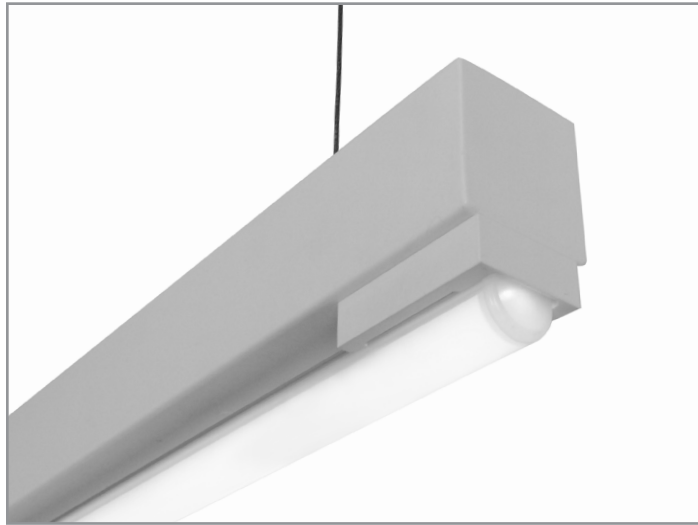

FEATURES

The BL6300 is a clean, sheet formed, cable mount luminaire designed to enhance the qualities of the Seamlessline LED lamp. The fixture is offered in a broad range of standard powder coat and stainless steel finishes and manufactured in 3'-8" nominal lengths for all available sizes of the proprietary tubular LED source. The integral driver is available with non-dim or 0-10V dimming control.

SPECIFICATIONS

Fixture constructed of formed and welded, 20 ga. steel, chemically treated to resist corrosion and enhance paint adhesion and machined aluminum lamp socket covers

Standard finishes as shown below

Available for 34", 40", 50" and 60" nominal length Nippo Seamlessline LED lamp in single fixture, continuous run and some tandem configurations

Basic continuous run fixtures provided with 18 ga. wiring harness for 6 Amp maximum

Standard integral 120-277V driver offered with 0-10V dimming or non-dim


Integral 120-277V emergency battery backup available for non-dimming 50" and longer length fixtures

Seamlessline LED lamps ordered separately – see supplementary lamp info. sheet for details


UL and C-UL listed for dry and damp locations

Limited five year warranty

SECTION



PLAN / SIDE

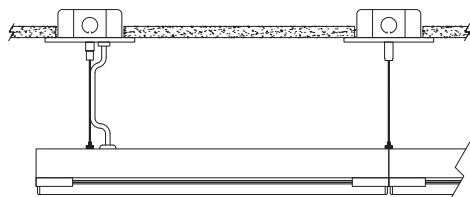

PERFORMANCE

| NOMINAL LENGTH | LUMENS/ft. | WATTS/ft. | LUMINAIRE LUMENS | EFFICACY |
|----------------|------------|-----------|------------------|----------|
| 50" | 412 | 5.4 | 1692 | 76 |

Note: All data reflects fixture with 3500K Seamlessline LED lamp

BL6300 –

FIXTURE LENGTH

34: 34-15/32"
40: 39-13/32"
50: 49-9/32"
60: 59-3/32"
4040: 78-13/16"
5050: 98-19/32"

DRIVER

ND: non-dimming
D: dimming 0-10V, 6%

MOUNT

C4: cable mount 4' cable length
C8: cable mount 8' cable length
CF: consult factory for custom mounting

RUN CONFIGURATION

SN: single
ST: starter
AD: adder
TR: terminator

OPTIONS

ED: emergency driver (non-dimming 50" and longer fixtures)


FINISH

AW: architectural white (semi-matte)
WH: white (semi-gloss)
BL: black (semi-matte)
MB: matte black
ESS: environmental satin silver
BZ: bronze
PR: primer
S4: #4 brushed stainless steel
S8: #8 polished stainless steel
CF: consult factory for custom finish


BL6300 | BL6

Cable mount luminaire for use with Seamlessline LED lamp

MOUNTING
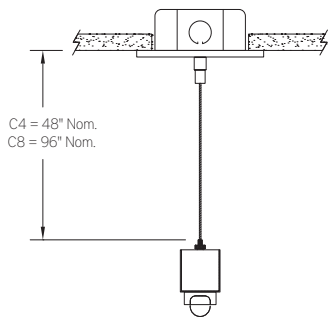
| | ORDERING CODE | DESCRIPTION |
|--|---------------|---|
|  <p>C4 = 48" Nom. C8 = 96" Nom.</p> | C4 and C8 | <p>CABLE MOUNT</p> <p>Mounting option includes:</p> <ul style="list-style-type: none"> • Ø 1/16" x 48" (C4) or 96" (C8) aircraft cables • 60" (C4) or 108" (C8) power cable (in coordinating finish) • Bracket bars • Ø 5" white canopies • Ceiling couplers • Cable grippers |

OPTIONS
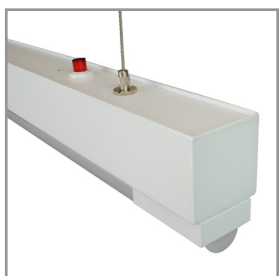
| | ORDERING CODE | DESCRIPTION | SPECIFICATIONS |
|--|---------------|----------------------|---|
|  | ED | EMERGENCY LED DRIVER | <ul style="list-style-type: none"> • Universal 120-277V input voltage emergency driver delivers initial minimum power of 10W for 90 minutes • Available for Non-Dimming 50" and longer fixtures. • Note: remote battery backup available for shorter fixture lengths - ordered separately, consult factory for details • Indicator/test switch located on top of the fixture, near an end |

BL6300 | BL6

Cable mount luminaire for use with Seamlessline LED lamp

LENGTH / MOUNTING DIMENSIONS


| ORDERING CODE | LENGTH A | LENGTH B | LENGTH C |
|---------------|-----------|-----------|-----------|
| 34 | 28-15/32" | 31-15/32" | 34-15/32" |
| 40 | 33-13/32" | 36-13/32" | 39-13/32" |
| 50 | 43-9/32" | 46-9/32" | 49-9/32" |
| 60 | 53-3/32" | 56-3/32" | 59-3/32" |
| 4040 | 72-13/16" | 75-13/16" | 78-13/16" |
| 5050 | 92-19/32" | 95-19/32" | 98-19/32" |

RUN CONFIGURATION INFORMATION

| ORDERING CODE | DESCRIPTION |
|---------------|-------------|
| SN | Single |
| ST | Starter |
| AD | Adder |
| TR | Terminator |


RUN INFORMATION

Side View - Single Fixture Option

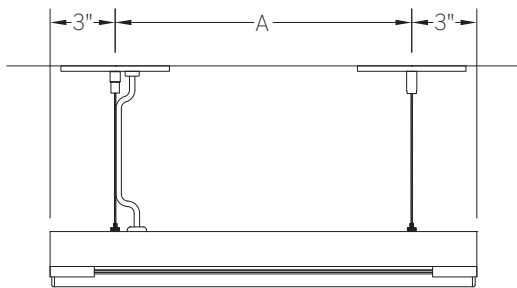

SN

Side View - Continuous Run Option

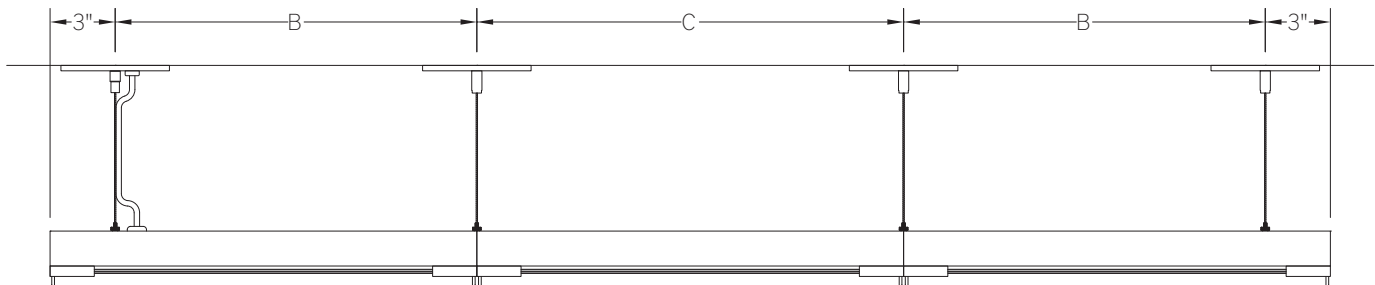

ST

AD

TR