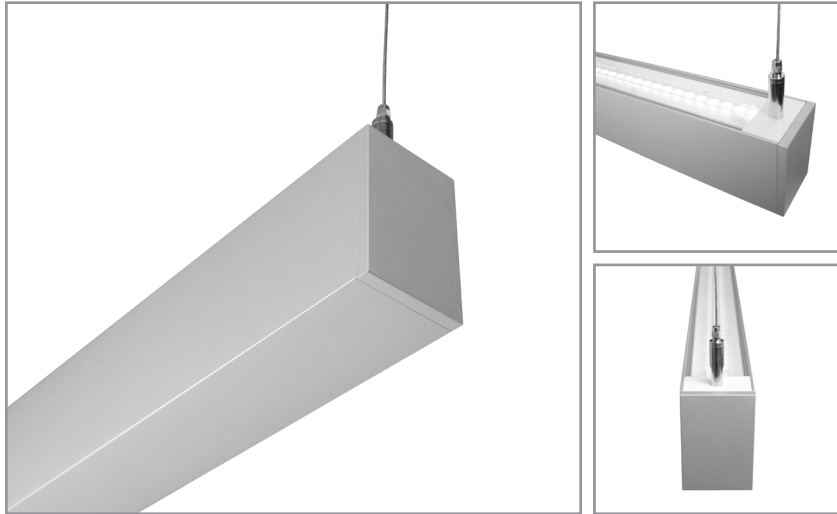


# BSS235 | bodhi

2" wide indirect LED luminaire

Project: \_\_\_\_\_ Type: \_\_\_\_\_



## FEATURES

The BSS235 is an indirect linear LED luminaire for general lighting applications. The 2" wide by 3" tall extrusion is capped with machined aluminum end caps and available in two lighting distributions. A variety of dimming drivers, light outputs and finishes add further versatility of this clean design luminaire.

## SPECIFICATIONS

Fixture constructed of extruded aluminum, frosted extruded acrylic lens and machined aluminum end caps

Lambertian and batwing light distributions available

Standard finishes as shown below

Available in nominal lengths of 2'-8' single fixtures and continuous runs

Basic continuous run fixtures provided with 18 ga. wiring harness for 6 Amp maximum load (consult factory for runs requiring sensor integration, etc.)

Standard integral 120-277V driver offered with 0-10V dimming or non-dim (other dimming driver options available)

Integral 120-277V emergency battery backup available for 4' or 8' nominal non-dim or 0-10V (consult factory for all other lengths/drivers)

Standard light outputs range from 465 – 970 lumens per foot depending on the optic option

LEDs available in 2700K, 3000K, 3500K and 4000K, within a 3 step MacAdam ellipse, all with 90+ CRI typical

Lamp life rated at 50,000 hours


Available with several sensor options

Life: 50,000 hours L<sub>70</sub>

Limited five year warranty

UL and C-UL listed for dry and damp locations

## SECTION



## PERFORMANCE

NOMINAL LENGTH	OUTPUT	OUTPUT	LUMENS/ft.	WATTS/ft.	LUMINAIRE LUMENS	EFFICACY (LPW)
4'	Lambertian	L: low	465	5.0	1738	93
		R: regular	600	7.2	2257	84
		H: high	780	10.1	2966	79
	Batwing	L: low	570	5.7	2112	100
		R: regular	740	7.9	2743	94
		H: high	970	10.9	3604	89

\*Note: All data reflects fixture with 3500K LEDs



## BSS235 -

### NOMINAL FIXTURE LENGTH\*

- 2: 24-1/2"
- 3: 35-1/2"
- 4: 46-1/2"
- 5: 57-1/2"
- 6: 68-1/2"
- 7: 79-1/2"
- 8: 90-1/2"

### CORRELATED COLOR TEMPERATURE

- 27: 2700K-90+ CRI
- 30: 3000K-90+ CRI
- 35: 3500K-90+ CRI
- 40: 4000K-90+ CRI

### LIGHT OUTPUT (lumens per foot)

- L: low – 570 (w/optic option 2)
- R: regular – 740 (w/optic option 2)
- H: high – 970 (w/optic option 2)
- CF: consult factory for custom output

### DRIVER

- ND: non-dimming
- [Dimming]
- D: 0-10V, 1%
- HES: Lutron EcoSystem, soft-on/fade-to-black, 1%
- H2: Lutron Hi-Lume 2-wire forward phase, 1%, (120V ONLY)
- E5: Lutron EcoSystem 5-Series, 5%
- EL: eldoLED ECOdrive 0-10V, 1%

### OPTIC

- 1: general Lambertian distribution
- 2: batwing distribution

### RUN CONFIGURATION

- SN: single
- ST: starter
- AD: adder
- TR: terminator

### MOUNT

- C4: cable mount 4' cable length
- C8: cable mount 8' cable length
- CF: consult factory for custom mounting

### FINISH



- AW: architectural white (semi-matte)
- WH: white (semi-gloss)
- BL: black (semi-matte)
- MB: matte black
- ESS: environmental satin silver
- BZ: bronze
- PR: primer
- CF: consult factory for custom finish
- SA: satin anodize (may require additional lead time)

### OPTIONS

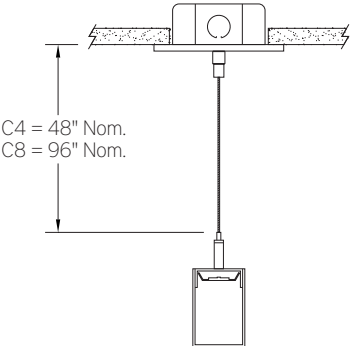
- ED: emergency driver (4' or 8' non-dim or 0-10V only)
- WS1: Wattstopper FS-205 ‡
- EN1: Enlighted FS-D22 ‡
- ES1: EasySense SN102 ‡
- ES2: EasySense SN200 ‡
- ES3: EasySense SN300 ‡

\*Actual dimension dependent on run configuration  
‡ See sensor section for driver compatibility information

## INDIRECT OPTIC OPTION

ORDERING CODE	DESCRIPTION	SPECIFICATIONS
	1 Lambertian distribution	Lightly frosted extruded acrylic lens for general Lambertian distribution
	2 Batwing distribution	Clear extruded acrylic with wide distribution optic features

## MOUNTING

ORDERING CODE	DESCRIPTION
	<p>C4 and C8</p> <p>CABLE MOUNT</p> <p>Mounting option includes:</p> <ul style="list-style-type: none"> <li>• Ø 1/16" x 48" (C4) or 96" (C8) aircraft cables</li> <li>• 60" (C4) or 108" (C8) power cable (in coordinating finish)</li> <li>• Bracket bars</li> <li>• Ø 5" white canopies</li> <li>• Ceiling couplers</li> <li>• Side exit cable grippers</li> </ul>

## OPTIONS




ORDERING CODE	DESCRIPTION	SPECIFICATIONS
ED	EMERGENCY LED DRIVER	<ul style="list-style-type: none"> <li>• Universal 120-277V input voltage emergency driver delivers initial minimum power of 10W for 90 minutes</li> <li>• Available for 4' or 8' nominal length non-dim or 0-10V fixture (consult factory for all other lengths/drivers)</li> <li>• Indicator lamp/test switch located on the underside at an end</li> </ul>

# BSS235 | **bodhi**

2" wide indirect LED luminaire

## INTEGRATED SENSORS

Note: For 4' nominal and longer fixture. All sensors located on the fixture underside at an end.

	ORDERING CODE	BRAND AND MODEL	FUNCTIONS	
	WS1	Wattstopper FS-205	Occupancy and light level sensor	For use with on/off or 0-10V dimming drivers only
	EN1	Enlighted FS-D22	Occupancy, ambient light sensing, daylight harvesting, and environment monitoring for Enlighted control network	Provided with Advance sensor ready series 0-10V dimming drivers
	ES1	Philips EasySense SN102	Occupancy, daylight harvesting and task tuning sensor with simple grouping	Provided with Advance sensor ready series 0-10V dimming drivers
	ES2	Philips EasySense SN200	Occupancy, daylight harvesting and task tuning sensor with advance grouping	
	ES3	Philips EasySense SN300	Occupancy, daylight harvesting sensor for integration with Zigbee control networks	

# BSS235 | **bodhi**

2" wide indirect LED luminaire

## LENGTH/MOUNTING DIMENSIONS

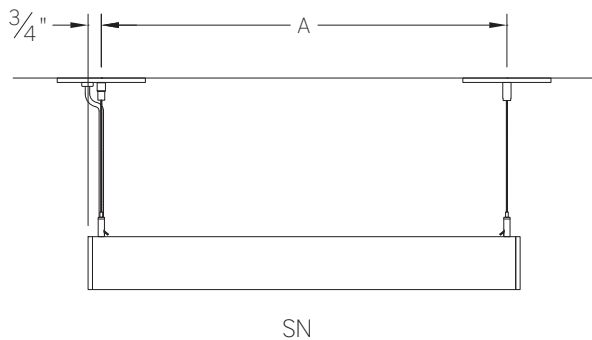
ORDERING CODE	LENGTH A	LENGTH B	LENGTH C
2	23"	23-1/2"	24"
3	34"	34-1/2"	35"
4	45"	45-1/2"	46"
5	56"	56-1/2"	57"
6	67"	67-1/2"	68"
7	78"	78-1/2"	79"
8	89"	89-1/2"	90"

## RUN CONFIGURATION INFORMATION

ORDERING CODE	DESCRIPTION
SN	Single
ST	Starter
AD	Adder
TR	Terminator

## RUN INFORMATION

Side View - Single Fixture



Side View - Continuous Run

