


BSS235 | **bodhi**

2" wide indirect LED luminaire

Project: _____ Type: _____

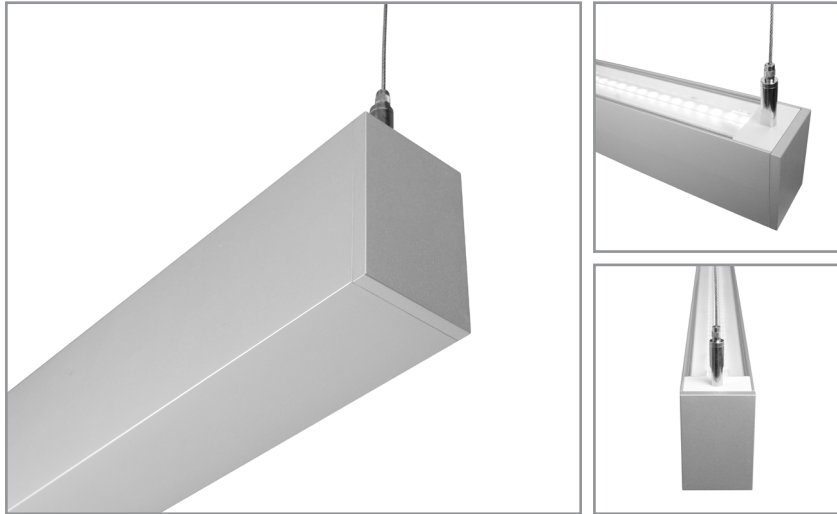

FEATURES

The BSS235 is an indirect linear LED luminaire for general lighting applications. The 2" wide by 3" tall extrusion is capped with machined aluminum end caps and available in two lighting distributions. A variety of dimming drivers, light outputs and finishes add further versatility of this clean design luminaire.

SPECIFICATIONS

Fixture constructed of extruded aluminum, frosted extruded acrylic lens and machined aluminum end caps

Lambertian and batwing light distributions available

Standard finishes as shown below

Available in nominal lengths of 2'-8' single fixtures and continuous runs

Basic continuous run fixtures provided with 18 ga. wiring harness for 6 Amp maximum load (consult factory for runs requiring sensor integration, etc.)

Standard integral 120-277V driver offered with 0-10V dimming or non-dim (other dimming driver options available)

Integral 120-277V emergency battery backup available for 4' or 8' nominal non-dim or 0-10V (consult factory for all other lengths/drivers)

Standard light outputs range from 465-970 lumens per foot depending on the optic option

LEDs available in 2700K, 3000K, 3500K and 4000K, within a 3 step MacAdam ellipse, all with 90+ CRI typical

Lamp life rated at 50,000 hours


Available with several sensor options

Life: 50,000 hours L₇₀

Limited five year warranty

UL and C-UL listed for dry and damp locations

SECTION



Shown with batwing optic option

PERFORMANCE

NOMINAL LENGTH	OUTPUT	OUTPUT	LUMENS/ft.	WATTS/ft.	LUMINAIRE LUMENS	EFFICACY (LPW)
4'	Lambertian	L: low	465	5.0	1738	93
		R: regular	600	7.2	2257	84
		H: high	780	10.1	2966	79
	Batwing	L: low	570	5.7	2112	100
		R: regular	740	7.9	2743	94
		H: high	970	10.9	3604	89

*Note: All data reflects fixture with 3500K LEDs



BSS235 -

NOMINAL FIXTURE LENGTH*

- 2: 24-1/2"
- 3: 35-1/2"
- 4: 46-1/2"
- 5: 57-1/2"
- 6: 68-1/2"
- 7: 79-1/2"
- 8: 90-1/2"

CORRELATED COLOR TEMPERATURE

- 27: 2700K-90+ CRI
- 30: 3000K-90+ CRI
- 35: 3500K-90+ CRI
- 40: 4000K-90+ CRI

DRIVER

- ND: non-dimming
- [Dimming]**
- D: 0-10V, 1%
- HES: Lutron EcoSystem, soft-on/fade-to-black, 1%
- H2: Lutron Hi-lume 2-wire forward phase, 1%, (120V ONLY)

- EL: eldoLED ECOdrive 0-10V, 1%

LIGHT OUTPUT (lumens per foot w/optic option 2)

- L: low - 570
- R: regular - 740
- H: high - 970
- CF: consult factory for custom output

OPTIC

- 1: general Lambertian distribution
- 2: batwing distribution

RUN CONFIGURATION

- SN: single
- ST: starter
- AD: adder
- TR: terminator

MOUNT

- C4: cable mount 4' cable length
- C8: cable mount 8' cable length
- CF: consult factory for custom mounting

OPTIONS

- ED: emergency driver (4' or 8' non-dim or 0-10V only)
- WS1A: Wattstopper FS-205, 100%-0% ‡
- WS1B: Wattstopper FS-205, 100%-50% ‡
- EN1: Enlighted FS-D22 ‡
- ES1A: EasySense SNS102, 100%-0% ‡
- ES1B: EasySense SNS102, 100%-50% ‡
- ES2A: EasySense SNS200, 100%-0% ‡
- ES2B: EasySense SNS200, 100%-50% ‡
- ES3A: EasySense SNS300, 100%-0% ‡
- ES3B: EasySense SNS300, 100%-50% ‡



FINISH

- AW: architectural white (semi-matte)
- WH: white (semi-gloss)
- BL: black (semi-matte)
- MB: matte black
- ESS: environmental satin silver
- BZ: bronze
- PR: primer
- CF: consult factory for custom finish
- SA: satin anodize (may require additional lead time)


* Actual dimension dependent on run configuration

‡ See options section for details

INDIRECT OPTIC OPTION

	ORDERING CODE	DESCRIPTION	SPECIFICATIONS
	1	Lambertian distribution	Lightly frosted extruded acrylic lens for general Lambertian distribution
	2	Batwing distribution	Clear extruded acrylic with wide distribution optic features

MOUNTING

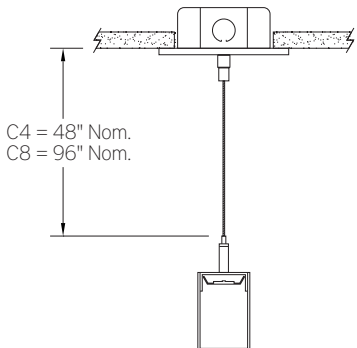	ORDERING CODE	DESCRIPTION
 <p>C4 = 48" Nom. C8 = 96" Nom.</p>	C4 and C8	CABLE MOUNT Mounting option includes: <ul style="list-style-type: none"> • Ø 1/16" x 48" (C4) or 96" (C8) aircraft cables • 60" (C4) or 108" (C8) power cable (in coordinating finish) • Bracket bars • Ø 5" white canopies • Ceiling couplers • Side exit cable grippers

OPTIONS




ORDERING CODE	DESCRIPTION	SPECIFICATIONS
ED	EMERGENCY LED DRIVER	<ul style="list-style-type: none"> • Universal 120-277V input voltage emergency driver delivers initial minimum power of 10W for 90 minutes • Available for 4' or 8' nominal length non-dim or 0-10V fixture (consult factory for all other lengths/drivers) • Indicator lamp/test switch located on the underside at an end

BSS235 | **bodhi**

2" wide indirect LED luminaire

INTEGRATED SENSORS

Note: For 4' nominal and longer fixture. All sensors located on the fixture underside at an end.
Consult factory for custom light output setting

	ORDERING CODE	LIGHT OUTPUT SETTING	BRAND AND MODEL	FUNCTIONS	NOTES
	WS1A	100% – 0%	Wattstopper FS-205	Occupancy and light level sensor	For use with on/off or 0-10V dimming drivers only
	WS1B	100% – 50%			
	EN1	Set during commissioning	Enlighted FS-D22	Occupancy, ambient light sensing, daylight harvesting, and environment monitoring for Enlighted control network	Provided with Advance sensor ready series 0-10V dimming drivers
	ES1A	100% – 0%	Philips EasySense SNS102	Occupancy, daylight harvesting and task tuning sensor with simple grouping	Provided with Advance sensor ready series 0-10V dimming drivers
	ES1B	100% – 50%			
	ES2A	100% – 0%	Philips EasySense SNS200	Occupancy, daylight harvesting and task tuning sensor with advance grouping	Provided with Advance sensor ready series 0-10V dimming drivers
	ES2B	100% – 50%			
	ES3A	100% – 0%	Philips EasySense SNS300	Occupancy, daylight harvesting sensor for integration with Zigbee control networks	Provided with Advance sensor ready series 0-10V dimming drivers
	ES3B	100% – 50%			

BSS235 | **bodhi**

2" wide indirect LED luminaire

LENGTH/MOUNTING DIMENSIONS


ORDERING CODE	LENGTH A	LENGTH B	LENGTH C
2	23"	23-1/2"	24"
3	34"	34-1/2"	35"
4	45"	45-1/2"	46"
5	56"	56-1/2"	57"
6	67"	67-1/2"	68"
7	78"	78-1/2"	79"
8	89"	89-1/2"	90"

RUN CONFIGURATION INFORMATION

ORDERING CODE	DESCRIPTION
SN	Single
ST	Starter
AD	Adder
TR	Terminator


RUN INFORMATION

Side View - Single Fixture

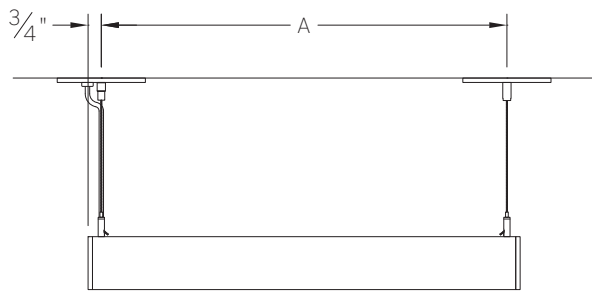

SN

Side View - Continuous Run

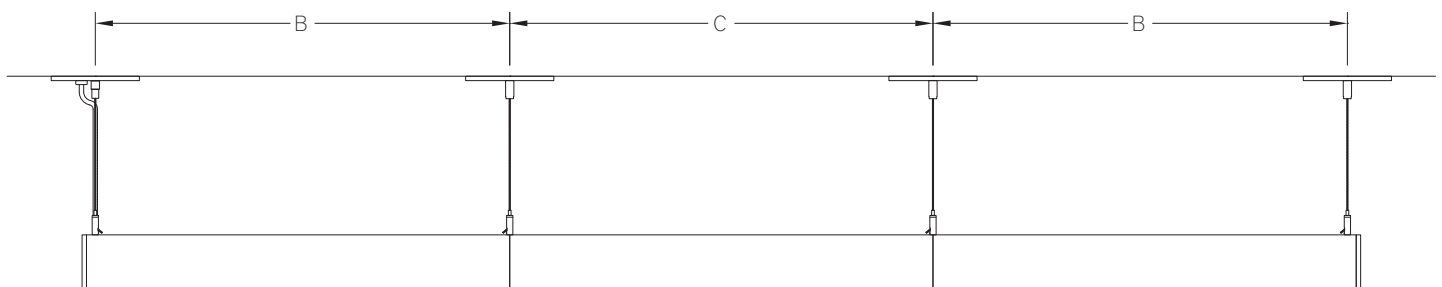

ST

AD

TR