




#### SECTION

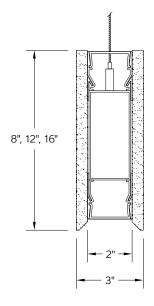

#### **FEATURES**

The Chill HB2 acoustic baffle compliments the HL2 luminaire, enhancing interior spaces with subtle to bold colors, while damping sound reflections. The 2" wide frame is clad with ½" thick felt acoustic panels in 8", 12" or 16" heights and twenty standard colors. The fixture housing is available in several architectural finishes, as well as optional RAL finishes to coordinate with panel colors. Fixture end treatments include matching acoustic material, machined aluminum end caps with powder coat or printed imagery options or solid wood end caps in a variety of finishes.

#### **SPECIFICATIONS**

Fixture constructed of heavy gauge sheet formed steel and aluminum and PET acoustic felt panels.

Model variations offered for cable suspended and wall mount applications as 2'-8' nominal single fixtures and continuous runs up to 50'.

The  $\frac{1}{2}$ " thick, 100% PET (>75% recycled), fire rated (ASTM E84 Class B) 0.98 NRC acoustic felt panels feature a bottom beveled edge, extended ends and are available in twenty standard colors.

Fixture end treatment options available in matching acoustic material or machined aluminum end caps with standard powder coat, optional RAL finishes, high resolution digital imagery or solid wood end caps.

Fixture housing available in standard powder coat finishes and optional RAL finishes coordinated to the panel colors.

 $Limited\ five\ year\ warranty.$ 





HB2 -

HEIGHT 8: 8"

12: 12" 16: 16" RUN LENGTH\*

Specify run from 2′–50′ to the nearest foot

BOTTOM EDGE TREATMENT

DB: drop beveled edge CF: consult factory for custom edge END TREATMENT

1: extended panels 2: acoustic CF: consult factory for custom end

treatment

END FINISH

code from color key:

CF: consult factory for custom end finish HOUSING FINISH

code from color key:

CF: consult factory for custom housing finish MOUNT

C4: cable mount 4' cable length
C8: cable mount 8' cable length

WM: wall mount
CF: consult factory
for custom mounting

PANEL FINISH

code from color key:

CF: consult factory for custom finish


<sup>\*</sup> Specify run length to the nearest one foot. Factory will configure using the least quantity of fixtures as close to the desired run length as possible without exceeding the length. Run to be confirmed with a shop drawing.

# HB2 | chill

2" nominal width non-illuminated acoustic baffle



HEIGHT

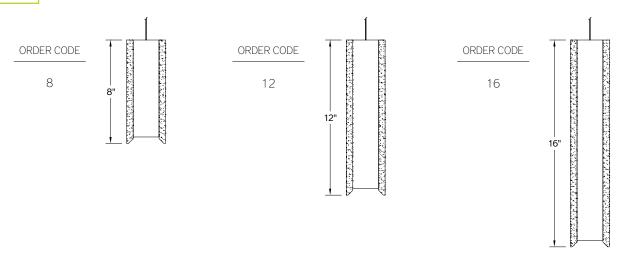

#### BOTTOM EDGE TREATMENT

DOTTOM EDGE TREATMENT			
	ORDERING CODE	DESCRIPTION	SPECIFICATIONS
	DB	DROP BEVEL EDGE	Bottom edge of panels extends ½" below the underside, finished with a 45 degree bevel.

### END TREATMENT

ORDERING CODE	DESCRIPTION	SPECIFICATIONS
1	EXTENDED PANELS	Panel ends extend 1/2" beyond the housing length. Includes machined aluminum end cap.
2	ACOUSTIC	Acoustic material end cap, bottom edge finished with 45 degree bevel.




#### END FINISH COLOR KEY

NOTE: For End Treatment 2 (acoustic), the end finish will be the same as the specified panel finish.

#### POWDER COAT FINISH OPTIONS

Applies to End Treatment 1 (extended panels). Finish applied to machined aluminum end cap.

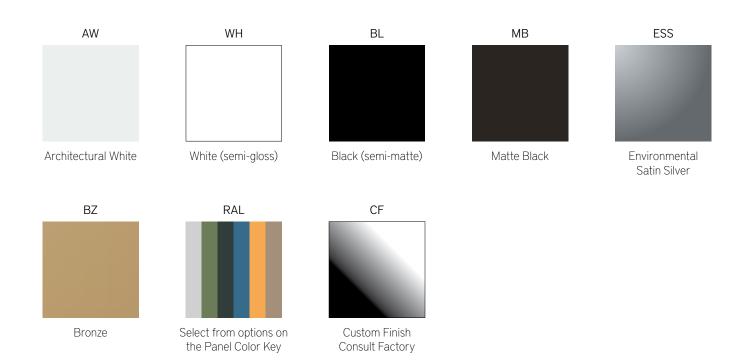



#### END FINISH COLOR KEY (CONTINUED)

#### WOOD END CAP OPTIONS

Applies to End Treatment 1 (extended panels).

Furniture grade caps are 1/2" thick and hand finished in clear shellac with a liquid wax sealer.



#### FAUX FINISH OPTIONS

Applies to End Treatment 1 (extended panels).

Finish comprised of a multi-stage application process that produces durable, high resolution imagery.






HOUSING FINISH

#### POWDER COAT FINISH OPTIONS


Note: Housing finish can be different than the end cap finish (End Treatment 1). An upcharge may apply.

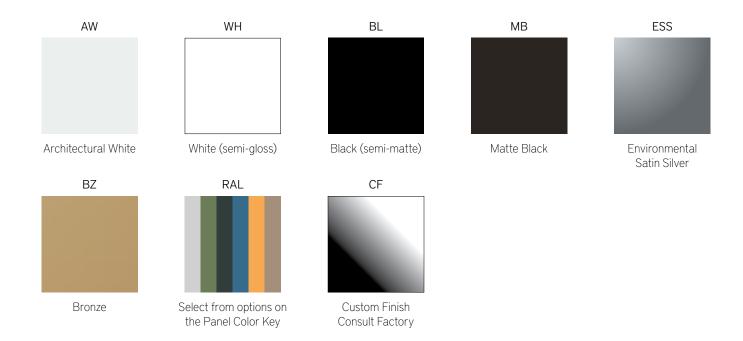

#### MOUNTING

ORDERING CODE

DESCRIPTION



C4 and C8

#### CABLE MOUNT

Mounting option includes:

- Ø 1/16"x 48" (C4) or 96" (C8) aircraft cables
- Ø 5" white canopies
- · Ceiling couplers, cable grippers and hardware



#### ACOUSTIC PANEL COLOR KEY

Chill acoustic panels are made from 100% PET (>75% recycled) colored felt fibers. The ½" thick, cohesive material construction traps sound waves and aids in reducing sound reflections within interior spaces (0.98 NRC). Lightweight and durable, the panels are also fire rated (ASTM E84 Class B). The twenty standard colors can be paired with matching acoustic ends, wood end caps or metal end caps in six standard powder coat finishes, optional coordinating RAL colors or Faux finishes.

Note: Ordering Code shown above color image. Optional coordinating RAL finish for end cap and fixture housing shown in parenthesis.



## HB2 | chill

2" nominal width non-illuminated acoustic baffle



#### **RUN INFORMATION**

Specify run length to the nearest one foot. Factory will configure using the least quantity of fixtures as close to the desired run length as possible without exceeding the length. Mounting points will be located to provide the most even appearance possible. Consult factory for other mounting options.

#### Runs to be confirmed with a shop drawing.


RUN LENGTH	FIXTURES USED (TO THE NOMINAL FOOT)
2′	2'
3′	3′
4'	4'
5′	5′
6′	6′
7′	7′
8′	8′
9′	5' + 4'
10′	5' + 5'
11′	6' + 5'
12′	6' + 6'
13′	7' + 6'
14′	7' + 7'
15′	8' + 7'
16′	8' + 8'
17′	6' + 5' + 6'
18′	6' + 6' + 6'

RUN LENGTH	FIXTURES USED (TO THE NOMINAL FOOT)
19′	6' + 7' + 6'
20′	7' + 6' + 7'
21′	7' + 7' + 7'
22′	7' + 8' + 7'
23′	8' + 7' + 8'
24′	8' + 8' + 8'
25′	6' + 6' + 6' + 7'
26′	7' + 6' + 6' + 7'
27′	7' + 7' + 7' + 6'
28′	7' + 7' + 7' + 7'
29′	7' + 7' + 7' + 8'
30′	8' + 7' + 7' + 8'
31′	8' + 8' + 8' + 7'
32′	8' + 8' + 8' + 8'
33′	6' + 7' + 7' + 7' + 6'
34′	7' + 7' + 6' + 7' + 7'


RUN LENGTH	FIXTURES USED (TO THE NOMINAL FOOT)
35′	7' + 7' + 7' + 7' + 7'
36′	7' + 7' + 8' + 7' + 7'
37′	8' + 7' + 7' + 7' + 8'
38′	7' + 8' + 8' + 8' + 7'
39′	8' + 8' + 7' + 8' + 8'
40′	8' + 8' + 8' + 8' + 8'
41′	7' + 7' + 7' + 7' + 7' + 6'
42′	7' + 7' + 7' + 7' + 7' + 7'
43′	7' + 7' + 7' + 7' + 7' + 8'
44′	8' + 7' + 7' + 7' + 7' + 8'
45′	8' + 8' + 7' + 7' + 7' + 8'
46′	7' + 8' + 8' + 8' + 8' + 7'
47′	8' + 8' + 8' + 8' + 8' + 7'
48′	8' + 8' + 8' + 8' + 8' + 8'
49′	7' + 7' + 7' + 7' + 7' + 7' + 7'
50′	7' + 7' + 7' + 8' + 7' + 7' + 7'

#### ILLUSTRATED EXAMPLES

10' RUN



15' RUN



20' RUN

