



Project: _____ Type: _____

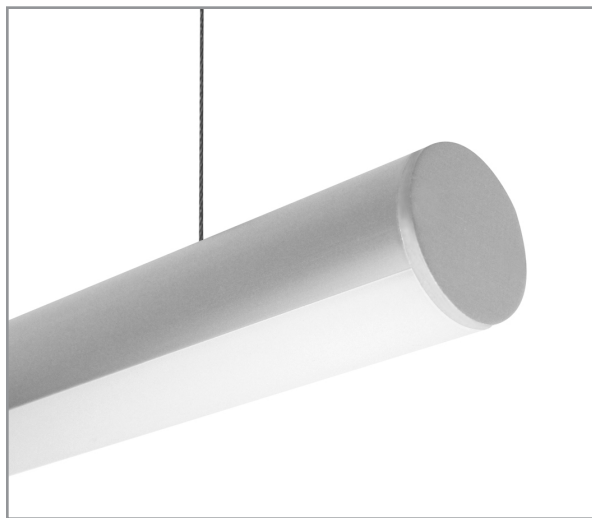

FEATURES

The BSS500 is a suspended linear LED luminaire with remote driver for general lighting applications. The Ø1-3/8" extruded aluminum housing is fitted with tightly spaced, 90+ CRI diodes and a frosted acrylic lens to produce seamless, diffuse illumination. Machined aluminum end caps finish off the fixture ends.

SPECIFICATIONS

Fixture constructed of an extruded aluminum housing, frosted acrylic extruded lens and machined aluminum end caps

Standard finishes as shown below

Available in nominal lengths of 2'-8' single fixtures and continuous runs

Included standard remote 120-277V driver offered with 0-10V dimming or non-dim (other dimming driver options available)

Remote mounted emergency battery backup available (ordered separately, consult factory for details)

Standard outputs are 400 and 520 lumens per foot


LEDs available in 2700K, 3000K, 3500K, and 4000K, within a 3 step MacAdam ellipse, all with 90+ CRI typical

Life: 50,000 hours L₇₀


Limited five year warranty

UL and C-UL listed for dry and damp locations

SECTION



SIDE

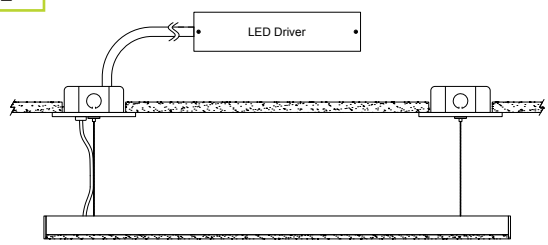

PERFORMANCE

Note: All data reflects fixtures with 3500K LEDs

NOMINAL LENGTH	OUTPUT	LUMENS/ft.	WATTS/ft.	LUMINAIRE LUMENS	EFFICACY (LPW)
4'	L: low	400	3.9	1675	102
	R: regular	520	5.6	2175	92

BSS500 -


<p>NOMINAL FIXTURE LENGTH*</p> <p>23: 22-1/2" 63: 62-7/8"</p> <p>26: 26-3/16" 67: 66-1/2"</p> <p>30: 29-7/8" 70: 70-3/16"</p> <p>34: 33-1/2" 74: 73-7/8"</p> <p>37: 37-3/16" 78: 77-1/2"</p> <p>41: 40-7/8" 81: 81-3/16"</p> <p>45: 44-1/2" 85: 84-7/8"</p> <p>48: 48-3/16" 89: 88-1/2"</p> <p>52: 51-7/8" 92: 92-3/16"</p> <p>56: 55-1/2" 96: 95-7/8"</p> <p>59: 59-3/16"</p>	<p>CORRELATED COLOR TEMPERATURE</p> <p>27: 2700K-90+ CRI</p> <p>30: 3000K-90+ CRI</p> <p>35: 3500K-90+ CRI</p> <p>40: 4000K-90+ CRI</p>	<p>DRIVER</p> <p>ND: non-dimming</p> <p>[Dimming]</p> <p>D: 0-10V, 1%</p> <p>HES: Lutron EcoSystem, soft-on/ fade-to-black, 1%</p> <p>H2: Lutron Hi-lume 2-wire forward phase, 1%, (120V ONLY)</p> <p>EL: eldoLED</p> <p>ECOdrive, 0-10V, 1%</p>	<p>LIGHT OUTPUT (lumens per foot)</p> <p>L: low – 400</p> <p>R: regular – 520</p> <p>CF: consult factory for custom output</p>	<p>MOUNT</p> <p>C4: cable mount 4' cable length</p> <p>C8: cable mount 8' cable length</p> <p>CF: consult factory for custom mounting</p>	<p>FINISH</p> <p>AW: architectural white (semi-matte)</p> <p>WH: white (semi-gloss)</p> <p>BL: black (semi-matte)</p> <p>MB: matte black</p> <p>ESS: environmental satin silver</p> <p>BZ: bronze</p> <p>PR: primer</p> <p>CF: consult factory for custom finish</p> <p>SA: satin anodize (may require additional lead time)</p>
				<p>RUN CONFIGURATION</p> <p>SN: single</p> <p>ST: starter</p> <p>AD: adder</p> <p>TR: terminator</p>	

Note: Each fixture includes a remote driver matched for fixture length and light output
 * Actual dimension dependent on run configuration

MOUNTING

ORDERING CODE

DESCRIPTION

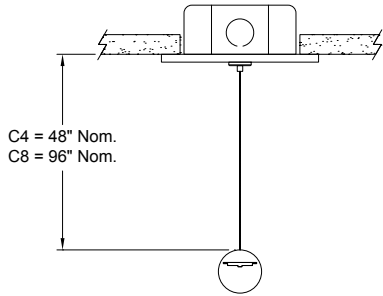

C4 and C8

CABLE MOUNT

Mounting option includes:

- Ø 1/16" x 48" (C4) or 96" (C8) aircraft cables
- 60" (C4) or 108" (C8) low voltage cable in coordinating finish
- Bracket bars
- Ø 5" white canopies
- Canopy mount cable grippers

LENGTH/MOUNTING DIMENSIONS


ORDERING CODE	LENGTH A	LENGTH B	LENGTH C
23	16-7/8"	19-9/16"	22-1/2"
26	20-9/16"	23-1/4"	26-3/16"
30	24-1/4"	26-15/16"	29-7/8"
34	27-7/8"	30-9/16"	33-1/2"
37	31-9/16"	34-1/4"	37-3/16"
41	35-1/4"	37-15/16"	40-7/8"
45	38-7/8"	41-9/16"	44-1/2"
48	42-9/16"	45-1/4"	48-3/16"
52	46-1/4"	48-15/16"	51-7/8"
56	49-7/8"	52-9/16"	55-1/2"
59	53-9/16"	56-1/4"	59-3/16"
63	57-1/4"	59-15/16"	62-7/8"
67	60-7/8"	63-9/16"	66-1/2"
70	64-9/16"	67-1/4"	70-3/16"
74	68-1/4"	70-15/16"	73-7/8"
78	71-7/8"	74-9/16"	77-1/2"
81	76-9/16"	78-1/4"	81-3/16"
85	79-1/4"	81-15/16"	84-7/8"
89	82-7/8"	85-9/16"	88-1/2"
92	86-9/16"	89-1/4"	92-3/16"
96	90-1/4"	92-15/16"	95-7/8"

RUN CONFIGURATION INFORMATION

ORDERING CODE	DESCRIPTION
SN	Single
ST	Starter
AD	Adder
TR	Terminator


RUN INFORMATION

Side View - Cable Mount Single Fixture Option

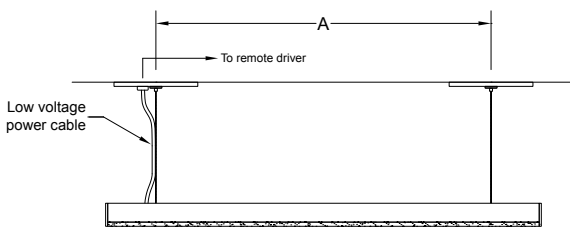

SN

Side View - Cable Mount Continuous Run Option

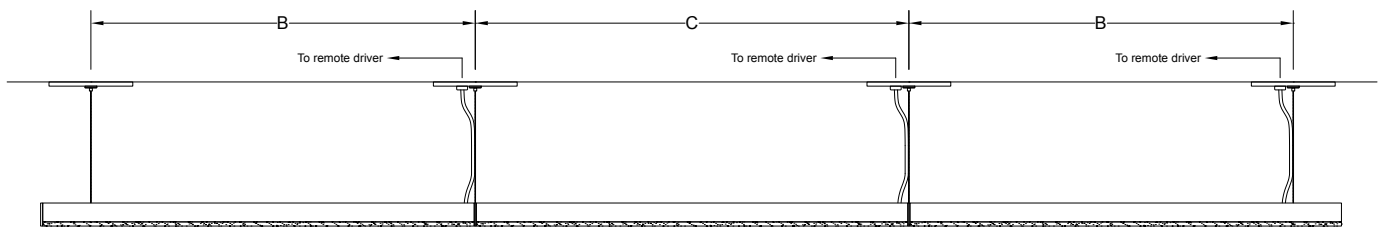

ST

AD

TR