



- Fully assembled housing is formed and welded, 20 ga. steel, chemically treated to resist corrosion and enhance paint adhesion
- Model variations offered for surface, cable suspended and pendant mount applications
- Available in standard white, black, silver, platinum, bronze and primer powder coat, applied post production (consult factory for custom finishes)
- Includes frosted or linear prismatic acrylic lens
- Includes passive infrared occupancy sensor
- Available for one or two T5 14W, 21W, 28W, 35W and high output 24W, 39W, 54W, 80W linear fluorescent lamps in single and some tandem lengths
- Standard ballast is specification grade 120V-277V program start (consult factory for other voltage options)
- Dimming, emergency battery backup and specialized ballast factor options available (consult factory for availability and system compatibility)
- Knock-outs on back accept standard electrical fittings by others (consult factory for other locations)
- Rotational locking lamp holders
- UL and C-UL listed for dry and damp locations
- IBEW manufactured and labeled
- Made in the U.S.A.


LAMPS      WATTS      VOLTAGE      BALLAST      LENS      MOUNT      FINISH

<p><b>IPR5MS-OCC</b> +</p> <ul style="list-style-type: none"> <li>1: single lamp</li> <li>2: double lamp</li> </ul>	<p>+      +</p> <ul style="list-style-type: none"> <li>14W: 26-1/2"</li> <li>21W: 38-5/16"</li> <li>28W: 50-1/16"</li> <li>35W: 61-15/16"</li> <li>2121W: 72-5/8"</li> <li>2828W: 96-1/8"</li> </ul>	<p>+      +</p> <ul style="list-style-type: none"> <li>U: 120V-277V</li> <li>347: 347V</li> <li>CF: consult factory for specialize voltage</li> </ul>	<p>+      +</p> <ul style="list-style-type: none"> <li><b>[Non-Dimming]</b></li> <li>PRS: program rapid start</li> <li><b>[Dimming]</b></li> <li>MKX: Advance Mark 10</li> <li>VII: Advance Mark 7</li> <li>H300: Lutron Hi-Lume 3D</li> <li>ESYS: Lutron EcoSystem</li> <li>ECO: Lutron Eco-10</li> <li>EHD: Lutron EcoSystem H</li> <li>DALI: Dali T5</li> <li>PHO: Sylvania Helios</li> <li>SD95-50: Universal BallaSTAR</li> <li>SD115-50: Universal BallaSTAR</li> <li>PSNS: PowerSense</li> <li>TEN: SuperDim</li> </ul>	<p>+      +</p> <ul style="list-style-type: none"> <li><b>[Custom Performance]</b></li> <li>PH: 1.15BF program start</li> <li>PN85: 0.85BF program start</li> <li>PN90: 0.90BF program start</li> <li>PN95: 0.95BF program start</li> <li>PXL51: 0.57BF prgm str</li> <li><b>[Emergency]</b></li> <li>I28: Iota ISL-28</li> <li>I54: Iota ISL-54</li> <li>I540: Iota ISL-540-35W</li> <li>L28: Iota ISL-28</li> <li>L50: Bodine LP500</li> <li>L55: Bodine LP5500</li> <li>L60: Bodine LP600</li> <li>L60S: Bodine LP600STU</li> </ul>	<p>+      +</p> <ul style="list-style-type: none"> <li>F: frosted</li> <li>P: linear prismatic</li> </ul>	<p>+      +</p> <ul style="list-style-type: none"> <li>SMC: surface mount ceiling</li> <li>SMW: surface mount wall</li> <li>CM48: cable mount 48" cable length</li> <li>CM96: cable mount 96" cable length</li> <li>PM18: pendant mount 18" stem length</li> <li>PM24: pendant mount 24" stem length</li> <li>PM30: pendant mount 30" stem length</li> <li>CF: consult factory for custom length (for 2 lamp HO, consult factory)</li> </ul>	<p>+      +</p> <ul style="list-style-type: none"> <li>WH: white</li> <li>BL: black</li> <li>SL: silver</li> <li>PT: platinum</li> <li>BZ: bronze</li> <li>PR: primer</li> <li>CF: consult factory for custom color</li> </ul>
---	--	---	--	--	---	--	--


\*\*Pendant and Cable mount ONLY for 2 lamp HO applications. Consult factory for Surface Mount option.

\*Not all ballasts work with all lamps. Consult factory for details.

Profile

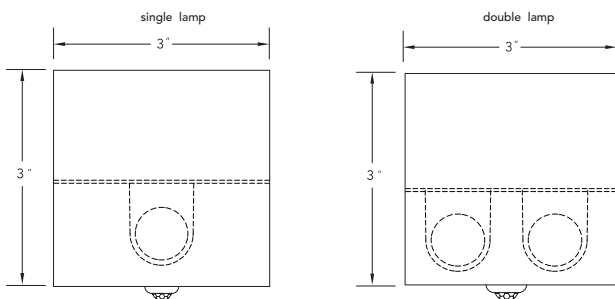

Top View



Side View

