



# FAUX30(BSS208)-4-35-ND-R-1-SM-SN-AW

**Luminaire Description:** White rectangular metal housing with plastic diffuse lens  
**Lamp:** 96 White LEDs  
**Mounting:** Surface – Ceiling  
**Ballast/Driver:** One (1) Philips Advance XI040C110V054BST1

Luminaire



### Luminaire Characteristics

Luminous Length: 44.50 in.  
Luminous Width: 2.000 in.

### Summary of Results

#### Integrating Sphere

Luminous Flux: 2391 Lumens  
Efficacy: 82.78 lm/w  
CCT: 3576 K  
CRI (Ra): 94.2

#### Distribution

Total Luminaire Output: 2331 Lumens  
Luminaire Efficacy: 80.6 lm/w  
Maximum Candela: 855 Candela

#### Electrical Data at 120 VAC

Test Temperature: 25.1 °C  
Voltage: 120.1 VAC  
Current: 0.2419 A  
Power: 28.88 W  
Power Factor: 0.995  
Frequency: 60 Hz  
Current THD: 8.69 %





## Color Quality - Integrating Sphere

### Integrating Sphere Test Conditions

Temperature	Voltage	Current	Power	Power Factor	Frequency	Current THD
25.1 °C	120.1 VAC	0.2419 A	28.88 W	0.995	60 Hz	8.69 %


### Summary of Results

<b>Total Output:</b>	2391 Lumens	<b>Chromaticity (x):</b>	0.4002
<b>Efficacy:</b>	82.8 lm/w	<b>Chromaticity (y):</b>	0.3863
<b>CCT:</b>	3576 K	<b>Chromaticity (u'):</b>	0.2342
<b>CRI (Ra):</b>	94.2	<b>Chromaticity (v'):</b>	0.5086
<b>CRI (R9):</b>	76.8	<b>TM-30 Rf:</b>	92.3
<b>Peak Wavelength:</b>	625 nm	<b>TM-30 Rg:</b>	100.8
<b>Dominant Wavelength:</b>	581 nm	<b>Duv:</b>	-0.0009
<b>S/P Ratio:</b>	1.64		

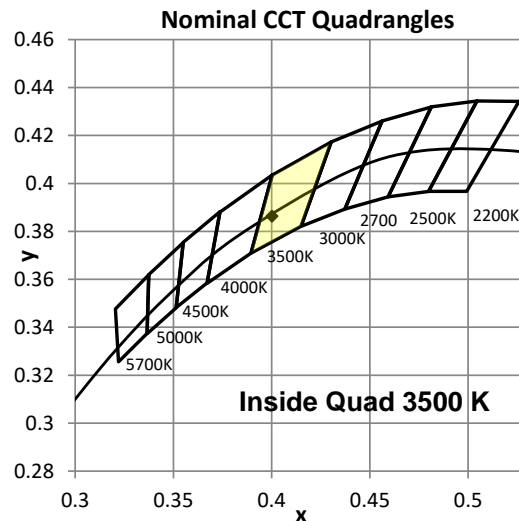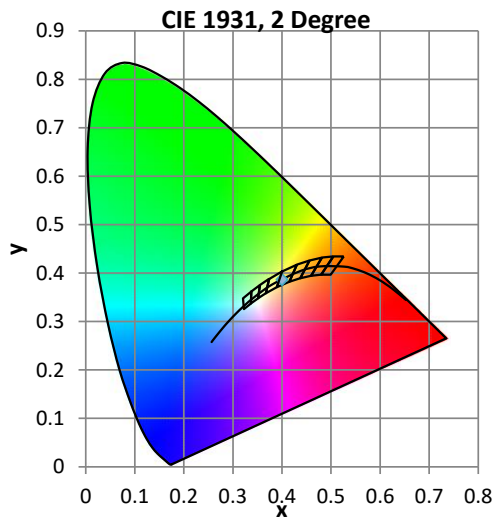

### Color Rendering Index Detail

Ra (CRI)	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
94.2	95.1	95.8	94.3	94.8	94.1	93.0	95.9	90.9	76.8	88.6	94.4	76.8	95.3	96.3	94.0

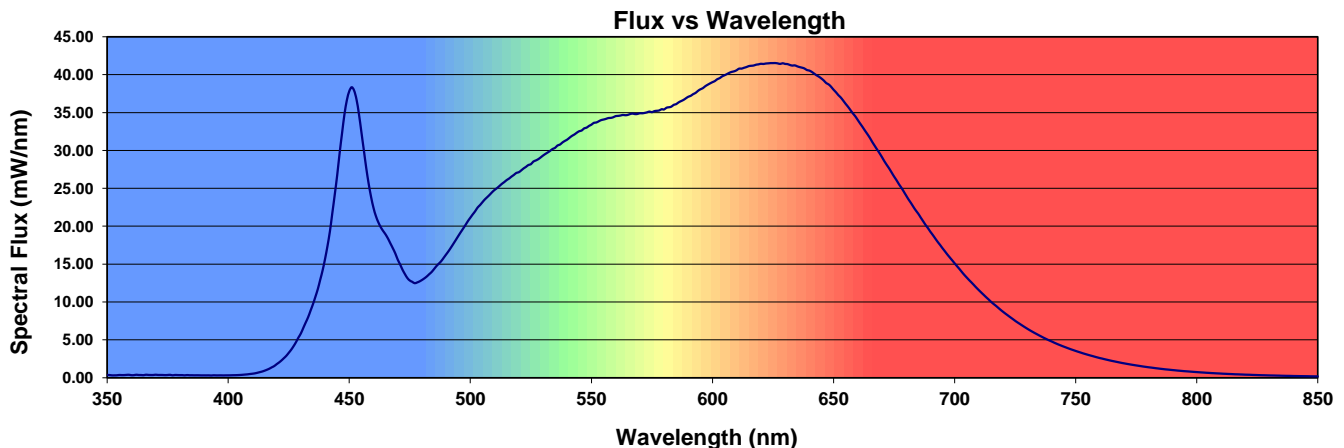



## Distribution - Goniophotometer

### Distribution Test Conditions


Temperature	Voltage	Current	Power	Power Factor	Frequency	Current THD
24.8 °C	120.0 VAC	0.2421 A	28.91 W	0.995	60 Hz	8.70 %

### Summary of Results

**Spacing Criteria**  
 0-180: 1.22  
 90-270: 1.22

**Total Lumen Output:** 2331 Lumens  
**Luminaire Efficacy:** 80.6 lm/w  
**Maximum Candela:** 855 Candela

### Polar Plot

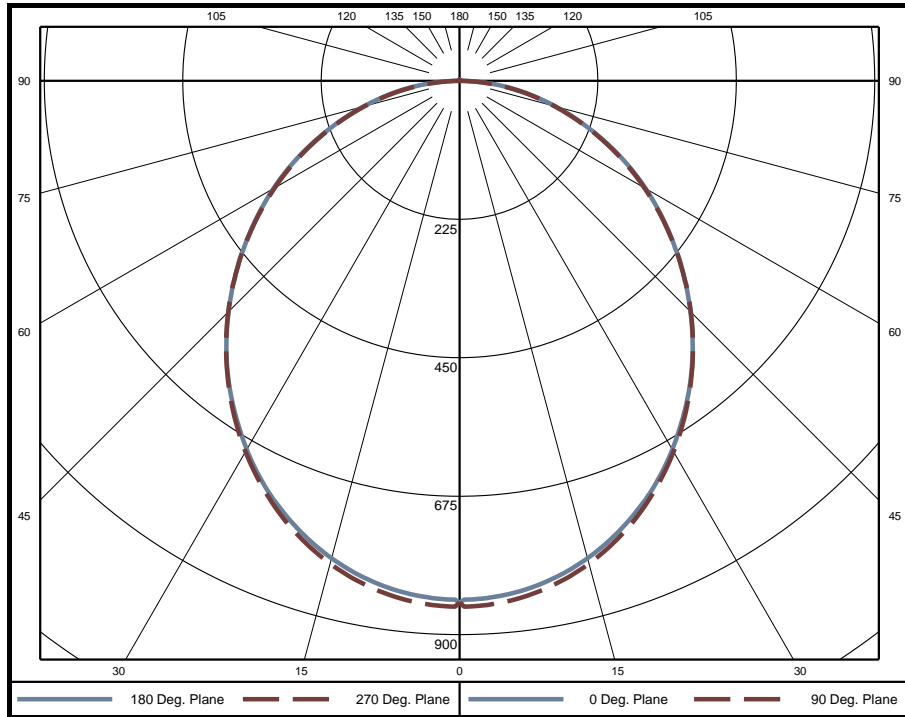

### Zonal Lumen Summary

Zone	Lumens	% of Luminaire	Zone	Lumens	% of Luminaire	Zone	Lumens	% of Luminaire
0-5	20.2	0.9%	60-65	153.3	6.6%	120-125	0	0.0%
5-10	59.8	2.6%	65-70	127.8	5.5%	125-130	0	0.0%
10-15	97.0	4.2%	70-75	99.9	4.3%	130-135	0	0.0%
15-20	130.4	5.6%	75-80	70.7	3.0%	135-140	0	0.0%
20-25	158.7	6.8%	80-85	41.4	1.8%	140-145	0	0.0%
25-30	180.9	7.8%	85-90	13.1	0.6%	145-150	0	0.0%
30-35	196.6	8.4%	90-95	0	0.0%	150-155	0	0.0%
35-40	205.4	8.8%	95-100	0	0.0%	155-160	0	0.0%
40-45	207.3	8.9%	100-105	0	0.0%	160-165	0	0.0%
45-50	202.5	8.7%	105-110	0	0.0%	165-170	0	0.0%
50-55	191.4	8.2%	110-115	0	0.0%	170-175	0	0.0%
55-60	174.7	7.5%	115-120	0	0.0%	175-180	0	0.0%

Zone	Lumens	% of Luminaire
0-40	1049	45.0%
0-60	1825	78.3%
0-90	2331	100.0%
90-180	0	0.0%



**Candela Tabulation**  
Horizontal Angle (Degrees)

	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5
0	847.8	847.8	847.8	847.8	847.8	847.8	847.8	847.8	847.8	847.8	847.8	847.8	847.8	847.8	847.8	847.8
5	838.5	842.8	843.1	842.2	850.0	842.2	843.1	842.8	838.5	842.8	843.1	842.2	850.0	842.2	843.1	842.8
10	825.1	829.0	828.9	827.8	835.5	827.8	828.9	829.0	825.1	829.0	828.9	827.8	835.5	827.8	828.9	829.0
15	803.0	806.6	806.6	805.3	812.5	805.3	806.6	806.6	803.0	806.6	806.6	805.3	812.5	805.3	806.6	806.6
20	772.9	776.1	775.6	774.0	781.0	774.0	775.6	776.1	772.9	776.1	775.6	774.0	781.0	774.0	775.6	776.1
25	736.1	738.4	737.0	735.3	741.4	735.3	737.0	738.4	736.1	738.4	737.0	735.3	741.4	735.3	737.0	738.4
30	691.6	694.3	692.2	690.4	696.0	690.4	692.2	694.3	691.6	694.3	692.2	690.4	696.0	690.4	692.2	694.3
35	642.3	644.8	642.5	640.1	644.8	640.1	642.5	644.8	642.3	644.8	642.5	640.1	644.8	640.1	642.5	644.8
40	589.0	591.3	588.3	585.9	589.7	585.9	588.3	591.3	589.0	591.3	588.3	585.9	589.7	585.9	588.3	591.3
45	530.9	534.5	531.0	528.1	531.8	528.1	531.0	534.5	530.9	534.5	531.0	528.1	531.8	528.1	531.0	534.5
50	471.2	475.3	471.3	468.4	470.5	468.4	471.3	475.3	471.2	475.3	471.3	468.4	470.5	468.4	471.3	475.3
55	409.9	413.1	408.6	406.9	408.6	406.9	408.6	413.1	409.9	413.1	408.6	406.9	408.6	406.9	408.6	413.1
60	349.0	349.7	346.0	344.5	346.1	344.5	346.0	349.7	349.0	349.7	346.0	344.5	346.1	344.5	346.0	349.7
65	286.2	286.2	282.9	282.1	283.2	282.1	282.9	286.2	286.2	286.2	282.9	282.1	283.2	282.1	282.9	286.2
70	222.3	223.3	221.0	220.3	220.4	220.3	221.0	223.3	222.3	223.3	221.0	220.3	220.4	220.3	221.0	223.3
75	162.3	162.1	161.4	160.0	160.1	160.0	161.4	162.1	162.3	162.1	161.4	160.0	160.1	160.0	161.4	162.1
80	105.7	104.9	103.8	102.6	102.7	102.6	103.8	104.9	105.7	104.9	103.8	102.6	102.7	102.6	103.8	104.9
85	51.2	50.7	49.1	47.8	47.2	47.8	49.1	50.7	51.2	50.7	49.1	47.8	47.2	47.8	49.1	50.7
90	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
115	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
125	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

**Average Luminance (cd/m<sup>2</sup>)**

Horizontal Angle (Degrees)

	0	45	90
0	14770	14770	14770
45	13080	13080	13100
55	12450	12410	12410
65	11790	11660	11670
75	10920	10860	10780
85	10240	9814	9422




### Coefficients of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance 20%

Ceiling Cavity Reflectance	80				70				50			30			10			0
Wall Reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Room Cavity Ratio (RCR)	** Values are expressed as percent of total lumen output delivered to the task surface **																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	109	104	99	95	106	101	97	94	97	94	91	93	90	88	90	87	85	83
2	99	90	83	78	96	88	82	77	85	79	75	81	77	73	78	75	71	69
3	90	79	71	64	87	78	70	64	75	68	63	72	66	62	69	65	61	58
4	82	70	61	55	80	69	61	54	66	59	53	64	58	53	62	56	52	50
5	76	63	54	47	74	62	53	47	60	52	46	58	51	46	56	50	45	43
6	70	57	48	41	68	56	47	41	54	46	41	52	45	40	50	45	40	38
7	65	51	42	36	63	50	42	36	49	41	36	47	41	36	46	40	35	33
8	60	47	38	32	59	46	38	32	45	37	32	44	37	32	42	36	32	30
9	56	43	35	29	55	42	35	29	41	34	29	40	34	29	39	33	29	27
10	53	40	32	27	52	39	32	26	38	31	26	37	31	26	36	30	26	24


Beam and Field Information	
CIE Type:	Direct
Center Beam Intensity:	847.8 Candela
Central Cone Intensity:	846 Candela
Beam Flux:	1607.0 Lumens
Beam Angle (0-180):	107.7 Degrees
Beam Angle (90-270):	107.5 Degrees
Field Angle (0-180):	163.8 Degrees
Field Angle (90-270):	163.1 Degrees

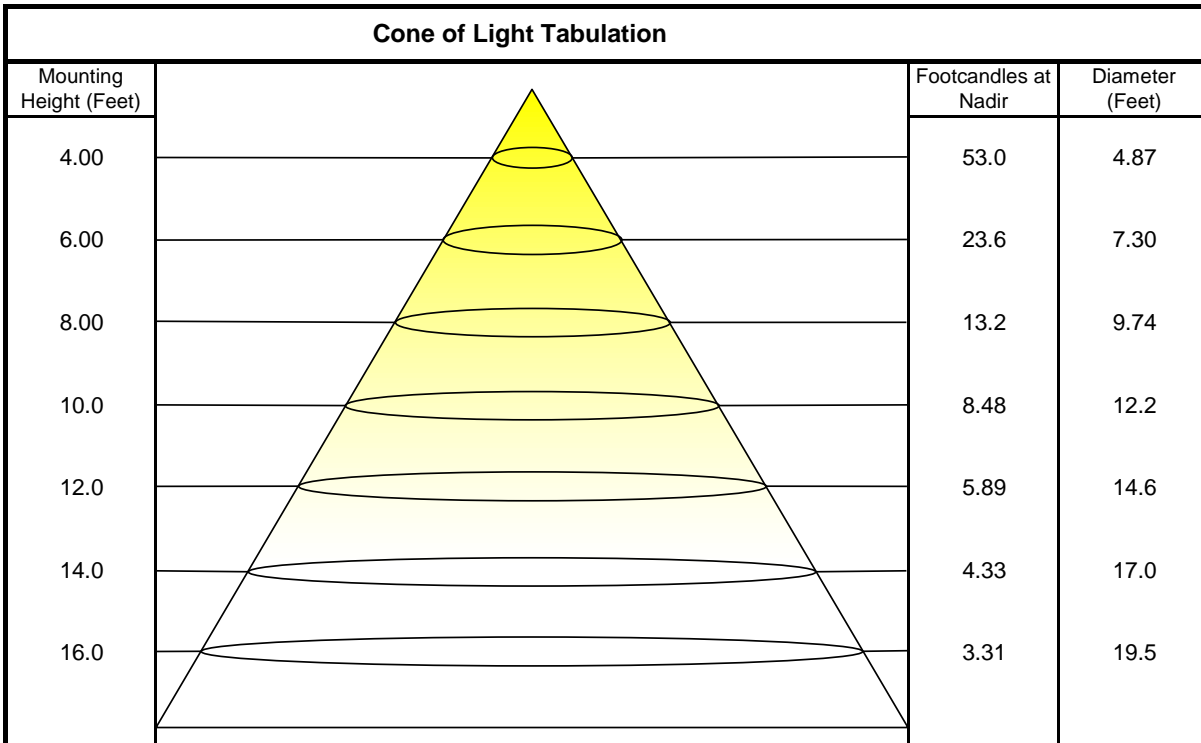



# ISOFootcandle Plot

Mounting Height - 8 Feet

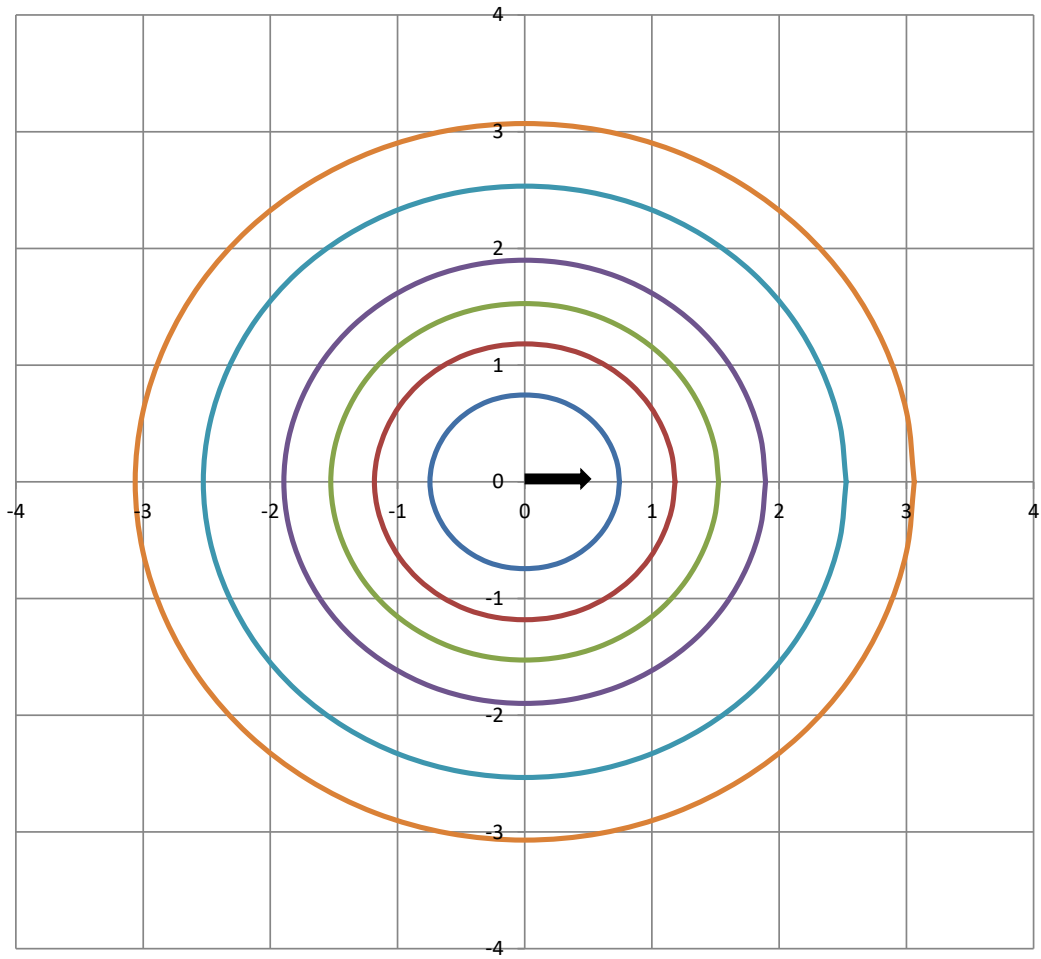

Grid Lines in Units of Mounting Height

