


HL2-Y | chill

2" aperture direct/indirect acoustic panel luminaire, Y-shape configuration

Project: _____ Type: _____

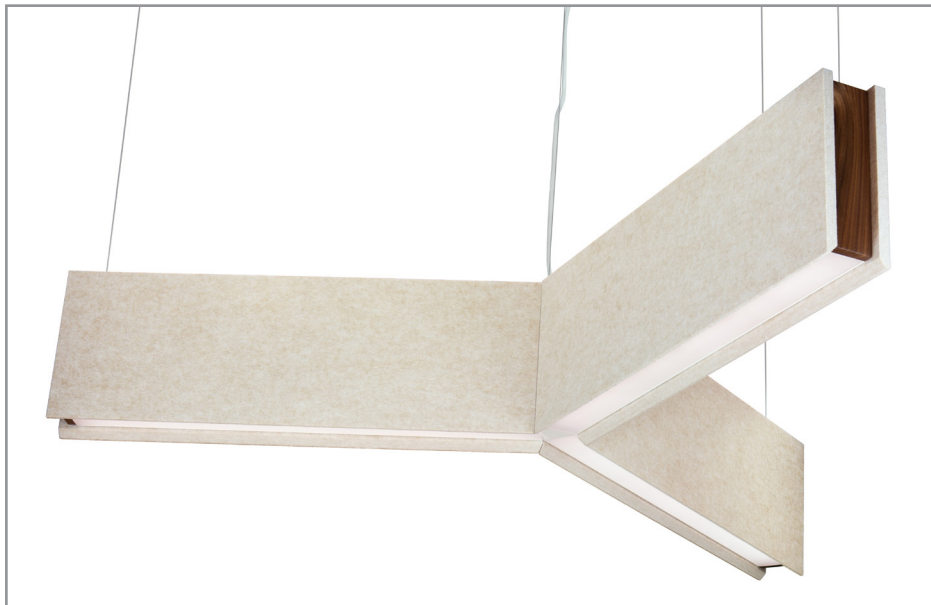

FEATURES

The Chill HL2-Y direct/indirect luminaire is designed to enhance interior spaces with subtle to bold colors, while damping sound reflections. The 2" wide aperture fixture, configured in a Y-shape, is clad with ½" thick felt acoustic panels in 8", 12" or 16" heights, 4', 6' and 8' nominal sizes and twenty standard colors. Fixture end treatments include matching acoustic material, machined aluminum end caps with powder coat or printed imagery options or solid wood end caps in a variety of finishes. The HL2-Y is Controls Capable, being offered with a variety of integrated control options. Add further sound absorption in an architectural space with complementing HB2-Y non-illuminated acoustic baffles.

SPECIFICATIONS

Fixture constructed of extruded aluminum, heavy gauge sheet formed steel and aluminum, extruded acrylic lenses and PET acoustic felt panels.

Fixture offered in sizes of 4', 6' and 8' nominal diameters.

The ½" thick, 100% PET (>75% recycled), fire rated (ASTM E84 Class B) 0.98 NRC acoustic felt panels feature a bottom beveled edge and are available in twenty standard colors.

Fixture end treatment options available in matching acoustic material or machined aluminum end caps with standard powder coat, optional RAL finishes, high resolution digital imagery or solid wood end caps.

Standard integral 120-277V driver offered with 0-10V dimming or non-dim (other dimming driver options available).

Integral 120-277V emergency battery backup available for non-dim or 0-10V fixtures, wired to operate the direct source (consult factory for details and for compatibility with other drivers).

Performance pending laboratory testing.

LEDs available in 2700K, 3000K, 3500K and 4000K, within a 3 step MacAdam ellipse, all with 90+ CRI typical.


Bartco Lighting Controls Capable fixture available with integrated controls from a variety of suppliers.

Life: 50,000 hours L₇₀.


Limited five year warranty.

UL and C-UL listed for dry locations.

SECTION

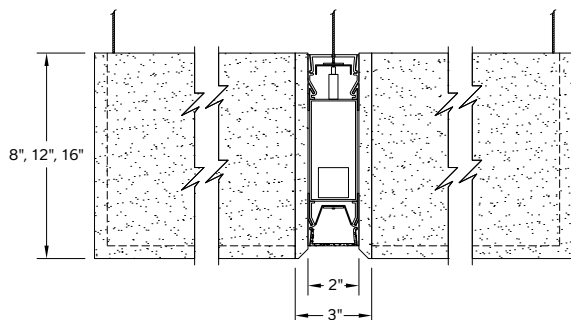

PLAN






HL2-Y | chill


2" aperture direct/indirect acoustic panel luminaire, Y-shape configuration



HL2-Y -												
HEIGHT 8: 8" 12: 12" 16: 16"		BOTTOM EDGE TREATMENT DB: drop beveled edge CF: consult factory for custom edge treatment		END FINISH code from color key: ----- CF: consult factory for custom end finish		DRIVER ND: non-dimming [Dimming] D: 0-10V, 1% DTR: triac, 1% DLV: electronic low voltage, 1% HES: Lutron Eco- System, soft-on/ fade-to-black, 1% EL: eldoLED ECO- drive 0-10V, 1% ES: eldoLED SOLOdrive 0-10V, 0.1% ELD: eldoLED ECODrive DALI, 1% ESD: eldoLED SOLOdrive DALI, 0.1%		INDIRECT LIGHT CONFIGURATION L1: low output, Lambertian dist. R1: reg. output, Lambertian dist. H1: high output, Lambertian dist. VH1: very high output, Lambertian dist. NA: no indirect light source CF: consult factory for custom configuration		MOUNT C4: cable mount 4' cable length C8: cable mount 8' cable length		PANEL FINISH code from color key: ----- CF: consult factory for custom finish
NOMINAL SIZE 4: 48" 6: 72" 8: 96"		END TREATMENT 1: extended panels 2: acoustic CF: consult factory for custom end treatment		CORRELATED COLOR TEMPERATURE 27: 2700K-90+ CRI 30: 3000K-90+ CRI 35: 3500K-90+ CRI 40: 4000K-90+ CRI		CIRCUIT 1: single circuit 2: two circuit		DIRECT LIGHT CONFIGURATION LA: low output, flush lens RA: reg. output, flush lens HA: high output, flush lens NA: no direct light source CF: consult factory for custom output		OPTIONS ED: emergency driver (SINGLE CIRCUIT, non- dim or 0-10V only) WS1A: Wattstopper FS- 205, 100%-0% ‡ WS1B: Wattstopper FS- 205, 100%-50% ‡ EN1: Enlighted FS-D22 ‡ ES4: Philips EasySense SNS211 MC ‡ CA1: Casambi CBU-A2D ‡ NL1: nLight RES7 ‡ NL2: nLight RIO ‡ LA1: Lutron Athena A-WN-D01-RF-WH ‡ LA2: Lutron Athena A-WN-D01-OCC-WH ‡		

‡ See Integrated Controls section for driver compatibility information.

‡ See Integrated Controls section for driver compatibility information.

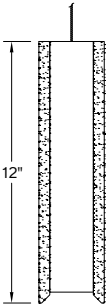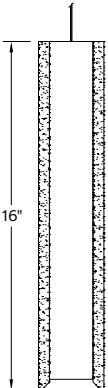HEIGHT		
ORDER CODE 8		
ORDER CODE 12		
ORDER CODE 16		

BOTTOM EDGE TREATMENT		
ORDERING CODE	DESCRIPTION	SPECIFICATIONS
	DB DROP BEVEL EDGE	Bottom edge of panels extends 1/2" below the lens, finished with a 45 degree bevel.


END TREATMENT			
	ORDERING CODE	DESCRIPTION	SPECIFICATIONS
	1	EXTENDED PANELS	Panel ends extend 1/2" beyond the housing length. Includes machined aluminum end cap.
	2	ACOUSTIC	Acoustic material end cap, bottom edge finished with 45 degree bevel.

END FINISH COLOR KEY

NOTE: For End Treatment 2 (acoustic), the end finish will be the same as the specified panel finish.


POWDER COAT FINISH OPTIONS
Applies to End Treatment 1 (extended panels).
Finish applied to machined aluminum end cap.
When the indirect or direct light source options are omitted, the visible fixture will be finished to match.

AW




Architectural White

WH




White (semi-gloss)

BL




Black (semi-matte)

MB




Matte Black

ESS




Environmental Satin Silver

BZ




Bronze

RAL



Select from options on the Panel Color Key

CF



Custom Finish Consult Factory

END FINISH COLOR KEY (CONTINUED)

WOOD END CAP OPTIONS

Applies to End Treatment 1 (extended panels).

Furniture grade caps are 1/2" thick and hand finished in clear shellac with a liquid wax sealer.

WN




Solid Walnut

EB




Solid European
Beech

MH




Solid Mahogany

WO




Solid White Oak

BB



Bamboo Ply

P01



Baltic Birch Ply
Natural Maple

P02




Baltic Birch Ply
Red Stained Maple

P03




Baltic Birch Ply
Orange Stained Maple

P04



Baltic Birch Ply
Green Stained Maple

P05




Baltic Birch Ply
Blue Stained Maple

FAUX FINISH OPTIONS

Applies to End Treatment 1 (extended panels).

Finish comprised of a multi-stage application process that produces durable, high resolution imagery.

FXW



Faux Walnut

FXP



Faux Pine

FXWO




Faux White Oak

FXC




Faux Cherry

FCF




Custom Faux Finish
Consult Factory


INDIRECT LIGHT CONFIGURATION

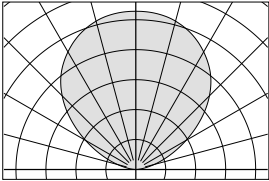ORDERING CODE	DESCRIPTION	SPECIFICATIONS
	L1	Low light output - Lambertian distribution
	R1	Regular light output - Lambertian distribution
	H1	High light output - Lambertian distribution
	VH1	Very high light output - Lambertian distribution
		Lightly diffuse extruded acrylic lens for general Lambertian distribution

DIRECT LIGHT CONFIGURATION

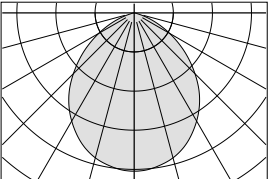ORDERING CODE	DESCRIPTION	SPECIFICATIONS
	LA	Low light output - flush lens
	RA	Regular light output - flush lens
	HA	High light output - flush lens
		Flush, frosted extruded acrylic lens

MOUNTING

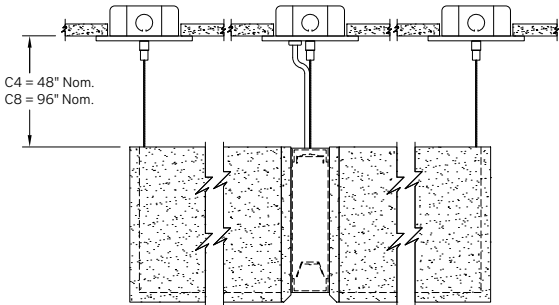ORDERING CODE	DESCRIPTION	SPECIFICATIONS
	C4 and C8	CABLE MOUNT
		Mounting option includes: <ul style="list-style-type: none">• Ø 1/16" x 48" (C4) or 96" (C8) aircraft cables• 60" (C4) or 108" (C8) power cable in coordinating finish• Ceiling couplers, cable grippers and Ø 5" white canopies <p>NOTE: WHEN DUAL CIRCUIT OPTION IS USED, TWO POWER CABLES ARE REQUIRED</p>

OPTIONS



ORDERING CODE	DESCRIPTION	SPECIFICATIONS
ED	EMERGENCY LED DRIVER	<ul style="list-style-type: none">• Universal 120-277V input voltage emergency driver delivers initial minimum power of 10W for 90 minutes.• Available with non-dim or 0-10V driver/s, operating the direct source (consult factory for details and compatibility with other drivers).• Indicator lamp/test switch located on the underside at an end.

OPTIONS – INTEGRATED CONTROLS

Note: Control option takes up 4" of the overall lens length. Controls are mounted to flush filler piece, in Architectural White finish, located at an end.



Controls
Capable

	ORDERING CODE	LIGHT OUTPUT SETTING	MODEL	CONTROL PROTOCOL	FUNCTIONS	COMPATIBLE DRIVERS
 WATTSTOPPER®	WS1A	100% – 0% ¹	FS-205	N/A	PIR occupancy and light level sensor.	For use with on/off or 0-10V dimming drivers only.
	WS1B	100% – 50% ¹				
	EN1	Set during commissioning	FS-D22	Bluetooth Wireless	PIR occupancy, ambient light sensing, daylight harvesting, and environment monitoring for use within an Enlighted control network.	Provided with Advance sensor ready series 0-10V dimming drivers.
 EasySense	ES4	Set during commissioning	SNS211 MC	Bluetooth Wireless	Occupancy, daylight harvesting and task tuning sensor with advance grouping, for use within a MasterConnect network.	Provided with Advance sensor ready series 0-10V dimming drivers.
	CA1	Set during commissioning	CBU-A2D	Bluetooth Wireless	0-10V/DALI driver controller, for use within a Casambi ecosystem.	For use with 0-10V or DALI drivers. Consult factory for details.
	NL1	Set during commissioning	RES7 ²	Radio Wireless	Dimming, PIR occupancy detection and daylight harvesting, for use within an nLight AIR network.	Provided with Advance sensor ready series or eldoLED 0-10V drivers.
	NL2		RIO ²		Dimming, for use within an nLight AIR network.	
	LA1	Set during commissioning	A-WN-D01-RF-WH	Radio Wireless	Dimming only for use with an Athena control system.	Provided with Advance sensor ready series or eldoLED 0-10V or eldoLED DALI-2 drivers.
	LA2		A-WN-D01-OCC-WH		Dimming, PIR occupancy and daylight sensor for use with an Athena control system.	

1. Consult factory for custom light output setting.
2. Consult your Acuity representative for application-specific model number.

ACOUSTIC PANEL COLOR KEY

Chill acoustic panels are made from 100% PET (>75% recycled) colored felt fibers. The 1/2" thick, cohesive material construction traps sound waves and aids in reducing sound reflections within interior spaces (0.98 NRC). Lightweight and durable, the panels are also fire rated (ASTM E84 Class B). The twenty standard colors can be paired with matching acoustic ends, wood end caps or metal end caps in six standard powder coat finishes, optional coordinating RAL colors or Faux finishes.

Note: Ordering Code shown above color image.

Optional coordinating RAL finish for end cap and unlit areas shown in parenthesis.

01



White
(RAL 9003)

02



Granite
(RAL 7047)

03




Overcast
(RAL 7004)

04




Slate
(RAL 7039)

05



Lava Rock
(RAL 7016)

06



Black Sand
(RAL 7022)

07



Black
(RAL 9004)

08



Light Sand
(RAL 1013)

09




Dark Sand
(RAL 1019)

10



Mango
(RAL 1017)

11




Poppy
(RAL 2011)

12



Hibiscus
(RAL 3031)

13




Burgundy
(RAL 4002)

14




Violet
(RAL 4005)

15



Marine Blue
(RAL 5011)

16



Deep Sea
(RAL 5002)

17



Sky Blue
(RAL 5007)

18



Laguna Blue
(RAL 5012)

19



Emerald
(RAL 6012)

20



Lime
(RAL 6011)