


HCB01 | Swell


2" wide LED luminaire with flush lens, Illuminated by BIOS®



Project: _____ Type: _____

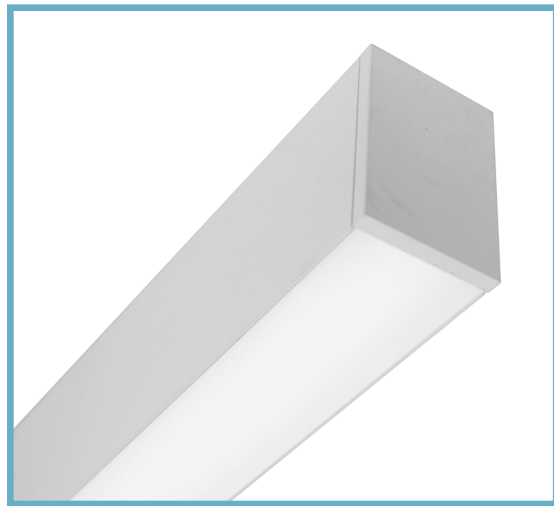

SECTION



PERFORMANCE

NOMINAL LENGTH	OUTPUT	LUMENS/ft.	WATTS/ft.	LUMINAIRE LUMENS	EFFICACY (LPW)
4'	R: regular	640	9.7	2377	66
	H: high	850	13.4	3169	64

Note: All data reflects fixture with BIOS Static Spectrum 3500K LEDs and Lambertian optic option.

FEATURES

The Swell Series HCB01 is a linear LED luminaire tailored for health-centric lighting installations. The 2" wide by 3" tall extrusion is fitted with a flush lens and machined aluminum end caps. The HCB01 is Controls Capable, being offered with a variety of integrated control options.

The HCB01 fixture is embedded with BIOS SkyBlue® circadian solutions to produce the healthy "blue sky" light signal needed to stimulate human circadian biology. This specific light wavelength communicates directly with human biology through a non-visual photoreceptor to regulate circadian rhythms, providing healthier sleep patterns and ultimately, better health.

SPECIFICATIONS

Fixture constructed of an extruded aluminum housing, extruded, frosted acrylic lens and machined aluminum end caps.

Model variations offered for surface, wall mount and cable suspended applications.

Optic options include an acrylic frosted flush, acrylic Fresnel wall wash lens (for surface or cable mount fixtures) and flat blade louver.

Standard finishes as shown below.

Available in nominal lengths of 2'–8' single fixtures and continuous runs.

Basic continuous run fixtures provided with 18 ga. wiring harness for 6 Amp maximum load (consult factory for runs requiring multiple circuits, sensor integration, etc.).

Standard integral 120-277V driver offered with 0-10V dimming or non-dim (consult factory regarding other dimming protocols).

Integral 120-277V emergency battery backup available for 4' or 8' nominal non-dim or 0-10V (consult factory for all other lengths/drivers).

Standard light outputs are 640 and 850 lumens per foot for the Lambertian optic option.

BIOS LEDs have 80+ CRI, R9 90+ and are available in static 3000K, 3500K, 4000K and two dynamic options in 2700-3000K, 2700-3500K and 2700-4000K.

Bartco Lighting Controls Capable fixture available with integrated controls from a variety of suppliers.

Life: 50,000 hours L₇₀.

Limited five year warranty.

UL and C-UL listed for dry and damp locations.



HCB01 –

NOMINAL FIXTURE LENGTH*	CORRELATED COLOR TEMPERATURE	DRIVER	LIGHT OUTPUT (lumens per foot w/optic option 1)	MOUNT	OPTIONS	FINISH
2: 22-5/8"	[BIOS static] BS30: 3000K	ND: non-dimming	R: regular – 640	SM: surface mount	ED: emergency driver (4' or 8' nom. non-dim or 0-10V only)	AW: architectural white (semi-matte)
3: 33-5/8"	BS35: 3500K	[Dimming] D: 0-10V, 1%	H: high – 850	WD: wall mount – direct	WS1A: Wattstopper FS-205, 100%-0% ‡	WH: white (semi-gloss)
4: 44-5/8"	BS40: 4000K	DTR: triac, 1%, (120V ONLY) ‡‡	CF: consult factory for custom output	WI: wall mount – indirect	WS1B: Wattstopper FS-205, 100%-50% ‡	BL: black (semi-matte)
5: 55-5/8"	[BIOS dynamic] BD30: 2700K-3000K	DLV: electronic low voltage, 1%, (120V ONLY) ‡‡		C4: cable mount 4' cable length	ES4: Philips EasySense SNS211 MC ‡	MB: matte black
6: 66-5/8"	BD35: 2700K-3500K	HES: Lutron EcoSystem, soft-on/fade-to-black, 1% ‡‡		C8: cable mount 8' cable length	CA1: Casambi CBU-A2D ‡	ESS: environmental satin silver
7: 77-5/8"	BD40: 2700K-4000K	EL: eldoLED ECOdrive 0-10V, 1%			NL1: nLight RES7 ‡	BZ: bronze
8: 88-5/8"	[BIOS dynamic TW] BDTW30: 2700K-3000K BDTW35: 2700K-3500K BDTW40: 2700K-4000K	ES: eldoLED SOLOdrive 0-10V, 0.1% ELD: eldoLED ECOdrive DALI, 1% ‡‡ ESD: eldoLED SOLOdrive DALI, 0.1% ‡‡		OPTIC 1: Lambertian 2: wall wash** L: louver	RUN CONFIGURATION SN: single ST: starter AD: adder TR: terminator	PR: primer CF: consult factory for custom finish SA: satin anodize (may require additional lead time)

* Actual dimension dependent on run configuration.

** Wall Wash optic available for Surface Mount (SM) and Cable Mount (C4, C8) only.

‡ See Integrated Controls section for driver compatibility information.




‡‡ Consult factory for dimming protocols other than 0-10V.

HCB01 | Swell

2" wide LED luminaire with flush lens, Illuminated by BIOS®

CORRELATED COLOR TEMPERATURE

Consult factory for specifics when using dimming protocols other than 0-10V.
For additional information about BIOS LED modules, visit www.bartcolighting.com/series/swell/

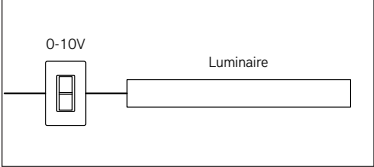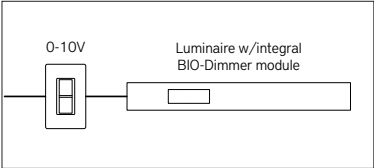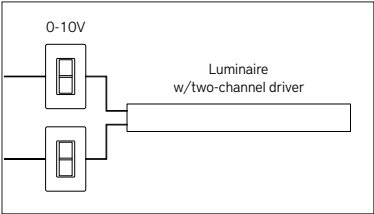ORDERING CODE	MODULE TYPE	LIGHT EFFECT	CONTROL METHOD
BS30 BS35 BS40	BIOS Static	<ul style="list-style-type: none">Static color temperature490nm SkyBlue® LED is always on.	<ul style="list-style-type: none">Non-dimming or 0-10VNo BIO-Dimming module required <div><div>0-10V</div><div></div></div>
BD30 BD35 BD40	BIOS Dynamic	<ul style="list-style-type: none">490nm SkyBlue® LED can be BIO dimmed out with most driver/dimmer combinations.490nm SkyBlue® wavelengths removed through first 20% of dimming range, followed by a CCT transition to 2700K.	<ul style="list-style-type: none">0-10VIncludes integral Bio-Dimming module <div><div>0-10V</div><div></div></div>
BDTW30 BDTW35 BDTW40	BIOS Dynamic Tunable White	<ul style="list-style-type: none">CCT and Light output can be controlled separately with appropriate driver.3000K, 3500K and 4100K modules all transition to 2700K when dimmed.	<ul style="list-style-type: none">0-10V two-channel driverNo BIO-Dimming module required <div><div>0-10V</div><div></div></div>

HCB01 | Swell

2" wide LED luminaire with flush lens, Illuminated by BIOS®



OPTIC

ORDERING CODE	DESCRIPTION	SPECIFICATIONS
1	LAMBERTIAN DISTRIBUTION	Frosted extruded acrylic lens for general Lambertian distribution.
2	WALL WASH	Acrylic extrusion with optically engineered Fresnel prisms for wall wash applications. Available for Surface (SM) or Cable (C4, C8) mounting only. Optimized for placement 18"-24" from a wall surface. Uniformity ratio as low as 4:1.
L	LOUVER	2" W Flat blade louver with 5/8" blades at 7/8" spacing, formed from sheet steel. Finish is Environmental Satin Silver (consult factory for alternate finishes). Supplied with light diffusion film.

MOUNTING

ORDERING CODE	DESCRIPTION
SM	SURFACE MOUNT Use appropriate fastener through Ø3/16" holes in housing.
WD	WALL MOUNT – DIRECT ORIENTATION <ul style="list-style-type: none"> 1-7/8" H x 4-1/2" W sheet aluminum bracket projects the fixture housing 3/4" from the wall surface. Bracket finish matches fixture finish, or ESS for satin anodize (SA) housing.

MOUNTING (CONTINUED)

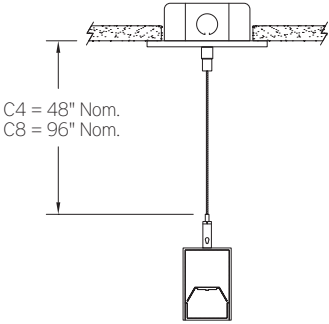	ORDERING CODE	DESCRIPTION
	WI	<div>WALL MOUNT – INDIRECT ORIENTATION</div> <ul style="list-style-type: none">1-7/8" H x 4-1/2" W sheet aluminum bracket projects the fixture housing 3/4" from the wall surface.Bracket finish matches fixture finish, or ESS for satin anodize (SA) housing.
	C4 and C8	<div>CABLE MOUNT</div> <div>Mounting option includes:</div> <ul style="list-style-type: none">Ø 1/16"x 48" (C4) or 96" (C8) aircraft cables60" (C4) or 108" (C8) power cable (in coordinating finish)Bracket barsØ 5" white canopiesCeiling couplersSide exit cable grippers

OPTIONS





ORDERING CODE	DESCRIPTION	SPECIFICATIONS
ED	EMERGENCY LED DRIVER	<ul style="list-style-type: none">Universal 120-277V input voltage emergency driver delivers initial minimum power of 10W for 90 minutes.Available for 4' or 8' nominal length non-dim or 0-10V fixture only (consult factory for all other lengths/drivers).Indicator/test switch located on the top for C4/C8 mount and on the side at an end for SM mount.

OPTIONS – INTEGRATED CONTROLS

Note: Control option takes up 4" of the overall lens length.
Controls are mounted to flush filler piece.



Controls Capable

	ORDERING CODE	LIGHT OUTPUT SETTING	MODEL	CONTROL PROTOCOL	FUNCTIONS	COMPATIBLE DRIVERS
 legrand® WATTSTOPPER®	WS1A	100% – 0% ¹	FS-205	N/A	PIR occupancy and light level sensor.	For use with on/off or 0-10V dimming drivers only.
	WS1B	100% – 50% ¹				
 PHILIPS EasySense	ES4	Set during commissioning	SNS211 MC	Bluetooth Wireless	Occupancy, daylight harvesting and task tuning sensor with advance grouping, for use within a MasterConnect network.	Provided with Advance sensor ready series 0-10V dimming drivers.
CASAMBI	CA1	Set during commissioning	CBU-A2D	Bluetooth Wireless	0-10V/DALI driver controller, for use within a Casambi ecosystem.	For use with 0-10V or DALI drivers. Consult factory for details.
 nLIGHT	NL1	Set during commissioning	RES7 ²	Radio Wireless	Dimming, PIR occupancy detection and daylight harvesting, for use within an nLight AIR network.	Provided with Advance sensor ready series or eldoLED 0-10V drivers.
	NL2		RIO ²		Dimming, for use within an nLight AIR network.	
 LUTRON®	LA1	Set during commissioning	A-WN-D01-RF-WH	Radio Wireless	Dimming only for use with an Athena control system.	Provided with Advance sensor ready series or eldoLED 0-10V or eldoLED DALI-2 drivers.
	LA2		A-WN-D01-OCC-WH		Dimming, PIR occupancy and daylight sensor for use with an Athena control system.	

1. Consult factory for custom light output setting.

2. Consult your Acuity representative for application-specific model number.

HCB01 | Swell

2" wide LED luminaire with flush lens, Illuminated by BIOS®

LENGTH / MOUNTING DIMENSIONS


ORDERING CODE	LENGTH A	LENGTH B	LENGTH C	LENGTH D	LENGTH E
2	22-5/8"	22-3/8"	22-1/8"	16-5/8"	19-3/8"
3	33-5/8"	33-3/8"	33-1/8"	27-5/8"	30-3/8"
4	44-5/8"	44-3/8"	44-1/8"	38-5/8"	41-3/8"
5	55-5/8"	55-3/8"	55-1/8"	49-5/8"	52-3/8"
6	66-5/8"	66-3/8"	66-1/8"	60-5/8"	63-3/8"
7	77-5/8"	77-3/8"	77-1/8"	71-5/8"	74-3/8"
8	88-5/8"	88-3/8"	88-1/8"	82-5/8"	85-3/8"

RUN CONFIGURATION INFORMATION

ORDERING CODE	DESCRIPTION
SN	Single
ST	Starter
AD	Adder
TR	Terminator


RUN INFORMATION

Back Plan - Surface Mount Single Fixture Option

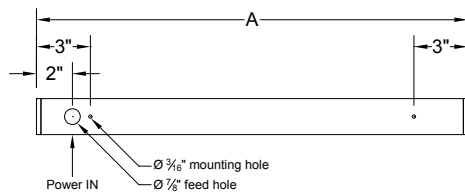

SN

Back Plan - Surface Mount Continuous Run Option

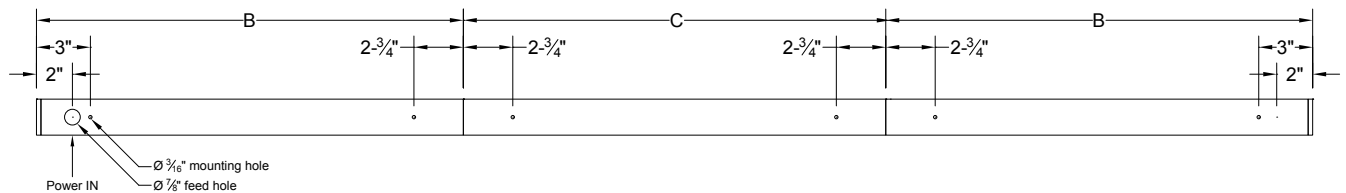


ST

AD

TR


Plan - Wall Mount Single Fixture Option

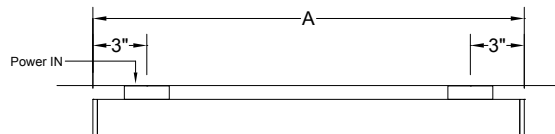


SN

RUN INFORMATION

Plan - Wall Mount Continuous Fixture Option

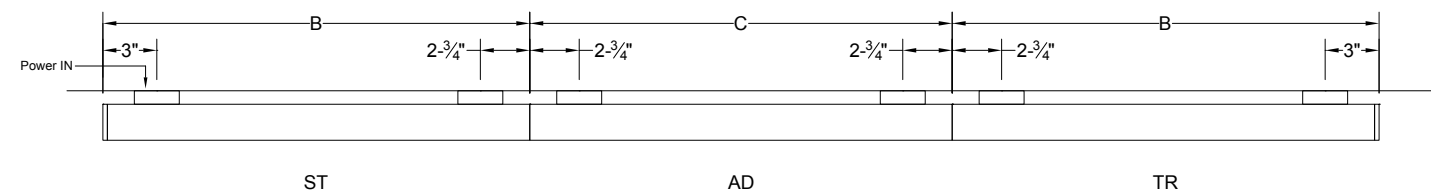

Side View - Cable Mount Single Fixture Option

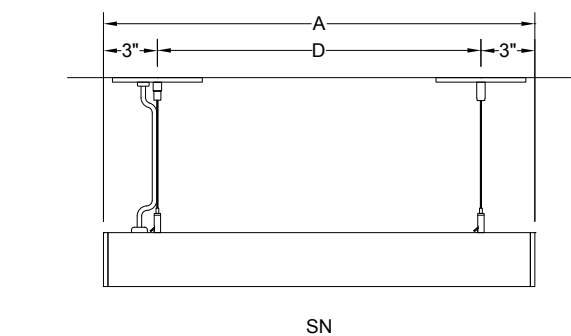

Side View - Cable Mount Continuous Run Option

